


## JN0-348 Dumps

### Enterprise Routing and Switching - Specialist (JNCIS-ENT)

<https://www.certleader.com/JN0-348-dumps.html>

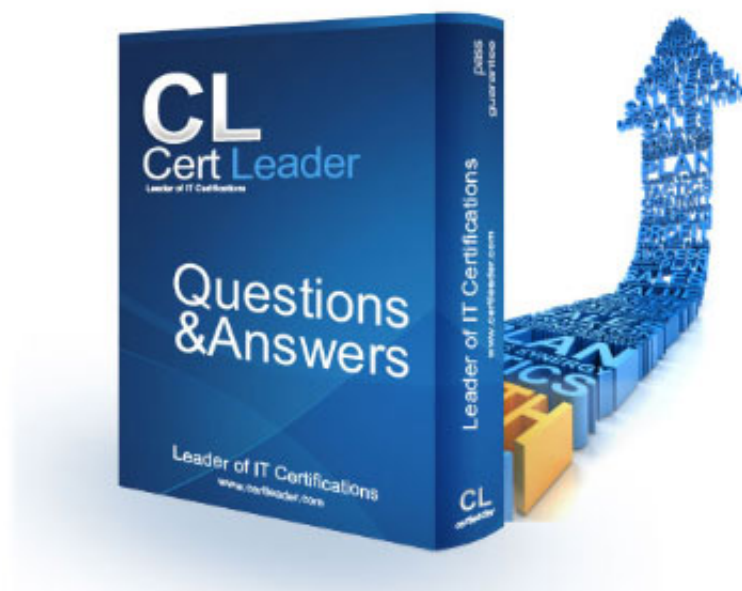

**NEW QUESTION 1**

You want to configure Layer 2 services over an IP-based tunneling mechanism between two sites. Which configuration statement is required to accomplish this task?

- A. Set interface gr-0/0/0.0 family bridge
- B. Set interface ip-00/0/0.0 encapsulation valn-bridge
- C. Set interfaces gr—0/0/0.0 encapsulation vlan-bridge
- D. Set interface ip-0/0/0.0 family bridge

**Answer:** A

**NEW QUESTION 2**

Exhibit.

\*\*\*Exhibit is Missing\*\*\*

Which two statements are correct. (Choose two.)

- A. Route 2001:2244:3311:321:233::128 has been prepended.
- B. The active path to 2001:2244:3311:321:233::128 will exist using interface irb.433.
- C. Route 2001:2244:3311:321:233::128 will be advertised to an EBGP peer in AS 62553.
- D. The AS path shows two hops to their IBGP routers within autonomous system 62553.

**Answer:** AD

**NEW QUESTION 3**

Click the Exhibit button.

```
user@host# show
    firewall {
        family ethernet-switching {
            filter ingress-vlan-limit-guest {
                term guest-to-guest {
                    from {
                        destination-address 192.0.2.33/28;
                    }
                    then {
                        accept;
                    }
                }
                term no-guest-employee-no-peer-to-peer {
                    from {
                        destination-mac-address 00.05.5E.00.00.DF;
                    }
                    then {
                        accept;
                    }
                }
            }
        }
    }
    vlans {
        guest-vlan {
        }
    }
}
```

A recent security audit indicates that peer-to-peer applications are allowed on the guest VLAN and employees may have been using the guest VLAN for this purpose. You deploy the configuration shown in the exhibit, but it does not stop the peer-to-peer traffic. In this scenario, what must you do to implement the security policy?

- A. Implement 802.1X on the guest VLAN
- B. Attach the filter to the VLAN
- C. Deploy storm control to block unknown unicast traffic
- D. Use persistent MAC learning

**Answer:** B

**NEW QUESTION 4**

Which two statements are true about high availability on Junos devices? (Choose two.)

- A. BFD is faster at detecting failures than default GRE or OSPF timers.
- B. NSR is independent of helper routers to assist the routing platform in restoring routing protocol information.
- C. NSR is dependent on helper routers to assist the routing platform in restoring routing protocol information.
- D. BFD is slower at detecting failures than default GRE or OSPF timers.

**Answer:** AB

#### NEW QUESTION 5

Exhibit.  
family iso {  
address 49.0001.1921.6800.1001.00;  
}

Which statement is correct about the ISO NET address shown in the exhibit?

- A. The authority and format identifier (AFI) is 00.
- B. The area identifier is 0001.
- C. The system identifier is 6800.1001.00.
- D. This is not a valid NET address.

**Answer:** B

#### NEW QUESTION 6

Click the Exhibit button.

```
user@host> show route 0/0 exact detail
inet.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
0.0.0.0/0 (1 entry, 1 announced)
    *Aggregate Preference: 130
        Next hop type: Router, Next hop index: 546
        Next-hop reference count: 4
    Next hop: 172.30.25.1 via ge-0/0/1.100, selected
    State: <Active Int Ext>
    Local AS: 65400
    Age: 1:03:46
    Task: Aggregate
    Announcement bits (2): 0-KRT 2-OSPF
    AS path: I
    Flags: Generate Depth: 0 Active
    Contributing Routes (1):
    10.0.0.0/16 proto BGP
```

Referring to the output shown in the exhibit, which two statements are true?

- A. The route is active
- B. The route is not active
- C. The route is a generate route
- D. The route is an aggregate route

**Answer:** AC

#### NEW QUESTION 7

Which two situations would cause dynamic ARP inspection to drop traffic? (Choose two.)

- A. If no IP-to-MAC address entry exists in the DHCP snooping database
- B. If the IP address in the ARP packet is deemed invalid
- C. If the requested MAC address exceeds the configured limit on the port
- D. If the ARP packet comes from a port that has been configured as trusted

**Answer:** AC

#### NEW QUESTION 8

Which statement is true about IP-IP tunnels?

- A. The time-to-live value of the original packet is decremented.
- B. IP-IP tunnels are protocol agnostic.
- C. The packet is encapsulated unchanged before entering the tunnel
- D. The packet header is replaced before entering the tunnel

**Answer:** C

#### NEW QUESTION 9

Which device is used to separate collision domains?

- A. Switch
- B. Router
- C. Hub
- D. firewall

**Answer:** A

#### NEW QUESTION 10

Your network connect to the Internet Through two different ISPs using EBGP. You must ensure that ISP1 is the primary path used for all traffic entering your network while using ISP2 as a backup path.


In this scenario, which statement is correct?

- A. You should use a lower MED value on routes sent to ISP1.
- B. You should assign a higher local preference on routers that you are sending to ISP1.
- C. You should change the next hop for all routes sent to ISP2.
- D. You should your local AS number three times on routes that you are sending to ISP2.

**Answer:** D

#### NEW QUESTION 10

Exhibit.

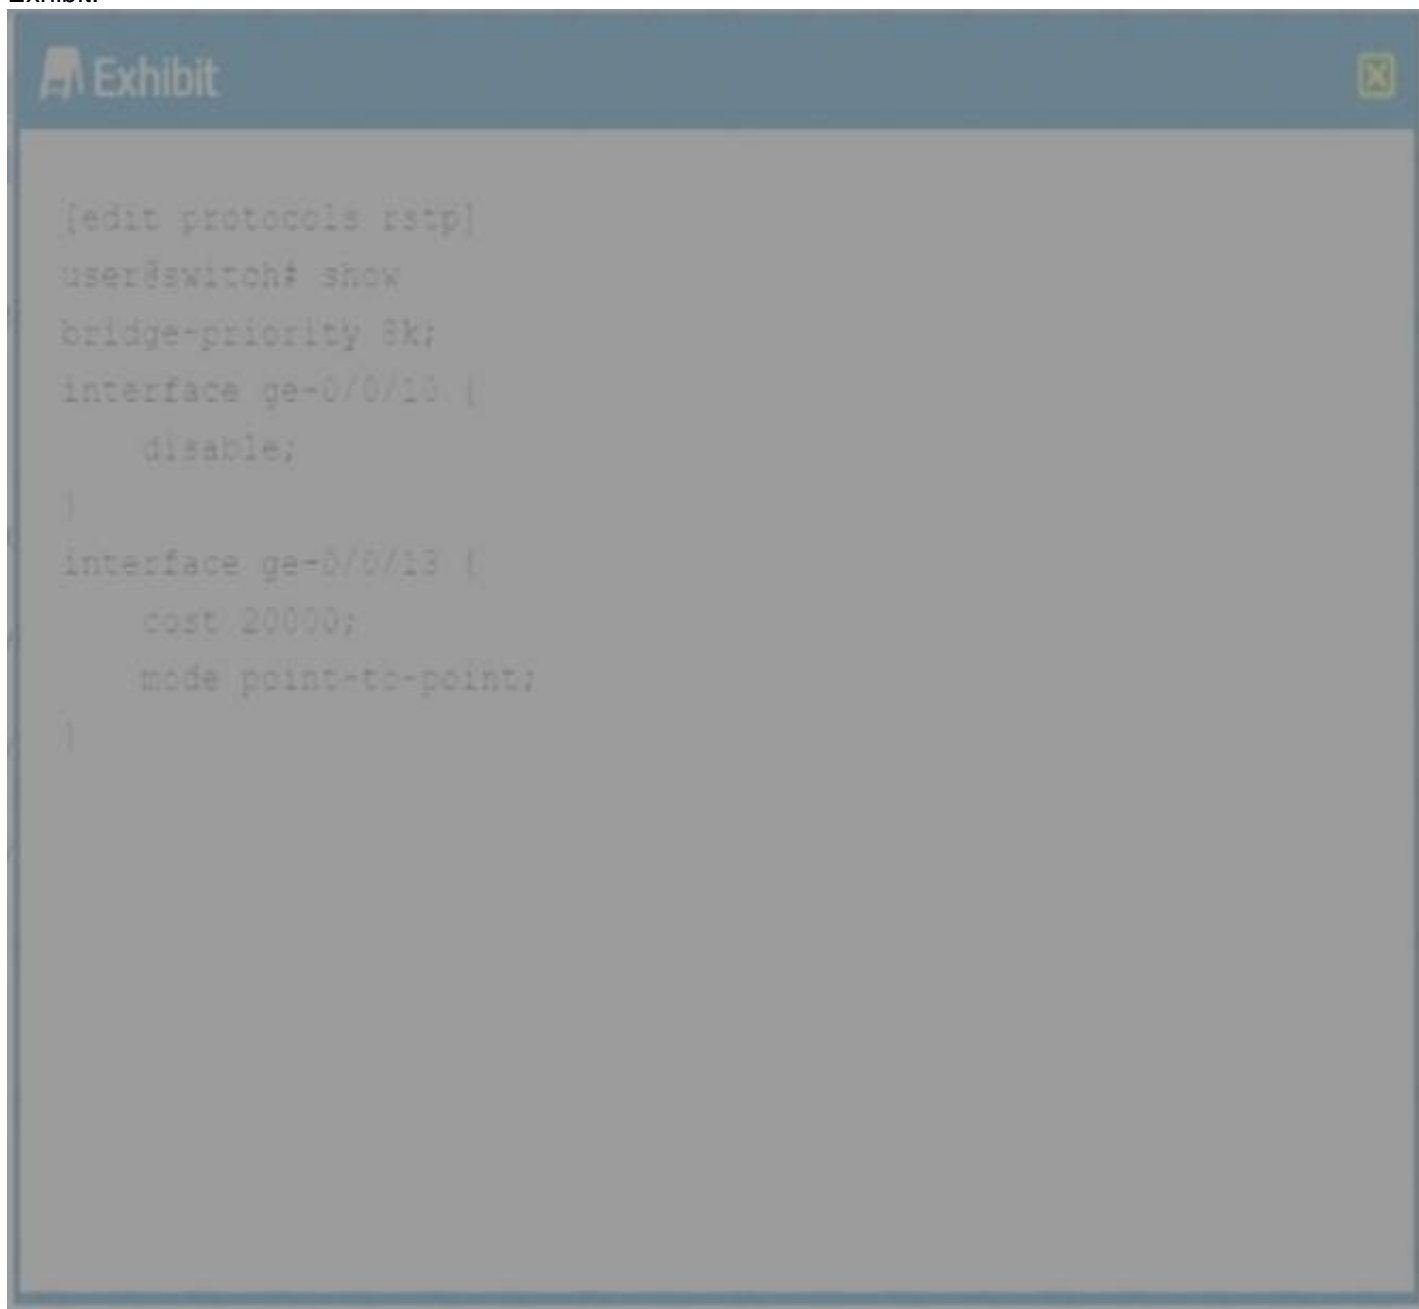

Which two statements are correct? (Choose two.)

- A. The ge-0/0/10 interface will not participate in the RSTP topology.
- B. This device must be selected as the root bridge.
- C. The ge-0/0/13 interface will be selected as the forwarding interface.
- D. The ge-0/0/10 interface will be part of the RSTP topology but will block incoming BPDUs.

**Answer:** AC

#### NEW QUESTION 14

What are two benefits of 802.3ad link aggregation? (Choose two)

- A. It increases bandwidth
- B. It ensures symmetrical paths
- C. It simplifies interface configuration.
- D. It creates physical layer redundancy.

**Answer:** AD

**NEW QUESTION 17**

Which two routers belong to the 172.16.0.0/22 aggregate route? (Choose two.)

- A. 172.16.4.0/24
- B. 172.16.0.0/24
- C. 172.16.5.0/24
- D. 172.16.3.0/24

**Answer:** BD

**NEW QUESTION 20**


What are two interarea OSPF LSA types? (Choose two.)

- A. Type 1 router LSAs
- B. Type 2 network LSAs
- C. Type 3 summary LSAs
- D. Type 4 ASBR summary LSAs

**Answer:** CD

**NEW QUESTION 25**

Exhibit.

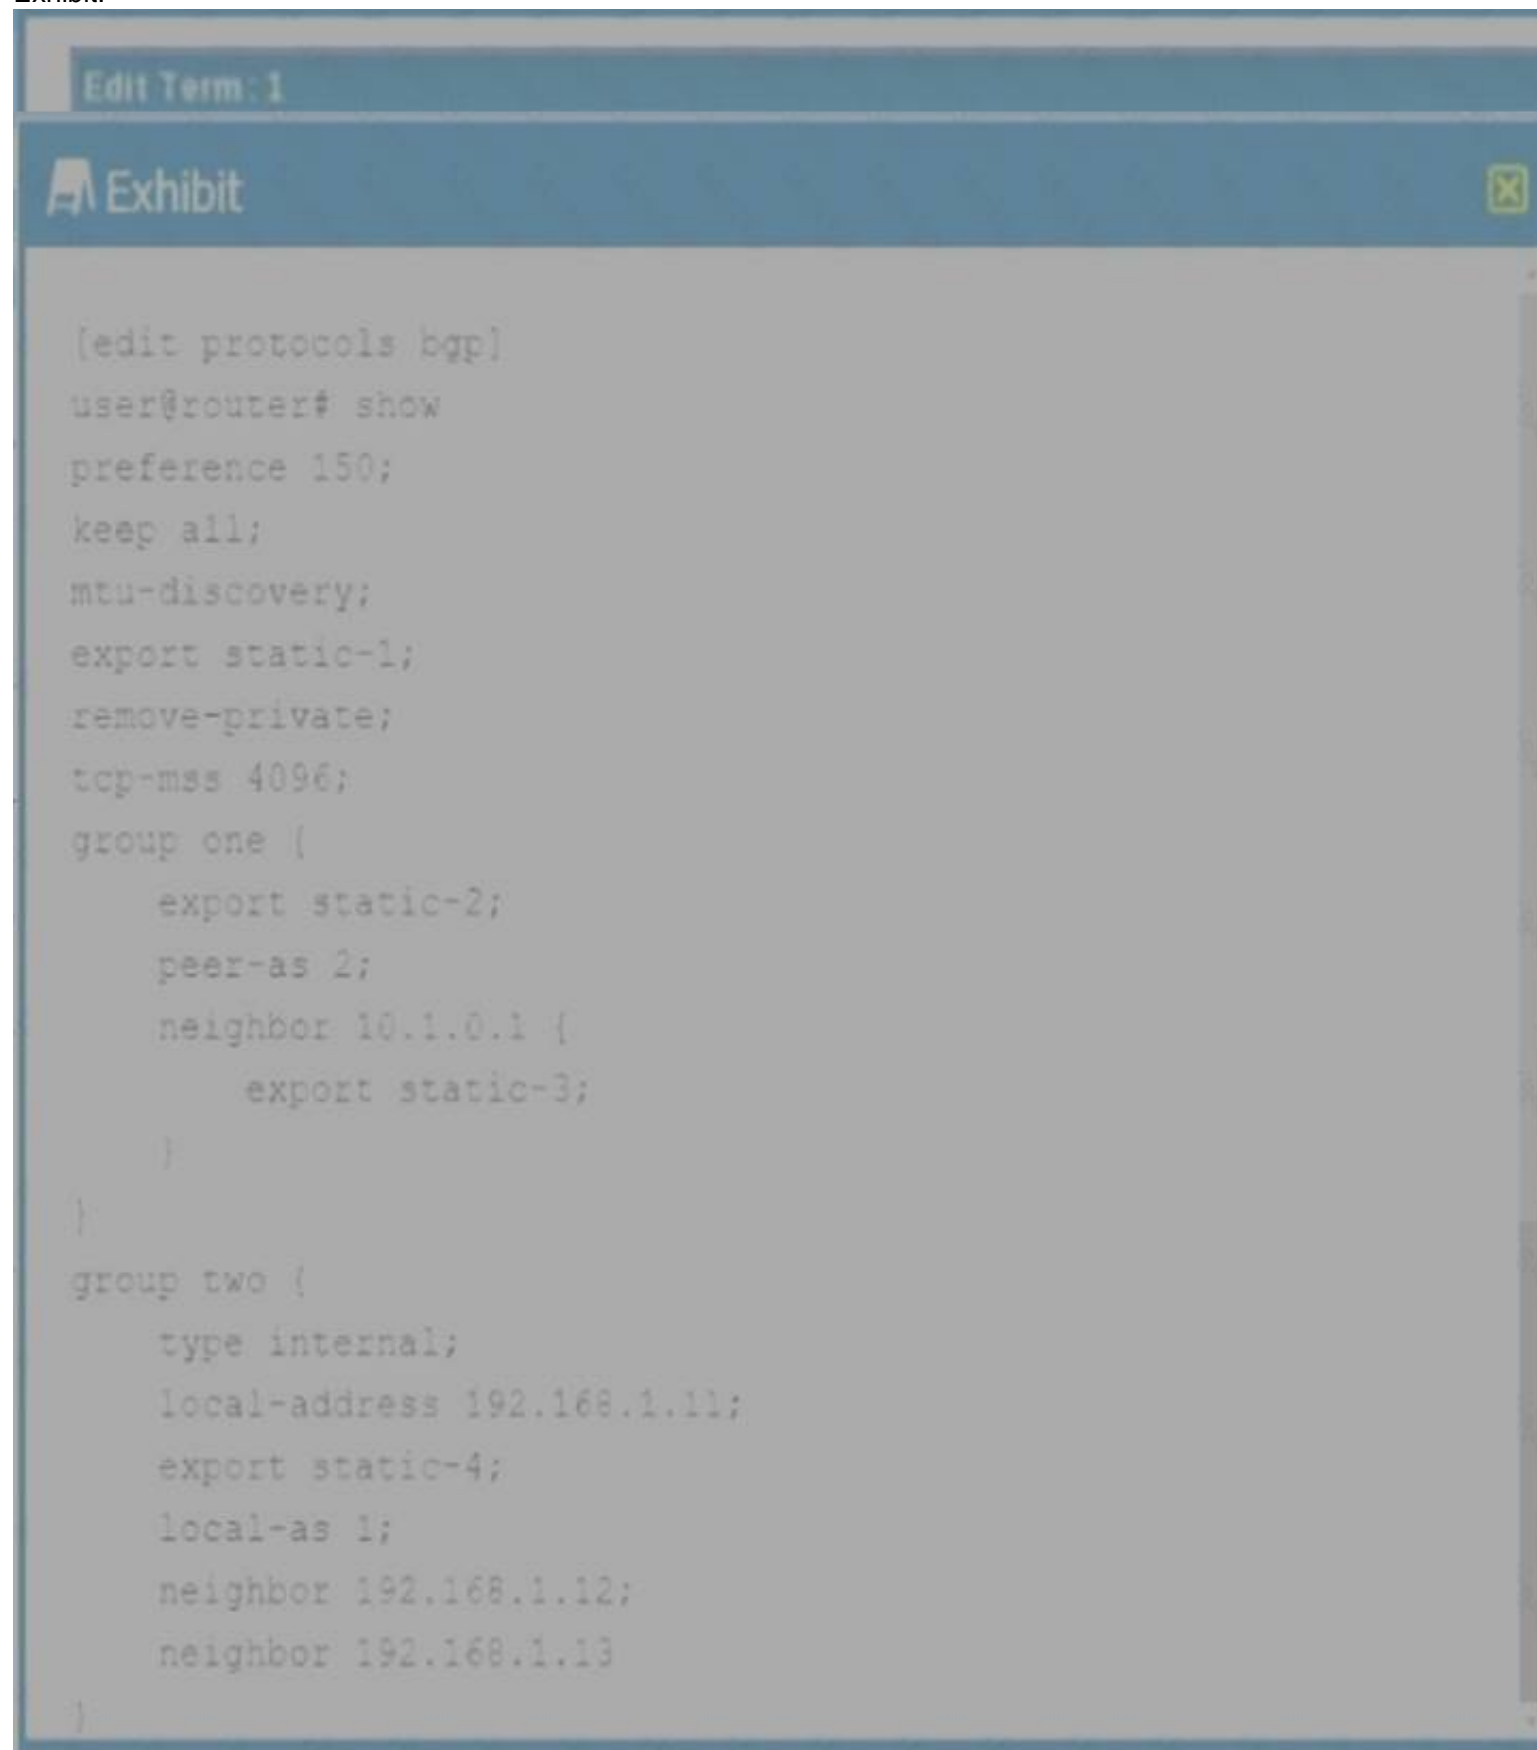

```
[edit protocols bgp]
user@router# show
preference 150;
keep all;
mtu-discovery;
export static-1;
remove-private;
tcp-mss 4096;
group one {
    export static-2;
    peer-as 2;
    neighbor 10.1.0.1 {
        export static-3;
    }
}
group two {
    type internal;
    local-address 192.168.1.11;
    export static-4;
    local-as 1;
    neighbor 192.168.1.12;
    neighbor 192.168.1.13
}
```

Referring to the exhibit, which policy will export routes to IBGP peers?

- A. static-4
- B. static-2
- C. static-1
- D. static.c-2

**Answer:** A

**NEW QUESTION 30**

Which statement is correct about 13 IS link state PDUs?

- A. They are used to maintain link slid.: database synchronization
- B. They are used to establish adjacencies
- C. They are used to build the link state database.
- D. They are used to determine whether the neighbors are Level 1 or Level 2

**Answer:** C

**NEW QUESTION 31**

How many bytes of overhead are added to packet traversing a GRE tunnel?

- A. 20
- B. 24
- C. 12
- D. 16

**Answer:** B

**NEW QUESTION 35**

You have a conference room with an open network port that is used by employees to connect to the network. You are concerned about rogue switches being connected to this port

Which two features should you enable on your switch to limit access to this port? (Choose two.)

- A. DHCP snooping
- B. dynamic ARP inspection
- C. MAC limiting
- D. 802.1X

**Answer:** AB

**NEW QUESTION 38**

Which OSPF packet type is sent when an OSPF router detects its database is state?


- A. Database description
- B. Hello
- C. Link-state acknowledgment
- D. Link-state request

**Answer:** D

**NEW QUESTION 43**

Exhibit.



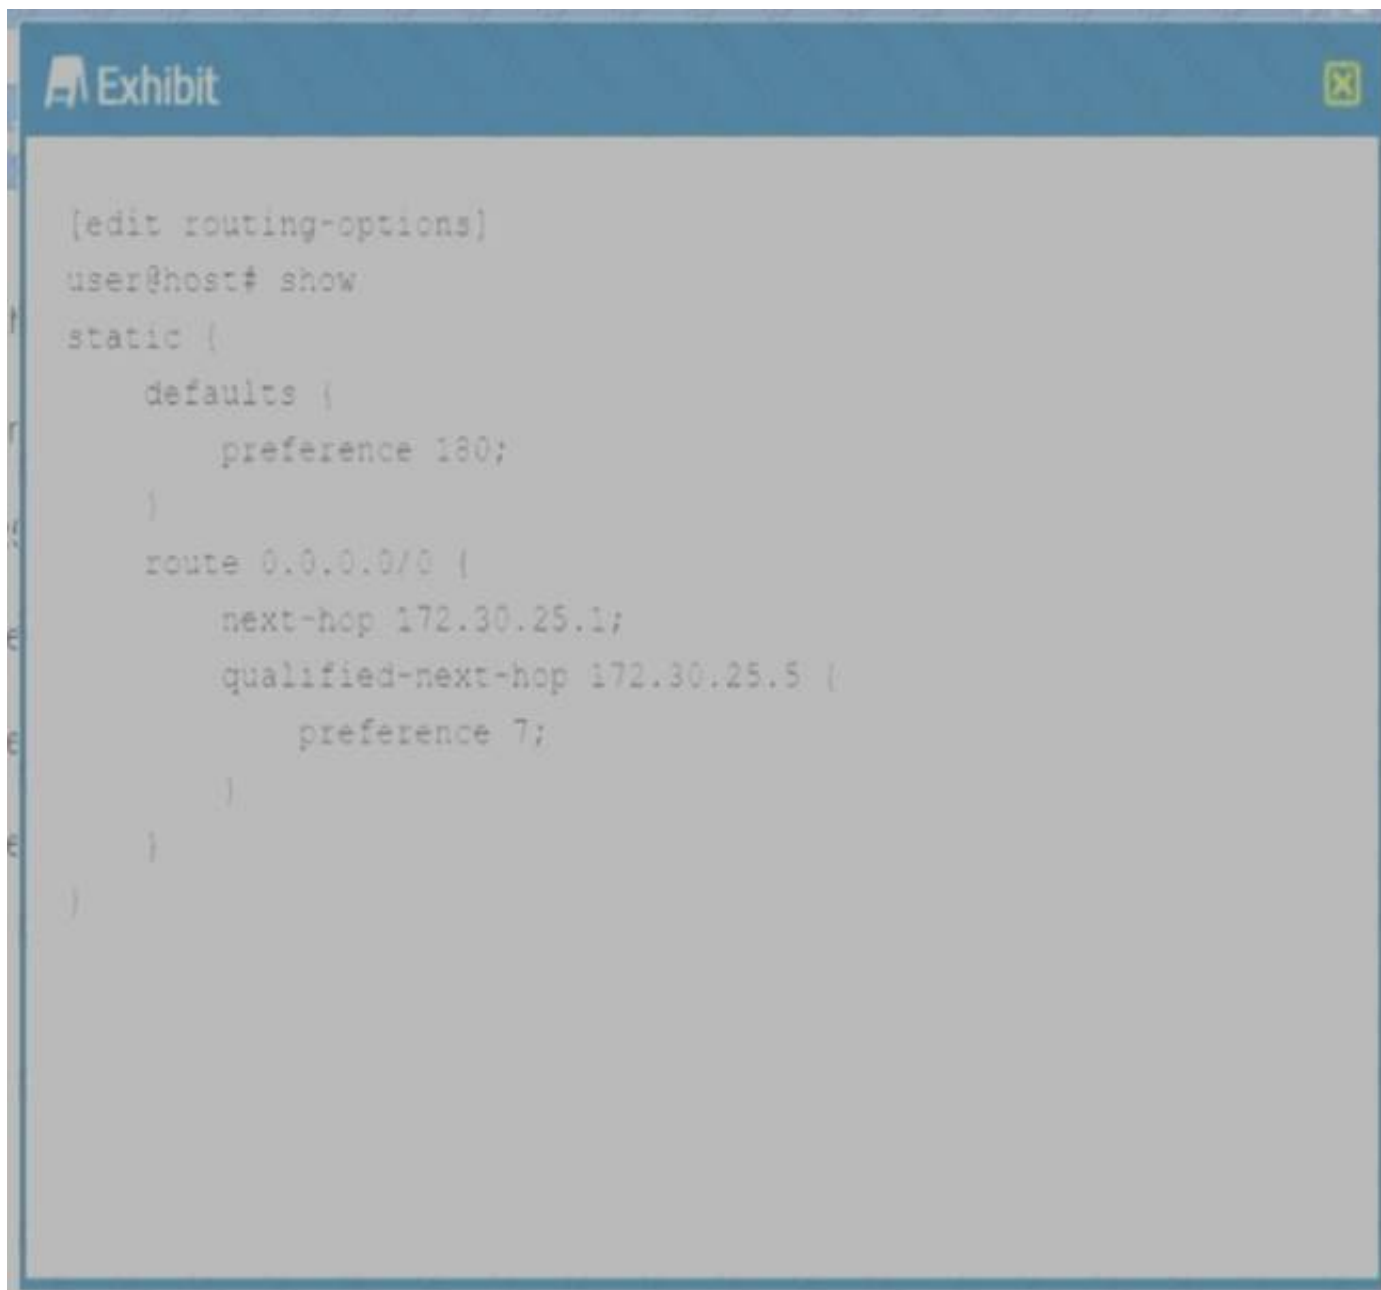

Which statement is true about the configuration shown in the exhibit?

- A. The preferred next hop is 172.30.25.5.
- B. The preference for the 172.30.25.5.1 next hop is 7.
- C. The preference for the 172.30.25.1 next hop is 5.
- D. 172.30.25.5.1 is the preference next hop.

**Answer:** A

#### NEW QUESTION 45

You need to a new ESXi host connected to port ge-0/0/1. One of the VMs configured with VLAN 10 is not reachable from any other device on the switch. To troubleshoot, you decide to verify of the VMs MAC address is learned properly under VLAN 10. Which command would you use in this scenario?

- A. Show Ethernet-switching table vlan-id 10
- B. Show interfaces ge-0/0/1 detail
- C. Show vlans 10
- D. Monitor interface ge-0/0/1

**Answer:** A

#### NEW QUESTION 48


Which static route next-hop value indicates that the packet will be silently dropped?

- A. Resolve
- B. Discard
- C. Reject
- D. Next-table

**Answer:** B

#### NEW QUESTION 52

Click the Exhibit button.

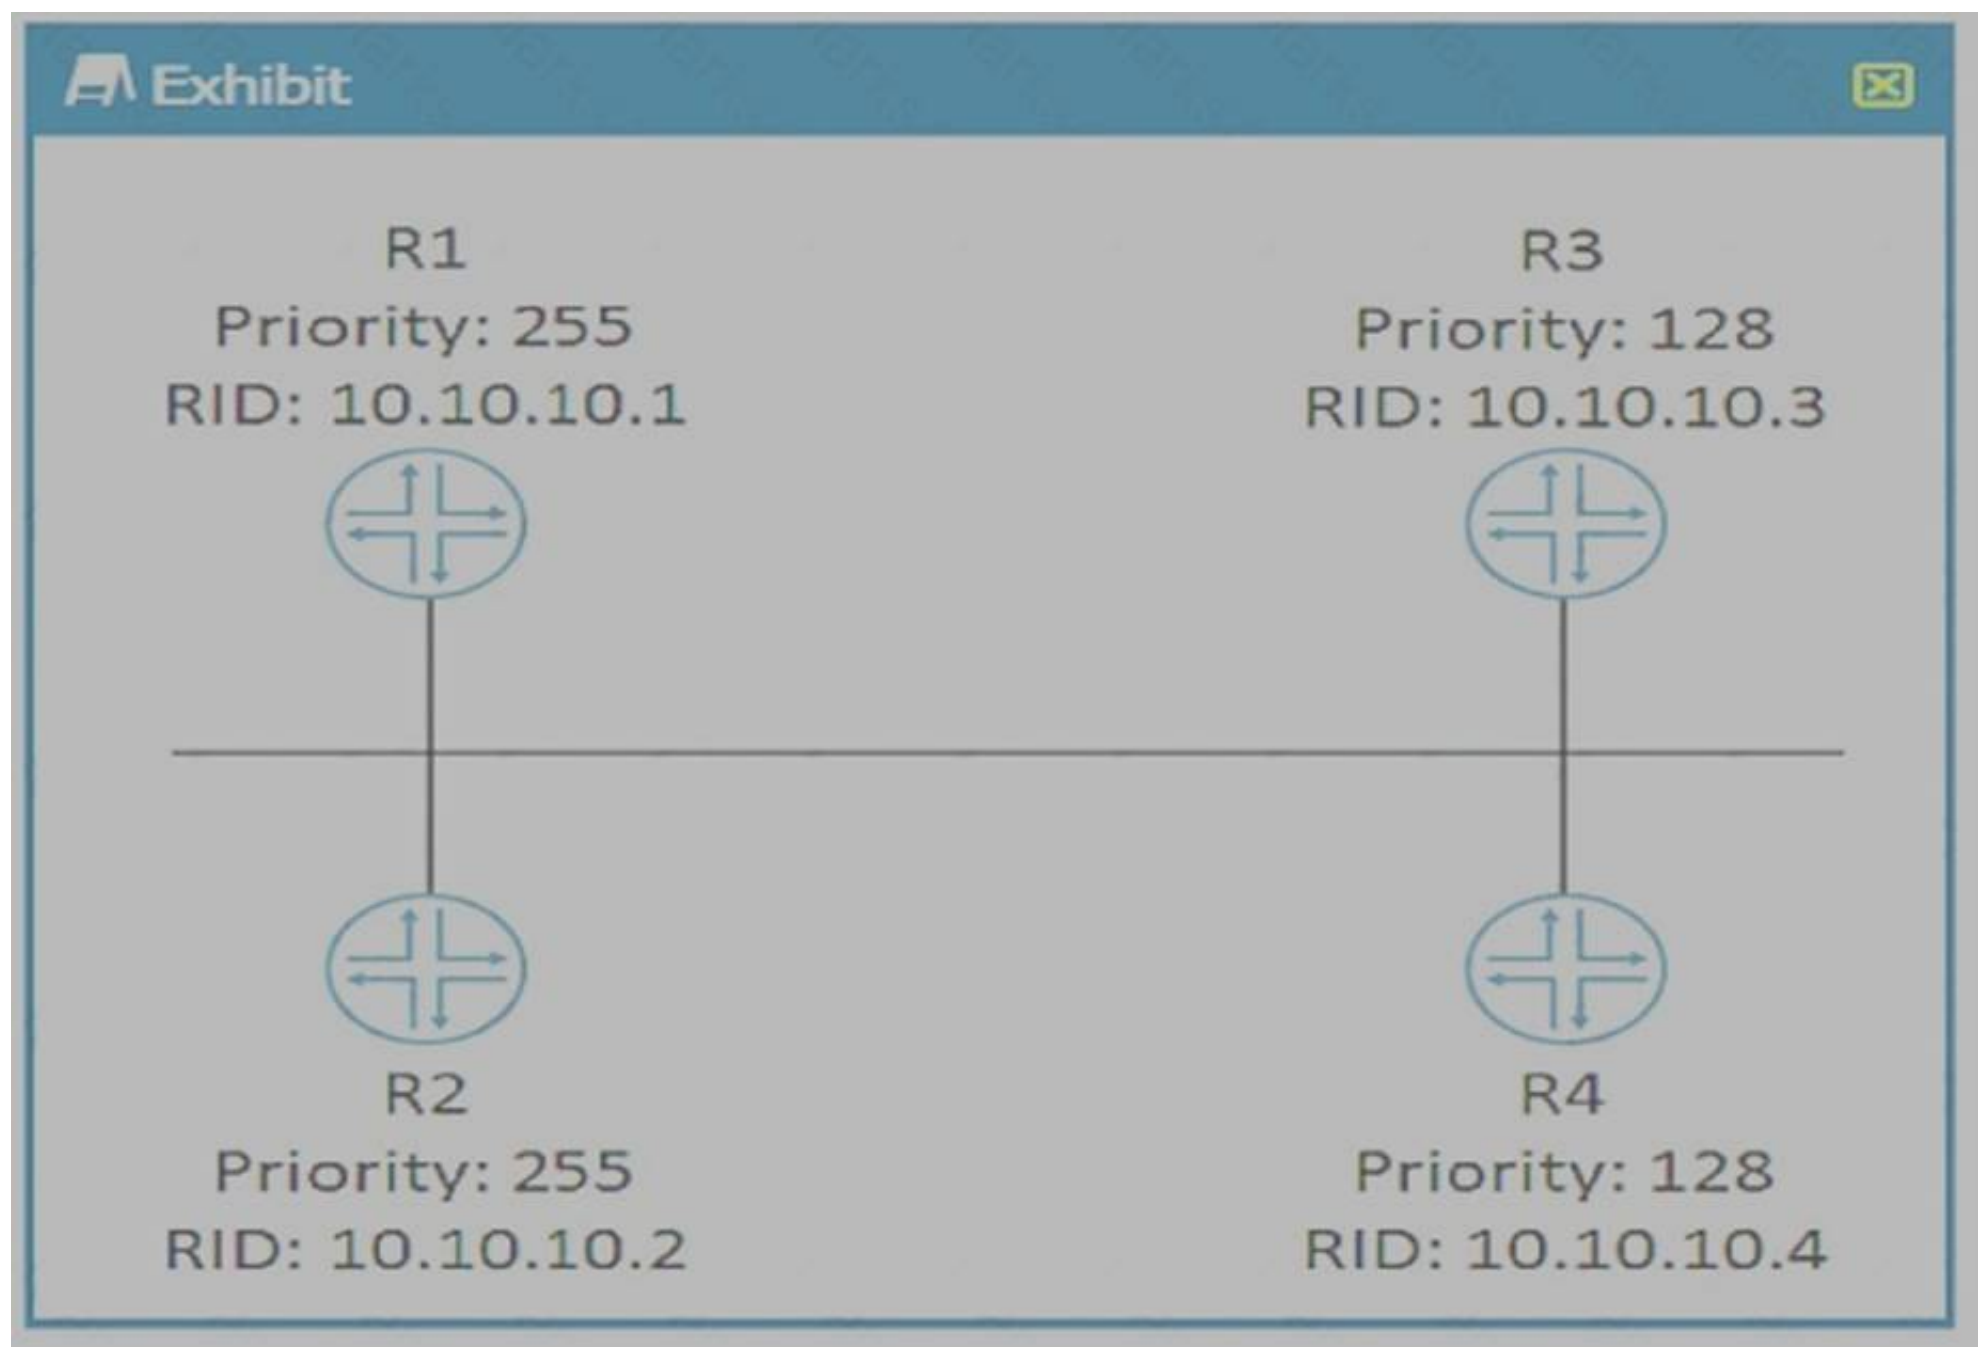

Referring to the exhibit, which router becomes the OSPF DR when all routers are powered on at the same time?

- A. R3
- B. R4
- C. R1
- D. R2

**Answer: D**

#### NEW QUESTION 53

Which protocol prevents loops and calculates the best path through a switched network that contains redundant paths?

- A. VRRP
- B. STP
- C. DHCP
- D. IS-IS

**Answer: B**

#### NEW QUESTION 57

You must implement filter-based forwarding. You need to direct traffic from 192.168.1.0/24 through vr1 and traffic from 10.210.0.128/26 through vr2. Which configuration is correct in this scenario?

- A. firewall { family inet { filter fbf-filter1 { term match-192-subnet { from { source-address { 192.168.1.0/26; } } then { routing-instance vr2; } } term match-10-subnet { from { source-address { 10.210.0.128/26; } } then { routing-instance vr1; } } } } }
- B. firewall { family inet { filter fbf-filter1 { term match-192-subnet { from { source-address { 192.168.0.0/24; } } then { routing-instance vr1; } } term match-10-subnet { from { source-address { 10.210.0.128/27; } } then { routing-instance vr2; } } } } }
- C. firewall { family inet { filter fbf-filter1 { term match-192-subnet { from { source-address { 192.168.2.0/26; } } then { routing-instance vr2; } } term match-10-subnet { from { source-address { 10.210.1.128/26; } } then { routing-instance vr1; } } } } }
- D. firewall { family inet { filter fbf-filter1 { term match-192-subnet { from { source-address { 192.168.1.0/24; } } then { routing-instance vr1; } } term match-10-subnet { from { source-address { 10.210.0.128/26; } } then { routing-instance vr2; } } } } }

**Answer: D**

#### NEW QUESTION 61

Which statement is true about IP-IP tunnels?

- A. Intermediate devices must have a route to the destination address of the traffic being tunneled.
- B. Intermediate devices must have a route to both the tunnel source address and the tunnel destination address.
- C. Intermediate devices must have a route to the tunnel destination address but do not require a route to the tunnel source address.
- D. Intermediate devices must have a route to the tunnel source address but do not require a route to the tunnel destination address



**Answer:** B

**NEW QUESTION 63**


When configuring firewall filters, which function does the interface-specific parameter enable on an EX Series switch?

- A. The interface-specific parameter is required to configure port-specific counters.
- B. The interface-specific parameter is required to configure VLAN-specific counters.
- C. The interface-specific parameter is required to configured VLAN-based filters.
- D. The interface-specific parameter is required to configured port-based firewall filters.

**Answer:** A

**NEW QUESTION 67**

Exhibit.

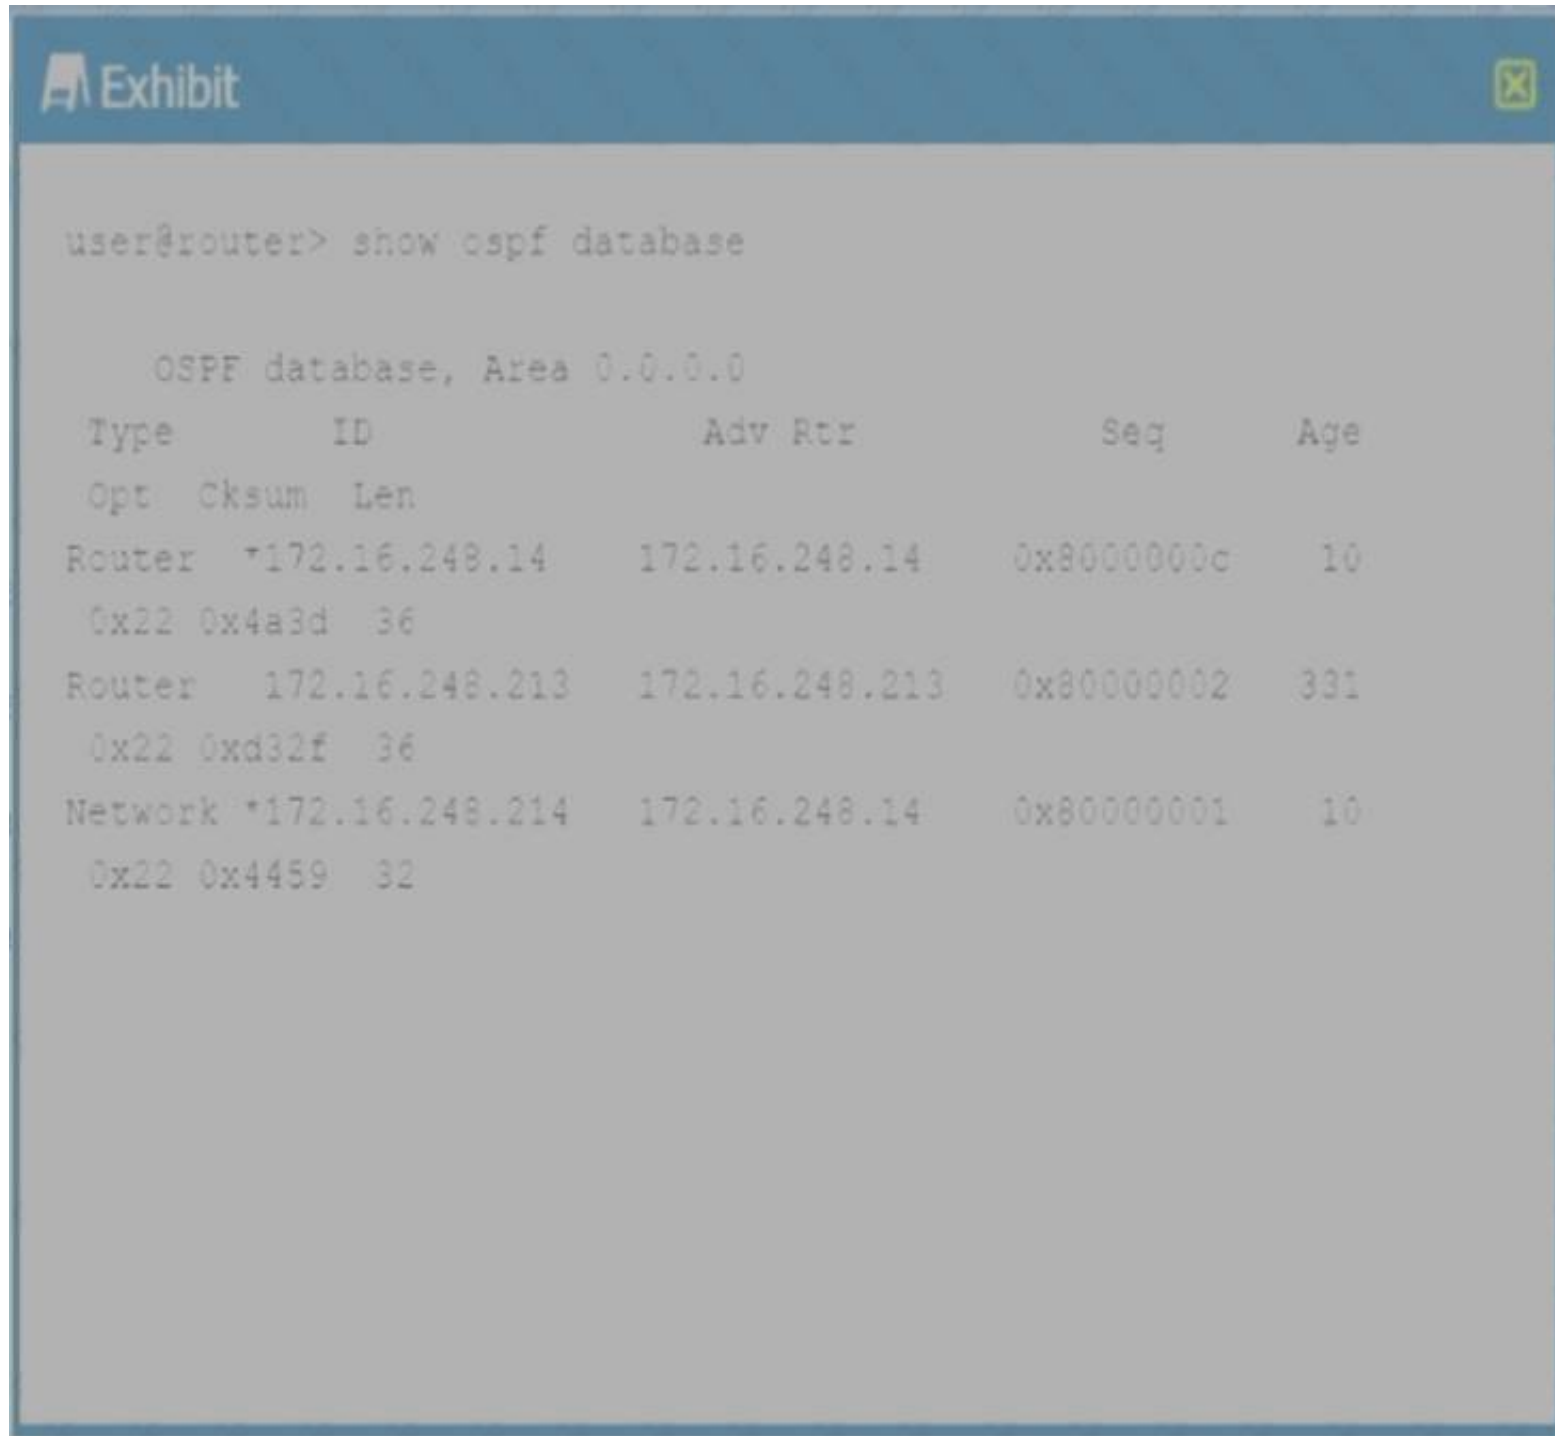

Referring to the exhibit, what do the asterisks (\*) indicate?

- A. The entries are new.
- B. The router receive the entries.
- C. The entries are state.
- D. The router originated the entries.

**Answer:** D

**NEW QUESTION 69**

Which three mechanisms are associated with the bridging process? (Choose three.)

- A. blocking
- B. flooding
- C. aging
- D. filtering
- E. listening

**Answer:** BCD

**NEW QUESTION 73**

What are two characteristics of OSPF ABRs? (Choose two.)

- A. ABRs transmit routing information between the backbone and other areas.
- B. ABRs cannot be part of the backbone and another area at the same time.
- C. ABRs inject information from outside the OSPF domain.
- D. ABRs link two OSPF areas

**Answer:** AD

#### NEW QUESTION 75

Click the Exhibit button.

```
user@router> show bgp neighbor 192.168.200.2
Peer: 192.168.200.2+179 AS 11685 Local: 192.168.200.1+49469 AS 7029
  Type: External      State: Established      Flags: <ImportEval Sync>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference AddressFamily PeerAS LocalAS Rib-group Refresh>
  Address families configured: inet-unicast inet-vpn-unicast l2vpn-signaling
  Holdtime: 90 Preference: 170 Local AS: 7029 Local System AS: 0
  Number of flaps: 0
  Peer ID: 10.8.241.31      Local ID: 10.8.241.30      Active Holdtime: 90
  Keepalive Interval:30      Group index: 0      Peer index: 0
  BFD: disabled, down
  Local Interface: xe-0/2/3.0
  NLRI for restart configured on peer: inet-unicast inet-vpn-unicast l2vpn
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 11685)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:          0
    Received prefixes:        0
    Accepted prefixes:        0
    Suppressed due to damping: 0
    Advertised prefixes:      0
  Last traffic (seconds): Received 17 Sent 17 Checked 17
  Input messages: Total 2 Updates 1 Refreshes 0 Octets 42
  Output messages: Total 3 Updates 0 Refreshes 0 Octets 136
  Output Queue[0]: 0
```

Your router is configured to peer with your ISP's router using BGP. You can only control your BGP configuration. Which address families are negotiated between the two BGP peers shown in the exhibit?

- A. inet-unicast inet-vpn-unicast l2vpn-signaling
- B. inet-unicast
- C. inet-vpn-unicast
- D. inet-unicast inet-vpn-unicast l2vpn

**Answer:** B

#### NEW QUESTION 80

Which area is reserved for the OSPF backbone?

- A. Area 0.0.0.0
- B. Area 1.1.1.1
- C. Area 2.2.2.2
- D. Area .3.3.3.3

**Answer:** A

#### NEW QUESTION 82

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your JN0-348 Exam with Our Prep Materials Via below:**

<https://www.certleader.com/JN0-348-dumps.html>