

Exam Questions OmniStudio-Developer

Salesforce Certified OmniStudio Developer (SU21)

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>



NEW QUESTION 1

A developer need to use the CONTIF function to process data entered by the user in an OmniScript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, what element should the developer use this function in?

- A. A Calculation Action element
- B. A Set Values element
- C. A formula element
- D. A Range element

Answer: C

NEW QUESTION 2

Why would a developer clone an Integration Procedure instead of versioning it?

- A. The new Integration Procedure uses a Cache Block.
- B. The new Integration Procedure it replacing stub data.
- C. The new Integration Procedure will be used independently
- D. The new Integration Procedure is Chainable.

Answer: C

NEW QUESTION 3

A developer is configuring a DataRaptor Load to Save contract data. The developer needs to set the record type of the contact using DeveloperName. Which two configuration actions should the developer take to set this up in the DataRaptor Load?

- A. Check is Lookup property when mapping the fields.
- B. Add Link to RecordType object in the Contact Object with the id field of RecordType object.
- C. Select RecordType in the Lookup object list
- D. Development in the lookup Field list, and ID in the Lookup Requested Field list.
- E. Select RecordType in the Lookup Object list
- F. ID in the Lookup Field list, and Development in the Lookup requested Field list.

Answer: AC

NEW QUESTION 4

A developer needs to build a DataRaptor Transform to send current weather to both an OmniScript Card Layout. Which of these samples would be valid for the Expected Output JSON?

A)

```
{
  "Current:TempF": 53.1,
  "Current:citystate": "Baltimore, MD",
  "Current:TempF": 14.6
}
```

B)

```
{
  "Current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```

C)

```
<root>
  <Current>
    <TempF>53.1</TempF>
    <CityState>Baltimore, MD</CityState>
    <TempC>14.6</TempC>
  </Current>
</root>
```

D)

```
{
  "Current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```

- A. Option A
- B. Option B

- C. Option C
- D. Option D

Answer: D

NEW QUESTION 5

A developer needs to limit the of a DataRaptor Extract to a maximum of one result. How should the developer configure this?

- A. Define a formula with the Filter function
- B. Use a Custom Output Type when creating the DataRaptor
- C. Use the LIMIT filter on the Extract definition
- D. Set the Limit Property on the Action that calls the DataRaptor Extract.

Answer: C

NEW QUESTION 6

An integration Procedure uses an HTTP action to make a REST API call. The response from the REST API must be converted into a specific XML structure before sending it as an input to another external web service.

How should the developer configure the Integration Procedure to meet this requirement?

- A. Use a Remote Action that calls the XMLStreamReader class
- B. Use a Remote Action that calls the XMLStreamWriter class
- C. Use a DataRaptor Transform to convert JSON to XML
- D. Use a DataRaptor Extract and check the XML checkbox on the Output JSON Path.

Answer: C

NEW QUESTION 7

A developer creates a Flexcard that displays a contact's mailing address and passes the contact's postal code to a child FlexCard. When configuration text elements in the child FlexCard, what syntax should a developer use to refer to the contact's postal code?

- A. {Postalcode}
- B. {Parent.postalcode}
- C. {Records.postalcode}
- D. {Params.postalcode}

Answer: D

NEW QUESTION 8


A developer is troubleshooting an Integration Procedure with two elements: A Remote Action named FetchCart and a Response Action named ResponseCart. In Preview, what JSON node shows the data sent to the Response Action?

- A. FetchCart
- B. Response
- C. ResponseCartDebug
- D. ResponseCart

Answer: C

NEW QUESTION 9

Refer to the exhibit.

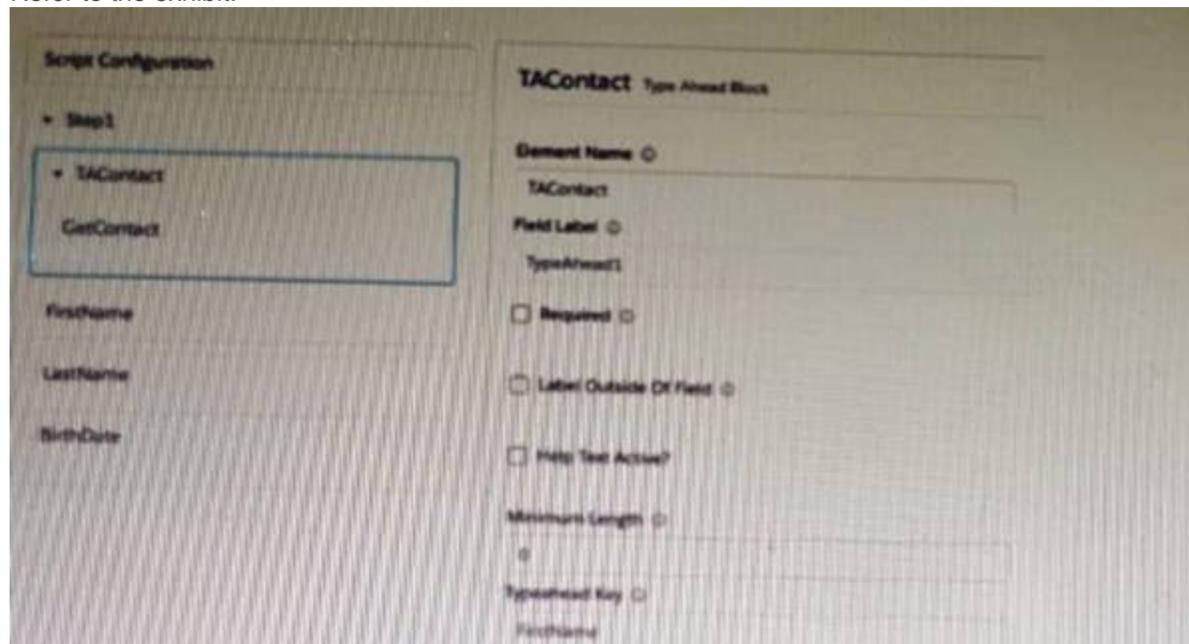

A developer creates an OmniScript display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The DataRaptor used in the Type Ahead has been tested and fetches the correct data.

When previewing Omniscript, the developer enters a name in the TypeAhead and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

What is the reason that the fields fail to display the fetched data?

- A. Lookup Mode is not selected in the properties of the Type A Head Block.

- B. Use Data JSON is not selected in the properties of the Type Ahead Block.
- C. FirstName, LastName, and BirthDate are not placed inside the Type ahead Block.
- D. The Typeahead ley is not in the correct format

Answer: C

NEW QUESTION 10

A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions, which are represented by more than 20 different FlexCards.

What is the most efficient way for the developer to configure the action that invokes the OmniScript?

- A. As an OS Action
- B. As a Custom Action
- C. As an OmniStudio Action
- D. As a Lightning Action

Answer: C

NEW QUESTION 10

What two advantages does a DataRaptor Turbo Extract have over a standard DataRaptor Extract? Choose 2 answers

- A. It populates data in PDF and DocuSign format
- B. It is easier to configure
- C. It has better performance at runtime
- D. It supports complex field mappings

Answer: BC

NEW QUESTION 15

A developer creates a DataRaptor Extract to retrieve data to pass to an external service. The external service expects the field value to be integer. However, the DataRaptor is sending it as a string.

Which action can the developer take to fix this?

- A. In the DataRaptor Output tab, select the Output Data Type of that field to Integer.
- B. In the DataRaptor Output tab, enter the default value as 0 on the field.
- C. In the DataRaptor Extract tab, set the Input Data Type field to Integer.
- D. In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use the formula as output.

Answer: A

NEW QUESTION 19

The OmniScript must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.


Which two OmniScript elements should the developer use to configure this functionality?

- A. DataRaptor Extract Action
- B. REST API Action
- C. Navigation Action
- D. SOQL Action
- E. HTTP Action

Answer: AE

NEW QUESTION 21

Refer to the exhibit below.

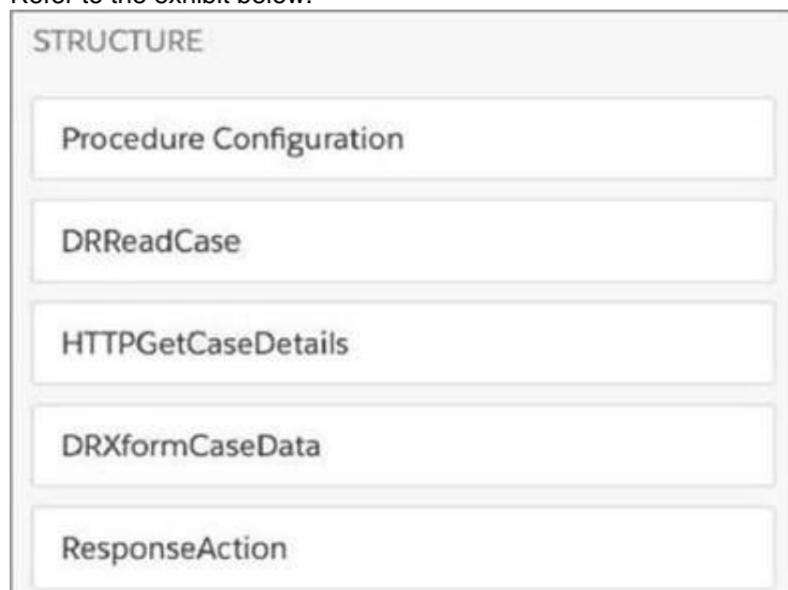

What is the merge code needed for this integration procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP URL?

- A. %DRReadCase: CaseNumber%
- B. ((DRRCase,CaseNumber))
- C. MTTOPDetCaseDetail: CaseNumber%
- D. ((CaseNumber))

Answer: A

NEW QUESTION 22

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual OmniStudio-Developer Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the OmniStudio-Developer Product From:

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>

Money Back Guarantee

OmniStudio-Developer Practice Exam Features:

- * OmniStudio-Developer Questions and Answers Updated Frequently
- * OmniStudio-Developer Practice Questions Verified by Expert Senior Certified Staff
- * OmniStudio-Developer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * OmniStudio-Developer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year