

Associate-Cloud-Engineer Dumps

Google Cloud Certified - Associate Cloud Engineer

<https://www.certleader.com/Associate-Cloud-Engineer-dumps.html>



NEW QUESTION 1

Your company runs one batch process in an on-premises server that takes around 30 hours to complete. The task runs monthly, can be performed offline, and must be restarted if interrupted. You want to migrate this workload to the cloud while minimizing cost. What should you do?

- A. Migrate the workload to a Compute Engine Preemptible VM.
- B. Migrate the workload to a Google Kubernetes Engine cluster with Preemptible nodes.
- C. Migrate the workload to a Compute Engine V
- D. Start and stop the instance as needed.
- E. Create an Instance Template with Preemptible VMs O
- F. Create a Managed Instance Group from the template and adjust Target CPU Utilizatio
- G. Migrate the workload.

Answer: B

NEW QUESTION 2

Your company has workloads running on Compute Engine and on-premises. The Google Cloud Virtual Private Cloud (VPC) is connected to your WAN over a Virtual Private Network (VPN). You need to deploy a new Compute Engine instance and ensure that no public Internet traffic can be routed to it. What should you do?

- A. Create the instance without a public IP address.
- B. Create the instance with Private Google Access enabled.
- C. Create a deny-all egress firewall rule on the VPC network.
- D. Create a route on the VPC to route all traffic to the instance over the VPN tunnel.

Answer: B

Explanation:

Get private access to Google services, such as storage, big data, analytics, or machine learning, without having to give your service a public IP address.

Reference: <https://cloud.google.com/vpc>

NEW QUESTION 3

You have just created a new project which will be used to deploy a globally distributed application. You will use Cloud Spanner for data storage. You want to create a Cloud Spanner instance. You want to perform the first step in preparation of creating the instance. What should you do?

- A. Grant yourself the IAM role of Cloud Spanner Admin
- B. Create a new VPC network with subnetworks in all desired regions
- C. Configure your Cloud Spanner instance to be multi-regional
- D. Enable the Cloud Spanner API

Answer: C

NEW QUESTION 4

You want to configure a solution for archiving data in a Cloud Storage bucket. The solution must be cost-effective. Data with multiple versions should be archived after 30 days. Previous versions are accessed once a month for reporting. This archive data is also occasionally updated at month-end. What should you do?

- A. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Coldline Storage.
- B. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Nearline Storage.
- C. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Coldline Storage.
- D. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Nearline Storage.

Answer: B

NEW QUESTION 5

You are analyzing Google Cloud Platform service costs from three separate projects. You want to use this information to create service cost estimates by service type, daily and monthly, for the next six months using standard query syntax. What should you do?

- A. Export your bill to a Cloud Storage bucket, and then import into Cloud Bigtable for analysis.
- B. Export your bill to a Cloud Storage bucket, and then import into Google Sheets for analysis.
- C. Export your transactions to a local file, and perform analysis with a desktop tool.
- D. Export your bill to a BigQuery dataset, and then write time window-based SQL queries for analysis.

Answer: D

NEW QUESTION 6

You are hosting an application from Compute Engine virtual machines (VMs) in us-central1-a. You want to adjust your design to support the failure of a single Compute Engine zone, eliminate downtime, and minimize cost. What should you do?

- A. – Create Compute Engine resources in us-central1-b.–Balance the load across both us-central1-a and us-central1-b.
- B. – Create a Managed Instance Group and specify us-central1-a as the zone.–Configure the Health Check with a short Health Interval.
- C. – Create an HTTP(S) Load Balancer.–Create one or more global forwarding rules to direct traffic to your VMs.
- D. – Perform regular backups of your application.–Create a Cloud Monitoring Alert and be notified if your application becomes unavailable.–Restore from backups when notified.

Answer: C

NEW QUESTION 7

You have a single binary application that you want to run on Google Cloud Platform. You decided to automatically scale the application based on underlying infrastructure CPU usage. Your organizational policies require you to use virtual machines directly. You need to ensure that the application scaling is operationally efficient and completed as quickly as possible. What should you do?

- A. Create a Google Kubernetes Engine cluster, and use horizontal pod autoscaling to scale the application.
- B. Create an instance template, and use the template in a managed instance group with autoscaling configured.
- C. Create an instance template, and use the template in a managed instance group that scales up and down based on the time of day.
- D. Use a set of third-party tools to build automation around scaling the application up and down, based on Stackdriver CPU usage monitoring.

Answer: A

NEW QUESTION 8

Your projects incurred more costs than you expected last month. Your research reveals that a development GKE container emitted a huge number of logs, which resulted in higher costs. You want to disable the logs quickly using the minimum number of steps. What should you do?

- A. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE container resource.
- B. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE Cluster Operations resource.
- C. 1. Go to the GKE console, and delete existing clusters.2. Recreate a new cluster.3. Clear the option to enable legacy Stackdriver Logging.
- D. 1. Go to the GKE console, and delete existing clusters.2. Recreate a new cluster.3. Clear the option to enable legacy Stackdriver Monitoring.

Answer: A

NEW QUESTION 9

You need to set up permissions for a set of Compute Engine instances to enable them to write data into a particular Cloud Storage bucket. You want to follow Google-recommended practices. What should you do?

- A. Create a service account with an access scop
- B. Use the access scope 'https://www.googleapis.com/auth/devstorage.write_only'.
- C. Create a service account with an access scop
- D. Use the access scope 'https://www.googleapis.com/auth/cloud-platform'.
- E. Create a service account and add it to the IAM role 'storage.objectCreator' for that bucket.
- F. Create a service account and add it to the IAM role 'storage.objectAdmin' for that bucket.

Answer: B

NEW QUESTION 10

Your company has an existing GCP organization with hundreds of projects and a billing account. Your company recently acquired another company that also has hundreds of projects and its own billing account. You would like to consolidate all GCP costs of both GCP organizations onto a single invoice. You would like to consolidate all costs as of tomorrow. What should you do?

- A. Link the acquired company's projects to your company's billing account.
- B. Configure the acquired company's billing account and your company's billing account to export the billing data into the same BigQuery dataset.
- C. Migrate the acquired company's projects into your company's GCP organizatio
- D. Link the migrated projects to your company's billing account.
- E. Create a new GCP organization and a new billing accoun
- F. Migrate the acquired company's projects and your company's projects into the new GCP organization and link the projects to the new billing account.

Answer: D

NEW QUESTION 10

You have one GCP account running in your default region and zone and another account running in a non-default region and zone. You want to start a new Compute Engine instance in these two Google Cloud Platform accounts using the command line interface. What should you do?

- A. Create two configurations using gcloud config configurations create [NAME]. Run gcloud config configurations activate [NAME] to switch between accounts when running the commands to start the Compute Engine instances.
- B. Create two configurations using gcloud config configurations create [NAME]. Run gcloud configurations list to start the Compute Engine instances.
- C. Activate two configurations using gcloud configurations activate [NAME]. Run gcloud config list to start the Compute Engine instances.
- D. Activate two configurations using gcloud configurations activate [NAME]. Run gcloud configurations list to start the Compute Engine instances.

Answer: C

NEW QUESTION 12

Your company uses BigQuery for data warehousing. Over time, many different business units in your company have created 1000+ datasets across hundreds of projects. Your CIO wants you to examine all datasets to find tables that contain an employee_ssn column. You want to minimize effort in performing this task. What should you do?

- A. Go to Data Catalog and search for employee_ssn in the search box.
- B. Write a shell script that uses the bq command line tool to loop through all the projects in your organization.
- C. Write a script that loops through all the projects in your organization and runs a query on INFORMATION_SCHEMA.COLUMNS view to find the employee_ssn column.
- D. Write a Cloud Dataflow job that loops through all the projects in your organization and runs a query on INFORMATION_SCHEMA.COLUMNS view to find employee_ssn column.

Answer: D

NEW QUESTION 13

You built an application on your development laptop that uses Google Cloud services. Your application uses Application Default Credentials for authentication and works fine on your development laptop. You want to migrate this application to a Compute Engine virtual machine (VM) and set up authentication using Google-recommended practices and minimal changes. What should you do?

- A. Assign appropriate access for Google services to the service account used by the Compute Engine VM.
- B. Create a service account with appropriate access for Google services, and configure the application to use this account.
- C. Store credentials for service accounts with appropriate access for Google services in a config file, and deploy this config file with your application.
- D. Store credentials for your user account with appropriate access for Google services in a config file, and deploy this config file with your application.

Answer: B

NEW QUESTION 16

You have an object in a Cloud Storage bucket that you want to share with an external company. The object contains sensitive data. You want access to the content to be removed after four hours. The external company does not have a Google account to which you can grant specific user-based access privileges. You want to use the most secure method that requires the fewest steps. What should you do?

- A. Create a signed URL with a four-hour expiration and share the URL with the company.
- B. Set object access to 'public' and use object lifecycle management to remove the object after four hours.
- C. Configure the storage bucket as a static website and furnish the object's URL to the company.
- D. Delete the object from the storage bucket after four hours.
- E. Create a new Cloud Storage bucket specifically for the external company to access.
- F. Copy the object to that bucket.
- G. Delete the bucket after four hours have passed.

Answer: A

NEW QUESTION 18

You are migrating a production-critical on-premises application that requires 96 vCPUs to perform its task. You want to make sure the application runs in a similar environment on GCP. What should you do?

- A. When creating the VM, use machine type n1-standard-96.
- B. When creating the VM, use Intel Skylake as the CPU platform.
- C. Create the VM using Compute Engine default settings.
- D. Use gcloud to modify the running instance to have 96 vCPUs.
- E. Start the VM using Compute Engine default settings, and adjust as you go based on Rightsizing Recommendations.

Answer: C

NEW QUESTION 19

You need to host an application on a Compute Engine instance in a project shared with other teams. You want to prevent the other teams from accidentally causing downtime on that application. Which feature should you use?

- A. Use a Shielded VM.
- B. Use a Preemptible VM.
- C. Use a sole-tenant node.
- D. Enable deletion protection on the instance.

Answer: D

NEW QUESTION 23

You are using Deployment Manager to create a Google Kubernetes Engine cluster. Using the same Deployment Manager deployment, you also want to create a DaemonSet in the kube-system namespace of the cluster. You want a solution that uses the fewest possible services. What should you do?

- A. Add the cluster's API as a new Type Provider in Deployment Manager, and use the new type to create the DaemonSet.
- B. Use the Deployment Manager Runtime Configurator to create a new Config resource that contains the DaemonSet definition.
- C. With Deployment Manager, create a Compute Engine instance with a startup script that uses kubectl to create the DaemonSet.
- D. In the cluster's definition in Deployment Manager, add a metadata that has kube-system as key and the DaemonSet manifest as value.

Answer: C

NEW QUESTION 25

You have a Compute Engine instance hosting an application used between 9 AM and 6 PM on weekdays. You want to back up this instance daily for disaster recovery purposes. You want to keep the backups for 30 days. You want the Google-recommended solution with the least management overhead and the least number of services. What should you do?

- A. * 1. Update your instances' metadata to add the following value: snapshot-schedule: 0 1 * * * * 2. Update your instances' metadata to add the following value: snapshot-retention: 30
- B. * 1. In the Cloud Console, go to the Compute Engine Disks page and select your instance's disk.* 2. In the Snapshot Schedule section, select Create Schedule and configure the following parameters:--Schedule frequency: Daily--Start time: 1:00 AM -- 2:00 AM--Autodelete snapshots after 30 days
- C. * 1. Create a Cloud Function that creates a snapshot of your instance's disk.* 2. Create a Cloud Function that deletes snapshots that are older than 30 days
- D. 3. Use Cloud Scheduler to trigger both Cloud Functions daily at 1:00 AM.
- E. * 1. Create a bash script in the instance that copies the content of the disk to Cloud Storage.* 2. Create a bash script in the instance that deletes data older than 30 days in the backup Cloud Storage bucket.* 3. Configure the instance's crontab to execute these scripts daily at 1:00 AM.

Answer: B

NEW QUESTION 28


You manage three Google Cloud projects with the Cloud Monitoring API enabled. You want to follow Google-recommended practices to visualize CPU and network metrics for all three projects together. What should you do?

- A. * 1. Create a Cloud Monitoring Dashboard* 2. Collect metrics and publish them into the Pub/Sub topics 3. Add CPU and network Charts (or each of (he three projects
- B. * 1. Create a Cloud Monitoring Dashboard.* 2. Select the CPU and Network metrics from the three projects.* 3. Add CPU and network Charts lot each of the three protects.
- C. * 1 Create a Service Account and apply roles/viewer on the three projects* 2. Collect metrics and publish them lo the Cloud Monitoring API* 3. Add CPU and network Charts for each of the three projects.
- D. * 1. Create a fourth Google Cloud project* 2 Create a Cloud Workspace from the fourth project and add the other three projects

Answer: B

NEW QUESTION 30

Your company has a 3-tier solution running on Compute Engine. The configuration of the current infrastructure is shown below.

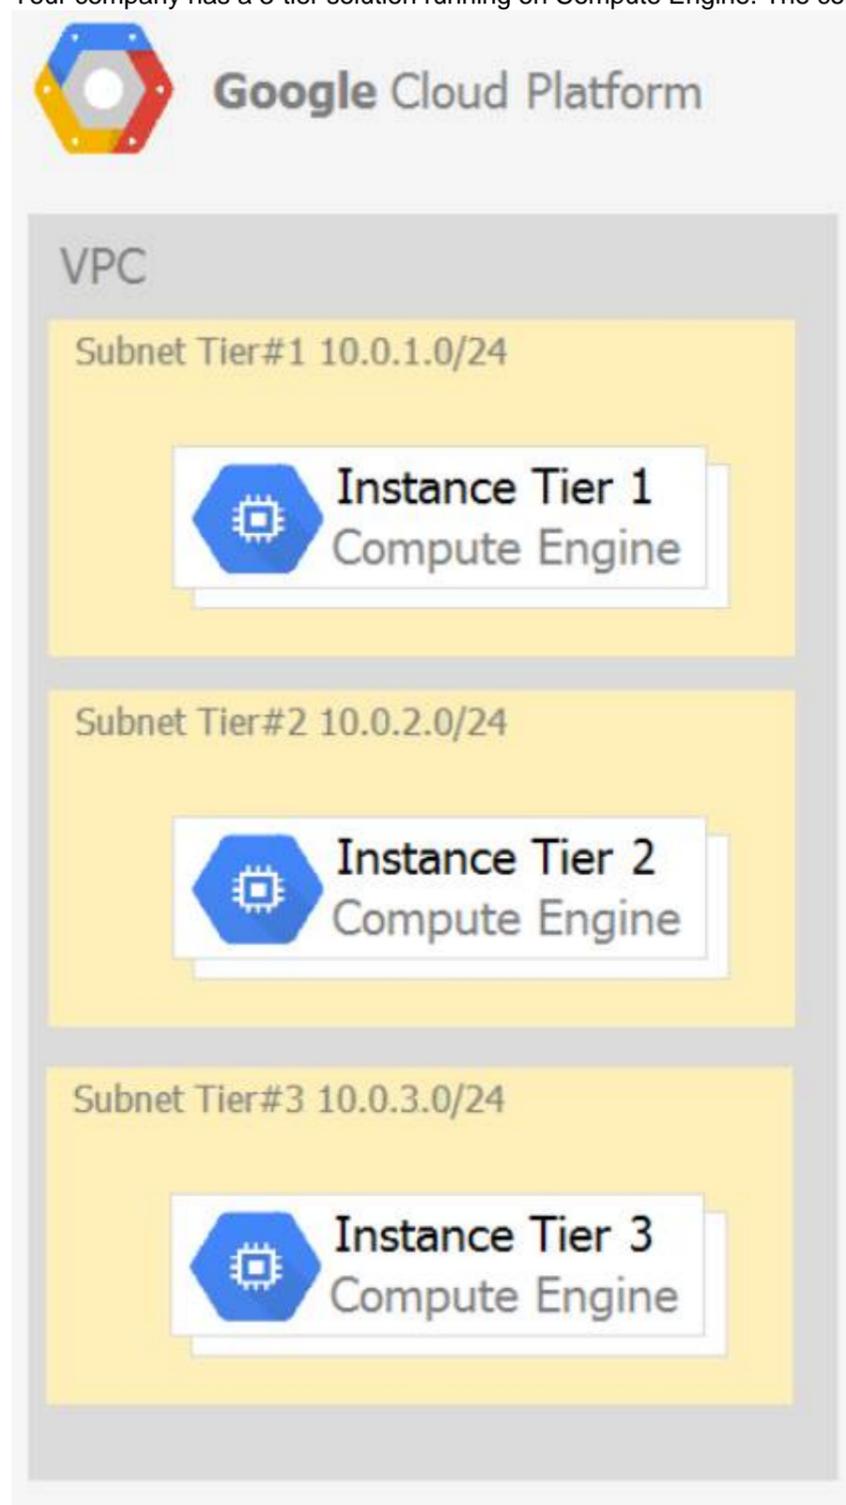

Each tier has a service account that is associated with all instances within it. You need to enable communication on TCP port 8080 between tiers as follows:

- Instances in tier #1 must communicate with tier #2.
- Instances in tier #2 must communicate with tier #3. What should you do?

- A. 1. Create an ingress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.2.0/24)• Protocols: allow all2. Create an ingress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.1.0/24)•Protocols: allow all
- B. 1. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #2 service account• Source filter: all instances with tier #1 service account• Protocols: allow TCP:80802. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #3 service account• Source filter: all instances with tier #2 service account• Protocols: allow TCP: 8080
- C. 1. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #2 service account• Source filter: all instances with tier #1 service account• Protocols: allow all2. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #3 service account• Source filter: all instances with tier #2 service account• Protocols: allow all
- D. 1. Create an egress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.2.0/24)• Protocols: allow TCP: 80802. Create an egress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.1.0/24)• Protocols: allow TCP: 8080

Answer: B

NEW QUESTION 33

You are given a project with a single virtual private cloud (VPC) and a single subnetwork in the us-central1 region. There is a Compute Engine instance hosting an application in this subnetwork. You need to deploy a new instance in the same project in the europe-west1 region. This new instance needs access to the application. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a subnetwork in the same VPC, in europe-west1.2. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- B. 1. Create a VPC and a subnetwork in europe-west1.2. Expose the application with an internal load balancer.3. Create the new instance in the new subnetwork and use the load balancer's address as the endpoint.
- C. 1. Create a subnetwork in the same VPC, in europe-west1.2. Use Cloud VPN to connect the two subnetworks.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- D. 1. Create a VPC and a subnetwork in europe-west1.2. Peer the 2 VPCs.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.

Answer: B

NEW QUESTION 36

You are using Google Kubernetes Engine with autoscaling enabled to host a new application. You want to expose this new application to the public, using HTTPS on a public IP address. What should you do?

- A. Create a Kubernetes Service of type NodePort for your application, and a Kubernetes Ingress to expose this Service via a Cloud Load Balancer.
- B. Create a Kubernetes Service of type ClusterIP for your applicatio
- C. Configure the public DNS name of your application using the IP of this Service.
- D. Create a Kubernetes Service of type NodePort to expose the application on port 443 of each node of the Kubernetes cluste
- E. Configure the public DNS name of your application with the IP of every node of the cluster to achieve load-balancing.
- F. Create a HAProxy pod in the cluster to load-balance the traffic to all the pods of the application.Forward the public traffic to HAProxy with an iptable rul
- G. Configure the DNS name of your application using the public IP of the node HAProxy is running on.

Answer: A

NEW QUESTION 37

You want to verify the IAM users and roles assigned within a GCP project named my-project. What should you do?

- A. Run `gcloud iam roles list`
- B. Review the output section.
- C. Run `gcloud iam service-accounts list`
- D. Review the output section.
- E. Navigate to the project and then to the IAM section in the GCP Consol
- F. Review the members and roles.
- G. Navigate to the project and then to the Roles section in the GCP Consol
- H. Review the roles and status.

Answer: D

NEW QUESTION 39

Your company uses a large number of Google Cloud services centralized in a single project. All teams have specific projects for testing and development. The DevOps team needs access to all of the production services in order to perform their job. You want to prevent Google Cloud product changes from broadening their permissions in the future. You want to follow Google-recommended practices. What should you do?

- A. Grant all members of the DevOps team the role of Project Editor on the organization level.
- B. Grant all members of the DevOps team the role of Project Editor on the production project.
- C. Create a custom role that combines the required permission
- D. Grant the DevOps team the custom role on the production project.
- E. Create a custom role that combines the required permission
- F. Grant the DevOps team the custom role on the organization level.

Answer: A

NEW QUESTION 44

Your organization needs to grant users access to query datasets in BigQuery but prevent them from accidentally deleting the datasets. You want a solution that follows Google-recommended practices. What should you do?

- A. Add users to roles/bigquery user role only, instead of roles/bigquery dataOwner.
- B. Add users to roles/bigquery dataEditor role only, instead of roles/bigquery dataOwner.
- C. Create a custom role by removing delete permissions, and add users to that role only.
- D. Create a custom role by removing delete permission
- E. Add users to the group, and then add the group to the custom role.

Answer: B

NEW QUESTION 48

You need to update a deployment in Deployment Manager without any resource downtime in the deployment. Which command should you use?

- A. `gcloud deployment-manager deployments create --config <deployment-config-path>`
- B. `gcloud deployment-manager deployments update --config <deployment-config-path>`
- C. `gcloud deployment-manager resources create --config <deployment-config-path>`
- D. `gcloud deployment-manager resources update --config <deployment-config-path>`

Answer: B

NEW QUESTION 49

Your company has a Google Cloud Platform project that uses BigQuery for data warehousing. Your data science team changes frequently and has few members. You need to allow members of this team to perform queries. You want to follow Google-recommended practices. What should you do?

- A. 1. Create an IAM entry for each data scientist's user account.2. Assign the BigQuery jobUser role to the group.
- B. 1. Create an IAM entry for each data scientist's user account.2. Assign the BigQuery dataViewer user role to the group.
- C. 1. Create a dedicated Google group in Cloud Identity.2. Add each data scientist's user account to the group.3. Assign the BigQuery jobUser role to the group.
- D. 1. Create a dedicated Google group in Cloud Identity.2. Add each data scientist's user account to the group.3. Assign the BigQuery dataViewer user role to the group.

Answer: D

NEW QUESTION 54

You need to manage multiple Google Cloud Platform (GCP) projects in the fewest steps possible. You want to configure the Google Cloud SDK command line interface (CLI) so that you can easily manage multiple GCP projects. What should you do?

- A. * 1. Create a configuration for each project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- B. * 1. Create a configuration for each project you need to manage.* 2. Use gcloud init to update the configuration values when you need to work with a non-default project
- C. * 1. Use the default configuration for one project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- D. * 1. Use the default configuration for one project you need to manage.* 2. Use gcloud init to update the configuration values when you need to work with a non-default project.

Answer: D

NEW QUESTION 59

You have an application on a general-purpose Compute Engine instance that is experiencing excessive disk read throttling on its Zonal SSD Persistent Disk. The application primarily reads large files from disk. The disk size is currently 350 GB. You want to provide the maximum amount of throughput while minimizing costs. What should you do?

- A. Increase the size of the disk to 1 TB.
- B. Increase the allocated CPU to the instance.
- C. Migrate to use a Local SSD on the instance.
- D. Migrate to use a Regional SSD on the instance.

Answer: C

NEW QUESTION 63

You are the project owner of a GCP project and want to delegate control to colleagues to manage buckets and files in Cloud Storage. You want to follow Google-recommended practices. Which IAM roles should you grant your colleagues?

- A. Project Editor
- B. Storage Admin
- C. Storage Object Admin
- D. Storage Object Creator

Answer: B

NEW QUESTION 67

You need to set a budget alert for use of Compute Engine services on one of the three Google Cloud Platform projects that you manage. All three projects are linked to a single billing account. What should you do?

- A. Verify that you are the project billing administrator
- B. Select the associated billing account and create a budget and alert for the appropriate project.
- C. Verify that you are the project billing administrator
- D. Select the associated billing account and create a budget and a custom alert.
- E. Verify that you are the project administrator
- F. Select the associated billing account and create a budget for the appropriate project.
- G. Verify that you are project administrator
- H. Select the associated billing account and create a budget and a custom alert.

Answer: B

NEW QUESTION 70

You have an application that looks for its licensing server on the IP 10.0.3.21. You need to deploy the licensing server on Compute Engine. You do not want to change the configuration of the application and want the application to be able to reach the licensing server. What should you do?

- A. Reserve the IP 10.0.3.21 as a static internal IP address using gcloud and assign it to the licensing server.
- B. Reserve the IP 10.0.3.21 as a static public IP address using gcloud and assign it to the licensing server.
- C. Use the IP 10.0.3.21 as a custom ephemeral IP address and assign it to the licensing server.
- D. Start the licensing server with an automatic ephemeral IP address, and then promote it to a static internal IP address.

Answer: A

NEW QUESTION 74

You are assigned to maintain a Google Kubernetes Engine (GKE) cluster named dev that was deployed on Google Cloud. You want to manage the GKE configuration using the command line interface (CLI). You have just downloaded and installed the Cloud SDK. You want to ensure that future CLI commands by default address this specific cluster. What should you do?

- A. Use the command `gcloud config set container/cluster dev`
- B. Use the command `gcloud container clusters update dev`
- C. Create a file called `gk`
- D. default in the `~/gcloud` folder that contains the cluster name
- E. Create a file called `default`
- F. json in the `~/gcloud` folder that contains the cluster name

Answer: B

NEW QUESTION 75

You have a web application deployed as a managed instance group. You have a new version of the application to gradually deploy. Your web application is currently receiving live web traffic. You want to ensure that the available capacity does not decrease during the deployment. What should you do?

- A. Perform a rolling-action start-update with `maxSurge` set to 0 and `maxUnavailable` set to 1.
- B. Perform a rolling-action start-update with `maxSurge` set to 1 and `maxUnavailable` set to 0.
- C. Create a new managed instance group with an updated instance template
- D. Add the group to the backend service for the load balance
- E. When all instances in the new managed instance group are healthy, delete the old managed instance group.
- F. Create a new instance template with the new application version
- G. Update the existing managed instance group with the new instance template
- H. Delete the instances in the managed instance group to allow the managed instance group to recreate the instance using the new instance template.

Answer: B

NEW QUESTION 79

You host a static website on Cloud Storage. Recently, you began to include links to PDF files on this site.

Currently, when users click on the links to these PDF files, their browsers prompt them to save the file onto their local system. Instead, you want the clicked PDF files to be displayed within the browser window directly, without prompting the user to save the file locally. What should you do?

- A. Enable Cloud CDN on the website frontend.
- B. Enable 'Share publicly' on the PDF file objects.
- C. Set Content-Type metadata to `application/pdf` on the PDF file objects.
- D. Add a label to the storage bucket with a key of Content-Type and value of `application/pdf`.

Answer: C

NEW QUESTION 80

An employee was terminated, but their access to Google Cloud Platform (GCP) was not removed until 2 weeks later. You need to find out this employee accessed any sensitive customer information after their termination. What should you do?

- A. View System Event Logs in Stackdriver
- B. Search for the user's email as the principal.
- C. View System Event Logs in Stackdriver
- D. Search for the service account associated with the user.
- E. View Data Access audit logs in Stackdriver
- F. Search for the user's email as the principal.
- G. View the Admin Activity log in Stackdriver
- H. Search for the service account associated with the user.

Answer: B

NEW QUESTION 81

You have production and test workloads that you want to deploy on Compute Engine. Production VMs need to be in a different subnet than the test VMs. All the VMs must be able to reach each other over internal IP without creating additional routes. You need to set up VPC and the 2 subnets. Which configuration meets these requirements?

- A. Create a single custom VPC with 2 subnet
- B. Create each subnet in a different region and with a different CIDR range.
- C. Create a single custom VPC with 2 subnet
- D. Create each subnet in the same region and with the same CIDR range.
- E. Create 2 custom VPCs, each with a single subnet
- F. Create each subnet in a different region and with a different CIDR range.
- G. Create 2 custom VPCs, each with a single subnet
- H. Create each subnet in the same region and with the same CIDR range.

Answer: A

NEW QUESTION 82

You are building an archival solution for your data warehouse and have selected Cloud Storage to archive your data. Your users need to be able to access this archived data once a quarter for some regulatory requirements. You want to select a cost-efficient option. Which storage option should you use?

- A. Cold Storage

- B. Nearline Storage
- C. Regional Storage
- D. Multi-Regional Storage

Answer: B

Explanation:

Nearline, Coldline, and Archive offer ultra low-cost, highly-durable, highly available archival storage. For data accessed less than once a year, Archive is a cost-effective storage option for long-term preservation of data.

Coldline is also ideal for cold storage—data your business expects to touch less than once a quarter. For warmer storage, choose Nearline: data you expect to access less than once a month, but possibly multiple times throughout the year. All storage classes are available across all GCP regions and provide unparalleled sub-second access speeds with a consistent API.

NEW QUESTION 83

You are configuring service accounts for an application that spans multiple projects. Virtual machines (VMs) running in the web-applications project need access to BigQuery datasets in crm-databases-proj. You want to follow Google-recommended practices to give access to the service account in the web-applications project. What should you do?

- A. Give “project owner” for web-applications appropriate roles to crm-databases- proj
- B. Give “project owner” role to crm-databases-proj and the web-applications project.
- C. Give “project owner” role to crm-databases-proj and bigquery.dataViewer role to web-applications.
- D. Give bigquery.dataViewer role to crm-databases-proj and appropriate roles to web-applications.

Answer: D

NEW QUESTION 88

You are hosting an application on bare-metal servers in your own data center. The application needs access to Cloud Storage. However, security policies prevent the servers hosting the application from having public IP addresses or access to the internet. You want to follow Google-recommended practices to provide the application with access to Cloud Storage. What should you do?

- A. 1. Use nslookup to get the IP address for storage.googleapis.com.2. Negotiate with the security team to be able to give a public IP address to the servers.3. Only allow egress traffic from those servers to the IP addresses for storage.googleapis.com.
- B. 1. Using Cloud VPN, create a VPN tunnel to a Virtual Private Cloud (VPC) in Google Cloud Platform (GCP).2. In this VPC, create a Compute Engine instance and install the Squid proxy server on this instance.3. Configure your servers to use that instance as a proxy to access Cloud Storage.
- C. 1. Use Migrate for Compute Engine (formerly known as Velostrata) to migrate those servers to Compute Engine.2. Create an internal load balancer (ILB) that uses storage.googleapis.com as backend.3. Configure your new instances to use this ILB as proxy.
- D. 1. Using Cloud VPN or Interconnect, create a tunnel to a VPC in GCP.2. Use Cloud Router to create a custom route advertisement for 199.36.153.4/30. Announce that network to your on-premises network through the VPN tunnel.3. In your on-premises network, configure your DNS server to resolve*.googleapis.com as a CNAME to restricted.googleapis.com.

Answer: D

NEW QUESTION 91

You want to add a new auditor to a Google Cloud Platform project. The auditor should be allowed to read, but not modify, all project items. How should you configure the auditor's permissions?

- A. Create a custom role with view-only project permission
- B. Add the user's account to the custom role.
- C. Create a custom role with view-only service permission
- D. Add the user's account to the custom role.
- E. Select the built-in IAM project Viewer rol
- F. Add the user's account to this role.
- G. Select the built-in IAM service Viewer rol
- H. Add the user's account to this role.

Answer: C

NEW QUESTION 93

You are operating a Google Kubernetes Engine (GKE) cluster for your company where different teams can run non-production workloads. Your Machine Learning (ML) team needs access to Nvidia Tesla P100 GPUs to train their models. You want to minimize effort and cost. What should you do?

- A. Ask your ML team to add the “accelerator: gpu” annotation to their pod specification.
- B. Recreate all the nodes of the GKE cluster to enable GPUs on all of them.
- C. Create your own Kubernetes cluster on top of Compute Engine with nodes that have GPU
- D. Dedicate this cluster to your ML team.
- E. Add a new, GPU-enabled, node pool to the GKE cluste
- F. Ask your ML team to add the cloud.google.com/gke -accelerator: nvidia-tesla-p100 nodeSelector to their pod specification.

Answer: B

NEW QUESTION 98

You have an application running in Google Kubernetes Engine (GKE) with cluster autoscaling enabled. The application exposes a TCP endpoint. There are several replicas of this application. You have a Compute Engine instance in the same region, but in another Virtual Private Cloud (VPC), called gce-network, that has no overlapping IP ranges with the first VPC. This instance needs to connect to the application on GKE. You want to minimize effort. What should you do?

- A. 1. In GKE, create a Service of type LoadBalancer that uses the application's Pods as backend.2. Set the service's externalTrafficPolicy to Cluster.3. Configure the Compute Engine instance to use the address of the load balancer that has been created.
- B. 1. In GKE, create a Service of type NodePort that uses the application's Pods as backend.2. Create a Compute Engine instance called proxy with 2 network

interfaces, one in each VPC.3. Use iptables on this instance to forward traffic from gce-network to the GKE nodes.4. Configure the Compute Engine instance to use the address of proxy in gce-network as endpoint.

- C. 1. In GKE, create a Service of type LoadBalancer that uses the application's Pods as backend.2. Add an annotation to this service: cloud.google.com/load-balancer-type: Internal3. Peer the two VPCs together.4. Configure the Compute Engine instance to use the address of the load balancer that has been created.
- D. 1. In GKE, create a Service of type LoadBalancer that uses the application's Pods as backend.2. Add a Cloud Armor Security Policy to the load balancer that whitelists the internal IPs of the MIG's instances.3. Configure the Compute Engine instance to use the address of the load balancer that has been created.

Answer: A

NEW QUESTION 103

You are managing several Google Cloud Platform (GCP) projects and need access to all logs for the past 60 days. You want to be able to explore and quickly analyze the log contents. You want to follow Google- recommended practices to obtain the combined logs for all projects. What should you do?

- A. Navigate to Stackdriver Logging and select resource.labels.project_id=""
- B. Create a Stackdriver Logging Export with a Sink destination to a BigQuery datase
- C. Configure the table expiration to 60 days.
- D. Create a Stackdriver Logging Export with a Sink destination to Cloud Storag
- E. Create a lifecycle rule to delete objects after 60 days.
- F. Configure a Cloud Scheduler job to read from Stackdriver and store the logs in BigQuer
- G. Configure the table expiration to 60 days.

Answer: B

NEW QUESTION 106

You have a Dockerfile that you need to deploy on Kubernetes Engine. What should you do?

- A. Use kubectl app deploy <dockerfilename>.
- B. Use gcloud app deploy <dockerfilename>.
- C. Create a docker image from the Dockerfile and upload it to Container Registr
- D. Create a Deployment YAML file to point to that imag
- E. Use kubectl to create the deployment with that file.
- F. Create a docker image from the Dockerfile and upload it to Cloud Storag
- G. Create a Deployment YAML file to point to that imag
- H. Use kubectl to create the deployment with that file.

Answer: C

NEW QUESTION 110

You are building an application that will run in your data center. The application will use Google Cloud Platform (GCP) services like AutoML. You created a service account that has appropriate access to AutoML. You need to enable authentication to the APIs from your on-premises environment. What should you do?

- A. Use service account credentials in your on-premises application.
- B. Use gcloud to create a key file for the service account that has appropriate permissions.
- C. Set up direct interconnect between your data center and Google Cloud Platform to enable authentication for your on-premises applications.
- D. Go to the IAM & admin console, grant a user account permissions similar to the service account permissions, and use this user account for authentication from your data center.

Answer: B

NEW QUESTION 113

You need to create a custom VPC with a single subnet. The subnet's range must be as large as possible. Which range should you use?

- A. .00.0.0/0
- B. 10.0.0.0/8
- C. 172.16.0.0/12
- D. 192.168.0.0/16

Answer: B

Explanation:

https://cloud.google.com/vpc/docs/vpc#manually_created_subnet_ip_ranges

NEW QUESTION 118

Your organization has strict requirements to control access to Google Cloud projects. You need to enable your Site Reliability Engineers (SREs) to approve requests from the Google Cloud support team when an SRE opens a support case. You want to follow Google-recommended practices. What should you do?

- A. Add your SREs to roles/iam.roleAdmin role.
- B. Add your SREs to roles/accessapproval approver role.
- C. Add your SREs to a group and then add this group to roles/iam roleAdmin role.
- D. Add your SREs to a group and then add this group to roles/accessapproval approver role.

Answer: A

NEW QUESTION 121


Your organization uses Active Directory (AD) to manage user identities. Each user uses this identity for federated access to various on-premises systems. Your security team has adopted a policy that requires users to log into Google Cloud with their AD identity instead of their own login. You want to follow the Google-recommended practices to implement this policy. What should you do?

- A. Sync Identities with Cloud Directory Sync, and then enable SAML for single sign-on
- B. Sync Identities in the Google Admin console, and then enable Oauth for single sign-on
- C. Sync identities with 3rd party LDAP sync, and then copy passwords to allow simplified login with (he same credentials
- D. Sync identities with Cloud Directory Sync, and then copy passwords to allow simplified login with the same credentials.

Answer: A

NEW QUESTION 126

You are building a pipeline to process time-series data. Which Google Cloud Platform services should you put in boxes 1,2,3, and 4?

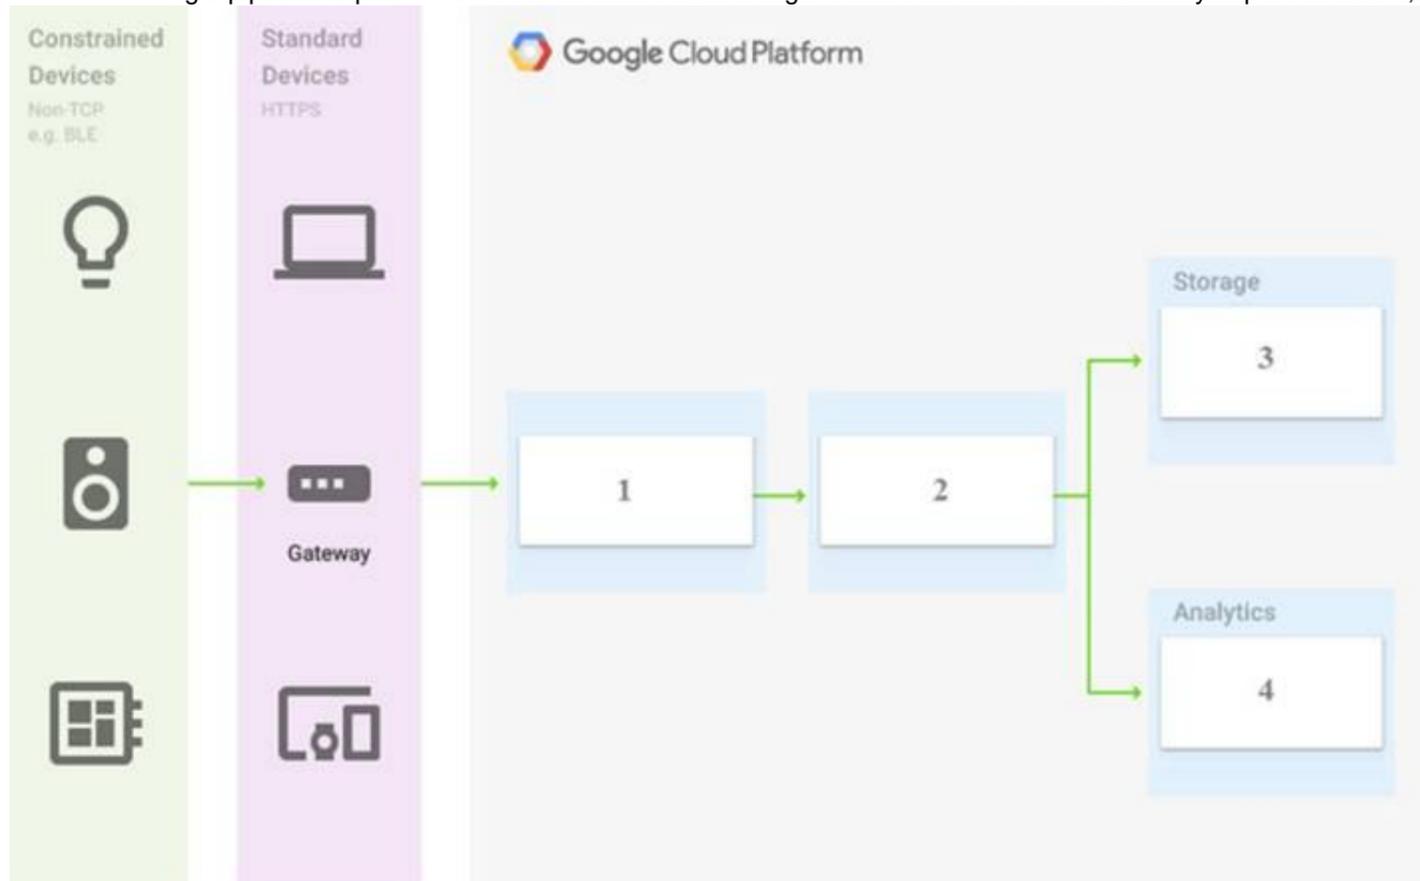

- A. Cloud Pub/Sub, Cloud Dataflow, Cloud Datastore, BigQuery
- B. Firebase Messages, Cloud Pub/Sub, Cloud Spanner, BigQuery
- C. Cloud Pub/Sub, Cloud Storage, BigQuery, Cloud Bigtable
- D. Cloud Pub/Sub, Cloud Dataflow, Cloud Bigtable, BigQuery

Answer: D

NEW QUESTION 131

A colleague handed over a Google Cloud Platform project for you to maintain. As part of a security checkup, you want to review who has been granted the Project Owner role. What should you do?

- A. In the console, validate which SSH keys have been stored as project-wide keys.
- B. Navigate to Identity-Aware Proxy and check the permissions for these resources.
- C. Enable Audit Logs on the IAM & admin page for all resources, and validate the results.
- D. Use the command `gcloud projects get-iam-policy` to view the current role assignments.

Answer: B

NEW QUESTION 135

You want to send and consume Cloud Pub/Sub messages from your App Engine application. The Cloud Pub/Sub API is currently disabled. You will use a service account to authenticate your application to the API. You want to make sure your application can use Cloud Pub/Sub. What should you do?

- A. Enable the Cloud Pub/Sub API in the API Library on the GCP Console.
- B. Rely on the automatic enablement of the Cloud Pub/Sub API when the Service Account accesses it.
- C. Use Deployment Manager to deploy your applicatio
- D. Rely on the automatic enablement of all APIs used by the application being deployed.
- E. Grant the App Engine Default service account the role of Cloud Pub/Sub Admi
- F. Have your application enable the API on the first connection to Cloud Pub/Sub.

Answer: A

NEW QUESTION 138

You have been asked to set up Object Lifecycle Management for objects stored in storage buckets. The objects are written once and accessed frequently for 30 days. After 30 days, the objects are not read again unless there is a special need. The object should be kept for three years, and you need to minimize cost. What should you do?

- A. Set up a policy that uses Nearline storage for 30 days and then moves to Archive storage for three years.
- B. Set up a policy that uses Standard storage for 30 days and then moves to Archive storage for three years.
- C. Set up a policy that uses Nearline storage for 30 days, then moves the Coldline for one year, and then moves to Archive storage for two years.
- D. Set up a policy that uses Standard storage for 30 days, then moves to Coldline for one year, and then moves to Archive storage for two years.

Answer: A

NEW QUESTION 141

Your company implemented BigQuery as an enterprise data warehouse. Users from multiple business units run queries on this data warehouse. However, you notice that query costs for BigQuery are very high, and you need to control costs. Which two methods should you use? (Choose two.)

- A. Split the users from business units to multiple projects.
- B. Apply a user- or project-level custom query quota for BigQuery data warehouse.
- C. Create separate copies of your BigQuery data warehouse for each business unit.
- D. Split your BigQuery data warehouse into multiple data warehouses for each business unit.
- E. Change your BigQuery query model from on-demand to flat rat
- F. Apply the appropriate number of slots to each Project.

Answer: BE

NEW QUESTION 146

You are running a data warehouse on BigQuery. A partner company is offering a recommendation engine based on the data in your data warehouse. The partner company is also running their application on Google Cloud. They manage the resources in their own project, but they need access to the BigQuery dataset in your project. You want to provide the partner company with access to the dataset What should you do?

- A. Create a Service Account in your own project, and grant this Service Account access to BigQuery in your project
- B. Create a Service Account in your own project, and ask the partner to grant this Service Account access to BigQuery in their project
- C. Ask the partner to create a Service Account in their project, and have them give the Service Account access to BigQuery in their project
- D. Ask the partner to create a Service Account in their project, and grant their Service Account access to the BigQuery dataset in your project

Answer: D

NEW QUESTION 150

You want to find out when users were added to Cloud Spanner Identity Access Management (IAM) roles on your Google Cloud Platform (GCP) project. What should you do in the GCP Console?

- A. Open the Cloud Spanner console to review configurations.
- B. Open the IAM & admin console to review IAM policies for Cloud Spanner roles.
- C. Go to the Stackdriver Monitoring console and review information for Cloud Spanner.
- D. Go to the Stackdriver Logging console, review admin activity logs, and filter them for Cloud Spanner IAM roles.

Answer: B

NEW QUESTION 153

You need to create a Compute Engine instance in a new project that doesn't exist yet. What should you do?

- A. Using the Cloud SDK, create a new project, enable the Compute Engine API in that project, and then create the instance specifying your new project.
- B. Enable the Compute Engine API in the Cloud Console, use the Cloud SDK to create the instance, and then use the `—project` flag to specify a new project.
- C. Using the Cloud SDK, create the new instance, and use the `—project` flag to specify the new project. Answer yes when prompted by Cloud SDK to enable the Compute Engine API.
- D. Enable the Compute Engine API in the Cloud Consol
- E. Go to the Compute Engine section of the Console to create a new instance, and look for the Create In A New Project option in the creation form.

Answer: A

NEW QUESTION 156

Your company has a large quantity of unstructured data in different file formats. You want to perform ETL transformations on the data. You need to make the data accessible on Google Cloud so it can be processed by a Dataflow job. What should you do?

- A. Upload the data to BigQuery using the `bq` command line tool.
- B. Upload the data to Cloud Storage using the `gsutil` command line tool.
- C. Upload the data into Cloud SQL using the `import` function in the console.
- D. Upload the data into Cloud Spanner using the `import` function in the console.

Answer: A

NEW QUESTION 161

For analysis purposes, you need to send all the logs from all of your Compute Engine instances to a BigQuery dataset called `platform-logs`. You have already installed the Stackdriver Logging agent on all the instances. You want to minimize cost. What should you do?

- A. 1. Give the BigQuery Data Editor role on the `platform-logs` dataset to the service accounts used by your instances.2. Update your instances' metadata to add the following value: `logs-destination:bq://platform-logs`.
- B. 1. In Stackdriver Logging, create a logs export with a Cloud Pub/Sub topic called `logs` as a sink.2.Create a Cloud Function that is triggered by messages in the `logs` topic.3. Configure that Cloud Function to drop logs that are not from Compute Engine and to insert Compute Engine logs in the `platform-logs` dataset.
- C. 1. In Stackdriver Logging, create a filter to view only Compute Engine logs.2. Click Create Export.3.Choose BigQuery as Sink Service, and the `platform-logs` dataset as Sink Destination.
- D. 1. Create a Cloud Function that has the BigQuery User role on the `platform-logs` dataset.2. Configure this Cloud Function to create a BigQuery Job that executes this query:`INSERT INTOdataset.platform-logs (timestamp, log)SELECT timestamp, log FROM compute.logsWHERE timestamp> DATE_SUB(CURRENT_DATE(), INTERVAL 1 DAY)3. Use Cloud Scheduler to trigger this Cloud Function once a day.`

Answer: C

NEW QUESTION 162

You need to set up a policy so that videos stored in a specific Cloud Storage Regional bucket are moved to Coldline after 90 days, and then deleted after one year from their creation. How should you set up the policy?

- A. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- B. Set the SetStorageClass action to 90 days and the Delete action to 275 days (365 – 90)
- C. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- D. Set the SetStorageClass action to 90 days and the Delete action to 365 days.
- E. Use gsutil rewrite and set the Delete action to 275 days (365-90).
- F. Use gsutil rewrite and set the Delete action to 365 days.

Answer: A

NEW QUESTION 164

You need to monitor resources that are distributed over different projects in Google Cloud Platform. You want to consolidate reporting under the same Stackdriver Monitoring dashboard. What should you do?

- A. Use Shared VPC to connect all projects, and link Stackdriver to one of the projects.
- B. For each project, create a Stackdriver account
- C. In each project, create a service account for that project and grant it the role of Stackdriver Account Editor in all other projects.
- D. Configure a single Stackdriver account, and link all projects to the same account.
- E. Configure a single Stackdriver account for one of the project
- F. In Stackdriver, create a Group and add the other project names as criteria for that Group.

Answer: D

NEW QUESTION 166

You need to track and verify modifications to a set of Google Compute Engine instances in your Google Cloud project. In particular, you want to verify OS system patching events on your virtual machines (VMs). What should you do?

- A. Review the Compute Engine activity logs Select and review the Admin Event logs
- B. Review the Compute Engine activity logs Select and review the System Event logs
- C. Install the Cloud Logging Agent In Cloud Logging review the Compute Engine syslog logs
- D. Install the Cloud Logging Agent In Cloud Logging, review the Compute Engine operation logs

Answer: A

NEW QUESTION 170

You are creating a Google Kubernetes Engine (GKE) cluster with a cluster autoscaler feature enabled. You need to make sure that each node of the cluster will run a monitoring pod that sends container metrics to a third-party monitoring solution. What should you do?

- A. Deploy the monitoring pod in a StatefulSet object.
- B. Deploy the monitoring pod in a DaemonSet object.
- C. Reference the monitoring pod in a Deployment object.
- D. Reference the monitoring pod in a cluster initializer at the GKE cluster creation time.

Answer: B

NEW QUESTION 174

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your Associate-Cloud-Engineer Exam with Our Prep Materials Via below:

<https://www.certleader.com/Associate-Cloud-Engineer-dumps.html>