

ISC2

Exam Questions SSCP

System Security Certified Practitioner (SSCP)



NEW QUESTION 1

- (Topic 1)

The type of discretionary access control (DAC) that is based on an individual's identity is also called:

- A. Identity-based Access control
- B. Rule-based Access control
- C. Non-Discretionary Access Control
- D. Lattice-based Access control

Answer: A

Explanation:

An identity-based access control is a type of Discretionary Access Control (DAC) that is based on an individual's identity.

DAC is good for low level security environment. The owner of the file decides who has access to the file.

If a user creates a file, he is the owner of that file. An identifier for this user is placed in the file header and/or in an access control matrix within the operating system.

Ownership might also be granted to a specific individual. For example, a manager for a certain department might be made the owner of the files and resources within her department. A system that uses discretionary access control (DAC) enables the owner of the resource to specify which subjects can access specific resources.

This model is called discretionary because the control of access is based on the discretion of the owner. Many times department managers, or business unit managers, are the owners of the data within their specific department. Being the owner, they can specify who should have access and who should not.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 220). McGraw- Hill . Kindle Edition.

NEW QUESTION 2

- (Topic 1)

Which is the last line of defense in a physical security sense?

- A. people
- B. interior barriers
- C. exterior barriers
- D. perimeter barriers

Answer: A

Explanation:

"Ultimately, people are the last line of defense for your company's assets" (Pastore & Dulaney, 2006, p. 529).

Pastore, M. and Dulaney, E. (2006). CompTIA Security+ study guide: Exam SY0-101. Indianapolis, IN: Sybex.

NEW QUESTION 3

- (Topic 1)

A potential problem related to the physical installation of the Iris Scanner in regards to the usage of the iris pattern within a biometric system is:

- A. concern that the laser beam may cause eye damage
- B. the iris pattern changes as a person grows older.
- C. there is a relatively high rate of false accepts.
- D. the optical unit must be positioned so that the sun does not shine into the aperture.

Answer: D

Explanation:

Because the optical unit utilizes a camera and infrared light to create the images, sun light can impact the aperture so it must not be positioned in direct light of any type. Because the subject does not need to have direct contact with the optical reader, direct light can impact the reader.

An Iris recognition is a form of biometrics that is based on the uniqueness of a subject's iris. A camera like device records the patterns of the iris creating what is known as Iriscode.

It is the unique patterns of the iris that allow it to be one of the most accurate forms of biometric identification of an individual. Unlike other types of biometrics, the iris rarely changes over time. Fingerprints can change over time due to scarring and manual labor, voice patterns can change due to a variety of causes, hand geometry can also change as well. But barring surgery or an accident it is not usual for an iris to change. The subject has a high-resolution image taken of their iris and this is then converted to Iriscode. The current standard for the Iriscode was developed by John Daugman. When the subject attempts to be authenticated an infrared light is used to capture the iris image and this image is then compared to the Iriscode. If there is a match the subject's identity is confirmed. The subject does not need to have direct contact with the optical reader so it is a less invasive means of authentication than retinal scanning would be.

Reference(s) used for this question: AIO, 3rd edition, Access Control, p 134. AIO, 4th edition, Access Control, p 182.

Wikipedia - http://en.wikipedia.org/wiki/Iris_recognition The following answers are incorrect:

concern that the laser beam may cause eye damage. The optical readers do not use laser so, concern that the laser beam may cause eye damage is not an issue. the iris pattern changes as a person grows older. The question asked about the physical installation of the scanner, so this was not the best answer. If the question would have been about long term problems then it could have been the best choice. Recent research has shown that Irises actually do change over time:

<http://www.nature.com/news/ageing-eyes-hinder-biometric-scans-1.10722>

there is a relatively high rate of false accepts. Since the advent of the Iriscode there is a very low rate of false accepts, in fact the algorithm used has never had a false match. This all depends on the quality of the equipment used but because of the uniqueness of the iris even when comparing identical twins, iris patterns are unique.

NEW QUESTION 4

- (Topic 1)

Which of following is not a service provided by AAA servers (Radius, TACACS and DIAMETER)?

- A. Authentication
- B. Administration
- C. Accounting

D. Authorization

Answer: B

Explanation:

Radius, TACACS and DIAMETER are classified as authentication, authorization, and accounting (AAA) servers.

Source: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 2, 2001, CRC Press, NY, Page 33.

also see:

The term "AAA" is often used, describing cornerstone concepts [of the AIC triad] Authentication, Authorization, and Accountability. Left out of the AAA acronym is Identification which is required before the three "A's" can follow. Identity is a claim, Authentication proves an identity, Authorization describes the action you can perform on a system once you have been identified and authenticated, and accountability holds users accountable for their actions.

Reference: CISSP Study Guide, Conrad Misenar, Feldman p. 10-11, (c) 2010 Elsevier.

NEW QUESTION 5

- (Topic 1)

To control access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up:

- A. Access Rules
- B. Access Matrix
- C. Identification controls
- D. Access terminal

Answer: A

Explanation:

Controlling access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up access rules.

These rules can be classified into three access control models: Mandatory, Discretionary, and Non-Discretionary.

An access matrix is one of the means used to implement access control.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 6

- (Topic 1)

Which of the following is most affected by denial-of-service (DOS) attacks?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

Answer: D

Explanation:

Denial of service attacks obviously affect availability of targeted systems. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 61).

NEW QUESTION 7

- (Topic 1)

Which of the following is a trusted, third party authentication protocol that was developed under Project Athena at MIT?

- A. Kerberos
- B. SESAME
- C. KryptoKnight
- D. NetSP

Answer: A

Explanation:

Kerberos is a trusted, third party authentication protocol that was developed under Project Athena at MIT.

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. A free implementation of this protocol is available from the Massachusetts Institute of Technology. Kerberos is available in many commercial products as well.

The Internet is an insecure place. Many of the protocols used in the Internet do not provide any security. Tools to "sniff" passwords off of the network are in common use by systems crackers. Thus, applications which send an unencrypted password over the network are extremely vulnerable. Worse yet, other client/server applications rely on the client program to be "honest" about the identity of the user who is using it. Other applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server.

Some sites attempt to use firewalls to solve their network security problems. Unfortunately, firewalls assume that "the bad guys" are on the outside, which is often a very bad

assumption. Most of the really damaging incidents of computer crime are carried out by insiders. Firewalls also have a significant disadvantage in that they restrict how your users can use the Internet. (After all, firewalls are simply a less extreme example of the dictum that there is nothing more secure than a computer which is not connected to the network --- and powered off!) In many places, these restrictions are simply unrealistic and unacceptable.

Kerberos was created by MIT as a solution to these network security problems. The Kerberos protocol uses strong cryptography so that a client can prove its identity to a server (and vice versa) across an insecure network connection. After a client and server have used Kerberos to prove their identity, they can also encrypt all of their communications to assure privacy and data integrity as they go about their business.

Kerberos is freely available from MIT, under a copyright permission notice very similar to the one used for the BSD operating and X11 Windowing system. MIT provides Kerberos in source form, so that anyone who wishes to use it may look over the code for themselves and assure themselves that the code is trustworthy. In addition, for those who prefer to rely on a professional supported product, Kerberos is available as a product from many different vendors.

In summary, Kerberos is a solution to your network security problems. It provides the tools of authentication and strong cryptography over the network to help you secure your information systems across your entire enterprise. We hope you find Kerberos as useful as it has been to us. At MIT, Kerberos has been invaluable to our Information/Technology architecture.

KryptoKnight is a Peer to Peer authentication protocol incorporated into the NetSP product from IBM.

SESAME is an authentication and access control protocol, that also supports communication confidentiality and integrity. It provides public key based

authentication along with the Kerberos style authentication, that uses symmetric key cryptography. Sesame supports the Kerberos protocol and adds some security extensions like public key based authentication and an ECMA-style Privilege Attribute Service. The complete Sesame protocol is a two step process. In the first step, the client successfully authenticates itself to the Authentication Server and obtains a ticket that can be presented to the Privilege Attribute Server. In the second step, the initiator obtains proof of his access rights in the form of Privilege Attributes Certificate (PAC). The PAC is a specific form of Access Control Certificate as defined in the ECMA-219 document. This document describes the extensions to Kerberos for public key based authentication as adopted in Sesame. SESAME, KryptoKnight, and NetSP never took off and the protocols are no longer commonly used.

References:

<http://www.cmf.nrl.navy.mil/CCS/people/kenh/kerberos-faq.html#whatis> and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

NEW QUESTION 8

- (Topic 1)

Which of the following is an example of a passive attack?

- A. Denying services to legitimate users
- B. Shoulder surfing
- C. Brute-force password cracking
- D. Smurfing

Answer: B

Explanation:

Shoulder surfing is a form of a passive attack involving stealing passwords, personal identification numbers or other confidential information by looking over someone's shoulder. All other forms of attack are active attacks, where a threat makes a modification to the system in an attempt to take advantage of a vulnerability.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 3: Security Management Practices (page 63).

NEW QUESTION 9

- (Topic 1)

In the Bell-LaPadula model, the Star-property is also called:

- A. The simple security property
- B. The confidentiality property
- C. The confinement property
- D. The tranquility property

Answer: B

Explanation:

The Bell-LaPadula model focuses on data confidentiality and access to classified information, in contrast to the Biba Integrity Model which describes rules for the protection of data integrity.

In this formal model, the entities in an information system are divided into subjects and objects.

The notion of a "secure state" is defined, and it is proven that each state transition preserves security by moving from secure state to secure state, thereby proving that the system satisfies the security objectives of the model.

The Bell-LaPadula model is built on the concept of a state machine with a set of allowable states in a system. The transition from one state to another state is defined by transition functions.

A system state is defined to be "secure" if the only permitted access modes of subjects to objects are in accordance with a security policy.

To determine whether a specific access mode is allowed, the clearance of a subject is compared to the classification of the object (more precisely, to the combination of classification and set of compartments, making up the security level) to determine if the subject is authorized for the specific access mode.

The clearance/classification scheme is expressed in terms of a lattice. The model defines two mandatory access control (MAC) rules and one discretionary access control (DAC) rule with three security properties:

The Simple Security Property - a subject at a given security level may not read an object at a higher security level (no read-up).

The property (read "star"-property) - a subject at a given security level must not write to any object at a lower security level (no write-down). The property is also known as the Confinement property.

The Discretionary Security Property - use an access control matrix to specify the discretionary access control.

The transfer of information from a high-sensitivity document to a lower-sensitivity document may happen in the Bell-LaPadula model via the concept of trusted subjects. Trusted Subjects are not restricted by the property. Untrusted subjects are.

Trusted Subjects must be shown to be trustworthy with regard to the security policy. This security model is directed toward access control and is characterized by the phrase: "no read up, no write down." Compare the Biba model, the Clark-Wilson model and the Chinese Wall.

With Bell-LaPadula, users can create content only at or above their own security level (i.e. secret researchers can create secret or top-secret files but may not create public files; no write-down). Conversely, users can view content only at or below their own security level

(i.e. secret researchers can view public or secret files, but may not view top-secret files; no read-up).

Strong Property

The Strong Property is an alternative to the Property in which subjects may write to objects with only a matching security level. Thus, the write-up operation permitted in the usual Property is not present, only a write-to-same level operation. The Strong Property is usually discussed in the context of multilevel database management systems and is motivated by integrity concerns.

Tranquility principle

The tranquility principle of the Bell-LaPadula model states that the classification of a subject or object does not change while it is being referenced. There are two forms to the tranquility principle: the "principle of strong tranquility" states that security levels do not change during the normal operation of the system and the "principle of weak tranquility" states that security levels do not change in a way that violates the rules of a given security policy.

Another interpretation of the tranquility principles is that they both apply only to the period of time during which an operation involving an object or subject is occurring. That is, the strong tranquility principle means that an object's security level/label will not change during an operation (such as read or write); the weak tranquility principle means that an object's security level/label may change in a way that does not violate the security policy during an operation.

Reference(s) used for this question: http://en.wikipedia.org/wiki/Biba_Model

http://en.wikipedia.org/wiki/Mandatory_access_control http://en.wikipedia.org/wiki/Discretionary_access_control http://en.wikipedia.org/wiki/Clark-Wilson_model

http://en.wikipedia.org/wiki/Brewer_and_Nash_model

NEW QUESTION 10

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

Answer: A

Explanation:

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

NEW QUESTION 10

- (Topic 1)

Which of the following access control models is based on sensitivity labels?

- A. Discretionary access control
- B. Mandatory access control
- C. Rule-based access control
- D. Role-based access control

Answer: B

Explanation:

Access decisions are made based on the clearance of the subject and the sensitivity label of the object.

Example: Eve has a "Secret" security clearance and is able to access the "Mugwump Missile Design Profile" because its sensitivity label is "Secret." She is denied access to the "Presidential Toilet Tissue Formula" because its sensitivity label is "Top Secret."

The other answers are not correct because:

Discretionary Access Control is incorrect because in DAC access to data is determined by the data owner. For example, Joe owns the "Secret Chili Recipe" and grants read access to Charles.

Role Based Access Control is incorrect because in RBAC access decisions are made based on the role held by the user. For example, Jane has the role "Auditor" and that role includes read permission on the "System Audit Log."

Rule Based Access Control is incorrect because it is a form of MAC. A good example would be a Firewall where rules are defined and apply to anyone connecting through the firewall.

References:

All in One third edition, page 164. Official ISC2 Guide page 187.

NEW QUESTION 13

- (Topic 1)

Logical or technical controls involve the restriction of access to systems and the protection of information. Which of the following statements pertaining to these types of controls is correct?

- A. Examples of these types of controls include policies and procedures, securityawareness training, background checks, work habit checks but do not include a review of vacation history, and also do not include increased supervision.
- B. Examples of these types of controls do not include encryption, smart cards, access lists, and transmission protocols.
- C. Examples of these types of controls are encryption, smart cards, access lists, and transmission protocols.
- D. Examples of these types of controls include policies and procedures, security awareness training, background checks, work habit checks, a review of vacation history, and increased supervision.

Answer: C

Explanation:

Logical or technical controls involve the restriction of access to systems and the protection of information. Examples of these types of controls are encryption, smart cards, access lists, and transmission protocols.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 15

- (Topic 1)

What does the Clark-Wilson security model focus on?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

Answer: B

Explanation:

The Clark-Wilson model addresses integrity. It incorporates mechanisms to enforce internal and external consistency, a separation of duty, and a mandatory integrity policy.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 205).

NEW QUESTION 18

- (Topic 1)

Which access control model provides upper and lower bounds of access capabilities for a subject?

- A. Role-based access control
- B. Lattice-based access control
- C. Biba access control
- D. Content-dependent access control

Answer: B

Explanation:

In the lattice model, users are assigned security clearances and the data is classified. Access decisions are made based on the clearance of the user and the classification of the object. Lattice-based access control is an essential ingredient of formal security models such as Bell-LaPadula, Biba, Chinese Wall, etc. The bounds concept comes from the formal definition of a lattice as a "partially ordered set for which every pair of elements has a greatest lower bound and a least upper bound." To see the application, consider a file classified as "SECRET" and a user Joe with a security clearance of "TOP SECRET." Under Bell-LaPadula, Joe's "least upper bound" access to the file is "READ" and his least lower bound is "NO WRITE" (star property).

Role-based access control is incorrect. Under RBAC, the access is controlled by the permissions assigned to a role and the specific role assigned to the user.

Biba access control is incorrect. The Biba integrity model is based on a lattice structure but the context of the question disqualifies it as the best answer.

Content-dependent access control is incorrect. In content dependent access control, the actual content of the information determines access as enforced by the arbiter.

References:

CBK, pp. 324-325.

AI03, pp. 291-293. See particularly Figure 5-19 on p. 293 for an illustration of bounds in action.

NEW QUESTION 22

- (Topic 1)

Which of the following statements pertaining to biometrics is FALSE?

- A. User can be authenticated based on behavior.
- B. User can be authenticated based on unique physical attributes.
- C. User can be authenticated by what he knows.
- D. A biometric system's accuracy is determined by its crossover error rate (CER).

Answer: C

Explanation:

As this is not a characteristic of Biometrics this is the right choice for this question. This is one of the three basic ways authentication can be performed and it is not related to Biometrics. Example of something you know would be a password or PIN for example.

Please make a note of the negative 'FALSE' within the question. This question may seem tricky to some of you but you would be amazed at how many people cannot deal with negative questions. There will be a few negative questions within the real exam, just like this one the keyword NOT or FALSE will be in Uppercase to clearly indicate that it is negative.

Biometrics verifies an individual's identity by analyzing a unique personal attribute or behavior, which is one of the most effective and accurate methods of performing authentication (one to one matching) or identification (a one to many matching).

A biometric system scans an attribute or behavior of a person and compares it to a template store within an authentication server database, such template would be created in an earlier enrollment process. Because this system inspects the grooves of a person's fingerprint, the pattern of someone's retina, or the pitches of someone's voice, it has to be extremely sensitive.

The system must perform accurate and repeatable measurements of anatomical or physiological characteristics. This type of sensitivity can easily cause false positives or false negatives. The system must be calibrated so that these false positives and false negatives occur infrequently and the results are as accurate as possible.

There are two types of failures in biometric identification:

False Rejection also called False Rejection Rate (FRR) — The system fails to recognize a legitimate user. While it could be argued that this has the effect of keeping the protected area extra secure, it is an intolerable frustration to legitimate users who are refused access because the scanner does not recognize them.

False Acceptance or False Acceptance Rate (FAR) — This is an erroneous recognition, either by confusing one user with another or by accepting an imposter as a legitimate user.

Physiological Examples:

Unique Physical Attributes:

Fingerprint (Most commonly accepted) Hand Geometry

Retina Scan (Most accurate but most intrusive) Iris Scan

Vascular Scan Behavioral Examples:

Repeated Actions Keystroke Dynamics

(Dwell time (the time a key is pressed) and Flight time (the time between "key up" and the next "key down").

Signature Dynamics

(Stroke and pressure points)

EXAM TIP:

Retina scan devices are the most accurate but also the most invasive biometrics system available today. The continuity of the retinal pattern throughout life and the difficulty in fooling such a device also make it a great long-term, high-security option. Unfortunately, the cost of the proprietary hardware as well as the stigma of users thinking it is potentially harmful to the eye makes retinal scanning a bad fit for most situations.

Remember for the exam that fingerprints are the most commonly accepted type of biometrics system.

The other answers are incorrect:

'Users can be authenticated based on behavior.' is incorrect as this choice is TRUE as it pertains to BIOMETRICS.

Biometrics systems make use of unique physical characteristics or behavior of users.

'User can be authenticated based on unique physical attributes.' is also incorrect as this choice is also TRUE as it pertains to BIOMETRICS. Biometrics systems make use of unique physical characteristics or behavior of users.

'A biometric system's accuracy is determined by its crossover error rate (CER)' is also incorrect as this is TRUE as it also pertains to BIOMETRICS. The CER is the point at which the false rejection rates and the false acceptance rates are equal. The smaller the value of the CER, the more accurate the system.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 25353-25356). Auerbach Publications. Kindle Edition.

and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 25297-25303). Auerbach

Publications. Kindle Edition.

NEW QUESTION 23

- (Topic 1)

Which of the following is most relevant to determining the maximum effective cost of access control?

- A. the value of information that is protected
- B. management's perceptions regarding data importance
- C. budget planning related to base versus incremental spending.
- D. the cost to replace lost data

Answer: A

Explanation:

The cost of access control must be commensurate with the value of the information that is being protected.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 49.

NEW QUESTION 27

- (Topic 1)

Which of the following describes the major disadvantage of many Single Sign-On (SSO) implementations?

- A. Once an individual obtains access to the system through the initial log-on, they have access to all resources within the environment that the account has access to.
- B. The initial logon process is cumbersome to discourage potential intruders.
- C. Once a user obtains access to the system through the initial log-on, they only need to logon to some applications.
- D. Once a user obtains access to the system through the initial log-on, he has to logout from all other systems

Answer: A

Explanation:

Single Sign-On is a distributed Access Control methodology where an individual only has to authenticate once and would have access to all primary and secondary network domains. The individual would not be required to re-authenticate when they needed additional resources. The security issue that this creates is if a fraudster is able to compromise those credential they too would have access to all the resources that account has access to.

All the other answers are incorrect as they are distractors.

NEW QUESTION 29

- (Topic 1)

Which access control model enables the OWNER of the resource to specify what subjects can access specific resources based on their identity?

- A. Discretionary Access Control
- B. Mandatory Access Control
- C. Sensitive Access Control
- D. Role-based Access Control

Answer: A

Explanation:

Data owners decide who has access to resources based only on the identity of the person accessing the resource.

The following answers are incorrect :

Mandatory Access Control : users and data owners do not have as much freedom to determine who can access files. The operating system makes the final decision and can override the users' wishes and access decisions are based on security labels.

Sensitive Access Control : There is no such access control in the context of the above question.

Role-based Access Control : uses a centrally administered set of controls to determine how subjects and objects interact , also called as non discretionary access control.

In a mandatory access control (MAC) model, users and data owners do not have as much freedom to determine who can access files. The operating system makes the final decision and can override the users' wishes. This model is much more structured and strict and is based on a security label system. Users are given a security clearance (secret, top secret, confidential, and so on), and data is classified in the same way. The clearance and classification data is stored in the security labels, which are bound to the specific subjects and objects. When the system makes a decision about fulfilling a request to access an object, it is based on the clearance of the subject, the classification of the object, and the security policy of the system. The rules for how subjects access objects are made by the security officer, configured by the administrator, enforced by the operating system, and supported by security technologies

Reference : Shon Harris , AIO v3 , Chapter-4 : Access Control , Page : 163-165

NEW QUESTION 30

- (Topic 1)

Which of the following would constitute the best example of a password to use for access to a system by a network administrator?

- A. holiday
- B. Christmas12
- C. Jenny
- D. GyN19Za!

Answer: D

Explanation:

GyN19Za! would be the best answer because it contains a mixture of upper and lower case characters, alphabetic and numeric characters, and a special character making it less vulnerable to password attacks.

All of the other answers are incorrect because they are vulnerable to brute force or dictionary attacks. Passwords should not be common words or names. The addition of a number to the end of a common word only marginally strengthens it because a common password attack would also check combinations of words: Christmas23 Christmas123 etc...

NEW QUESTION 34

- (Topic 1)

Pin, Password, Passphrases, Tokens, smart cards, and biometric devices are all items that can be used for Authentication. When one of these item listed above in conjunction with a second factor to validate authentication, it provides robust authentication of the individual by practicing which of the following?

- A. Multi-party authentication
- B. Two-factor authentication
- C. Mandatory authentication
- D. Discretionary authentication

Answer: B

Explanation:

Once an identity is established it must be authenticated. There exist numerous technologies and implementation of authentication methods however they almost all fall under three major areas.

There are three fundamental types of authentication: Authentication by knowledge—something a person knows

Authentication by possession—something a person has

Authentication by characteristic—something a person is Logical controls related to these types are called “factors.”

Something you know can be a password or PIN, something you have can be a token fob or smart card, and something you are is usually some form of biometrics.

Single-factor authentication is the employment of one of these factors, two-factor authentication is using two of the three factors, and three-factor authentication is the combination of all three factors.

The general term for the use of more than one factor during authentication is multifactor authentication or strong authentication.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 2367-2379). Auerbach Publications. Kindle Edition.

NEW QUESTION 36

- (Topic 1)

The end result of implementing the principle of least privilege means which of the following?

- A. Users would get access to only the info for which they have a need to know
- B. Users can access all systems.
- C. Users get new privileges added when they change positions.
- D. Authorization creep.

Answer: A

Explanation:

The principle of least privilege refers to allowing users to have only the access they need and not anything more. Thus, certain users may have no need to access any of the files on specific systems.

The following answers are incorrect:

Users can access all systems. Although the principle of least privilege limits what access and systems users have authorization to, not all users would have a need to know to access all of the systems. The best answer is still Users would get access to only the info for which they have a need to know as some of the users may not have a need to access a system.

Users get new privileges when they change positions. Although true that a user may indeed require new privileges, this is not a given fact and in actuality a user may require less privileges for a new position. The principle of least privilege would require that the rights required for the position be closely evaluated and where possible rights revoked.

Authorization creep. Authorization creep occurs when users are given additional rights with new positions and responsibilities. The principle of least privilege should actually prevent authorization creep.

The following reference(s) were/was used to create this question: ISC2 OIG 2007 p.101,123

Shon Harris AIO v3 p148, 902-903

NEW QUESTION 37

- (Topic 1)

RADIUS incorporates which of the following services?

- A. Authentication server and PIN codes.
- B. Authentication of clients and static passwords generation.
- C. Authentication of clients and dynamic passwords generation.
- D. Authentication server as well as support for Static and Dynamic passwords.

Answer: D

Explanation:

A Network Access Server (NAS) operates as a client of RADIUS. The client is responsible for passing user information to designated RADIUS servers, and then acting on the response which is returned.

RADIUS servers are responsible for receiving user connection requests, authenticating the user, and then returning all configuration information necessary for the client to deliver service to the user.

RADIUS authentication is based on provisions of simple username/password credentials.

These credentials are encrypted

by the client using a shared secret between the client and the RADIUS server. OIG 2007, Page 513

RADIUS incorporates an authentication server and can make uses of both dynamic and static passwords.

Since it uses the PAP and CHAP protocols, it also includes static passwords.

RADIUS is an Internet protocol. RADIUS carries authentication, authorization, and configuration information between a Network Access Server and a shared Authentication Server. RADIUS features and functions are described primarily in the IETF (International Engineering Task Force) document RFC2138.

The term " RADIUS" is an acronym which stands for Remote Authentication Dial In User Service.

The main advantage to using a RADIUS approach to authentication is that it can provide a stronger form of authentication. RADIUS is capable of using a strong, two-factor form of authentication, in which users need to possess both a user ID and a hardware or software token to gain access.

Token-based schemes use dynamic passwords. Every minute or so, the token generates a unique 4-, 6- or 8-digit access number that is synchronized with the security server. To gain entry into the system, the user must generate both this one-time number and provide his or her user ID and password.

Although protocols such as RADIUS cannot protect against theft of an authenticated session via some realtime attacks, such as wiretapping, using unique, unpredictable authentication requests can protect against a wide range of active attacks.

RADIUS: Key Features and Benefits Features Benefits

RADIUS supports dynamic passwords and challenge/response passwords. Improved system security due to the fact that passwords are not static.

It is much more difficult for a bogus host to spoof users into giving up their passwords or password-generation algorithms.

RADIUS allows the user to have a single user ID and password for all computers in a network.

Improved usability due to the fact that the user has to remember only one login combination.

RADIUS is able to:

Prevent RADIUS users from logging in via login (or ftp). Require them to log in via login (or ftp)

Require them to login to a specific network access server (NAS); Control access by time of day.

Provides very granular control over the types of logins allowed, on a per-user basis. The time-out interval for failing over from an unresponsive primary RADIUS server to a

backup RADIUS server is site-configurable.

RADIUS gives System Administrator more flexibility in managing which users can login from which hosts or devices.

Stratus Technology Product Brief <http://www.stratus.com/products/vos/openvos/radius.htm>

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Pages 43, 44.

Also check: MILLER, Lawrence & GREGORY, Peter, CISSP for Dummies, 2002, Wiley Publishing, Inc., pages 45-46.

NEW QUESTION 40

- (Topic 1)

Identification and authentication are the keystones of most access control systems. Identification establishes:

- A. User accountability for the actions on the system.
- B. Top management accountability for the actions on the system.
- C. EDP department accountability for the actions of users on the system.
- D. Authentication for actions on the system

Answer: A

Explanation:

Identification and authentication are the keystones of most access control systems. Identification establishes user accountability for the actions on the system.

The control environment can be established to log activity regarding the identification, authentication, authorization, and use of privileges on a system. This can be used to detect the occurrence of errors, the attempts to perform an unauthorized action, or to validate when provided credentials were exercised. The logging system as a detective device provides evidence of actions (both successful and unsuccessful) and tasks that were executed by authorized users.

Once a person has been identified through the user ID or a similar value, she must be authenticated, which means she must prove she is who she says she is.

Three general factors can be used for authentication: something a person knows, something a person has, and something a person is. They are also commonly called authentication by knowledge, authentication by ownership, and authentication by characteristic.

For a user to be able to access a resource, he first must prove he is who he claims to be, has the necessary credentials, and has been given the necessary rights or privileges to perform the actions he is requesting. Once these steps are completed successfully, the user can access and use network resources; however, it is necessary to track the user's activities and enforce accountability for his actions.

Identification describes a method of ensuring that a subject (user, program, or process) is the entity it claims to be. Identification can be provided with the use of a username or account number. To be properly authenticated, the subject is usually required to provide a second piece to the credential set. This piece could be a password, passphrase,

cryptographic key, personal identification number (PIN), anatomical attribute, or token.

These two credential items are compared to information that has been previously stored for this subject. If these credentials match the stored information, the subject is authenticated. But we are not done yet. Once the subject provides its credentials and is properly identified, the system it is trying to access needs to determine if this subject has been given the necessary rights and privileges to carry out the requested actions. The system will look at some type of access control matrix or compare security labels to verify that this subject may indeed access the requested resource and perform the actions it is attempting. If the system determines that the subject may access the resource, it authorizes the subject.

Although identification, authentication, authorization, and accountability have close and complementary definitions, each has distinct functions that fulfill a specific requirement in the process of access control. A user may be properly identified and authenticated to the network, but he may not have the authorization to access the files on the file server. On the other hand, a user may be authorized to access the files on the file server, but until she is properly identified and authenticated, those resources are out of reach.

Reference(s) used for this question:

Schneider, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition: Access Control ((ISC)2 Press) (Kindle Locations 889-892). Auerbach Publications. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3875-3878). McGraw-Hill. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3833-3848). McGraw-Hill. Kindle Edition.

and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 45

- (Topic 1)

Which of the following forms of authentication would most likely apply a digital signature algorithm to every bit of data that is sent from the claimant to the verifier?

- A. Dynamic authentication
- B. Continuous authentication
- C. Encrypted authentication
- D. Robust authentication

Answer: B

Explanation:

Continuous authentication is a type of authentication that provides protection against impostors who can see, alter, and insert information passed between the claimant and verifier even after the claimant/verifier authentication is complete. These are typically referred to as active attacks, since they assume that the imposter can actively influence the connection between claimant and verifier. One way to provide this form of authentication is to apply a digital signature algorithm to every bit of data that is sent from the claimant to the verifier. There are other combinations of cryptography that can provide this form of authentication but current strategies rely on applying some type of cryptography to every bit

of data sent. Otherwise, any unprotected bit would be suspect. Robust authentication relies on dynamic authentication data that changes with each authenticated session between a claimant and a verifier, but does not provide protection against active attacks. Encrypted authentication is a distracter.

Source: GUTTMAN, Barbara & BAGWILL, Robert, NIST Special Publication 800-xx, Internet Security Policy: A Technical Guide, Draft Version, May 25, 2000 (page 34).

NEW QUESTION 50

- (Topic 1)

How would nonrepudiation be best classified as?

- A. A preventive control
- B. A logical control
- C. A corrective control
- D. A compensating control

Answer: A

Explanation:

Systems accountability depends on the ability to ensure that senders cannot deny sending information and that receivers cannot deny receiving it. Because the mechanisms implemented in nonrepudiation prevent the ability to successfully repudiate an action, it can be considered as a preventive control.

Source: STONEBURNER, Gary, NIST Special Publication 800-33: Underlying Technical Models for Information Technology Security, National Institute of Standards and Technology, December 2001, page 7.

NEW QUESTION 52

- (Topic 1)

Which of the following floors would be most appropriate to locate information processing facilities in a 6-stories building?

- A. Basement
- B. Ground floor
- C. Third floor
- D. Sixth floor

Answer: C

Explanation:

Your data center should be located in the middle of the facility or the core of a building to provide protection from natural disasters or bombs and provide easier access to emergency crewmembers if necessary. By being at the core of the facility the external wall would act as a secondary layer of protection as well. Information processing facilities should not be located on the top floors of buildings in case of a fire or flooding coming from the roof. Many crimes and theft have also been conducted by simply cutting a large hole on the roof.

They should not be in the basement because of flooding where water has a natural tendency to flow down :-). Even a little amount of water would affect your operation.

considering the quantity of electrical cabling sitting directly on the cement floor under your raised floor.

The data center should not be located on the first floor due to the presence of the main entrance where people are coming in and out. You have a lot of high traffic areas such as the elevators, the loading docks, cafeteria, coffee shop, etc.. Really a bad location for a data center.

So it was easy to come up with the answer by using the process of elimination where the top, the bottom, and the basement are all bad choices. That left you with only one possible answer which is the third floor.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 5th Edition, Page 425.

NEW QUESTION 55

- (Topic 1)

Which of the following biometric parameters are better suited for authentication use over a long period of time?

- A. Iris pattern
- B. Voice pattern
- C. Signature dynamics
- D. Retina pattern

Answer: A

Explanation:

The iris pattern is considered lifelong. Unique features of the iris are: freckles, rings, rifts, pits, striations, fibers, filaments, furrows, vasculature and coronas. Voice, signature and retina patterns are more likely to change over time, thus are not as suitable for authentication over a long period of time without needing re-enrollment. Source: FERREL, Robert G, Questions and Answers for the CISSP Exam, domain 1 (derived from the Information Security Management Handbook, 4th Ed., by Tipton & Krause).

NEW QUESTION 60

- (Topic 1)

Almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in a biometric authentication system, the system becomes increasingly selective and has the possibility of generating:

- A. Lower False Rejection Rate (FRR)
- B. Higher False Rejection Rate (FRR)
- C. Higher False Acceptance Rate (FAR)
- D. It will not affect either FAR or FRR

Answer: B

Explanation:

Almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in a biometric authentication system, the system becomes increasingly selective and has a higher False Rejection Rate (FRR).

Conversely, if the sensitivity is decreased, the False Acceptance Rate (FAR) will increase. Thus, to have a valid measure of the system performance, the Cross Over Error (CER) rate is used. The Crossover Error Rate (CER) is the point at which the false rejection rates and the false acceptance rates are equal. The lower the value of the CER, the more accurate the system.

There are three categories of biometric accuracy measurement (all represented as percentages):

False Reject Rate (a Type I Error): When authorized users are falsely rejected as unidentified or unverified.

False Accept Rate (a Type II Error): When unauthorized persons or imposters are falsely accepted as authentic.

Crossover Error Rate (CER): The point at which the false rejection rates and the false acceptance rates are equal. The smaller the value of the CER, the more accurate the system.

NOTE:

Within the ISC2 book they make use of the term Accept or Acceptance and also Reject or Rejection when referring to the type of errors within biometrics. Below we make use of Acceptance and Rejection throughout the text for consistency. However, on the real exam you could see either of the terms.

Performance of biometrics

Different metrics can be used to rate the performance of a biometric factor, solution or application. The most common performance metrics are the False Acceptance Rate FAR and the False Rejection Rate FRR.

When using a biometric application for the first time the user needs to enroll to the system. The system requests fingerprints, a voice recording or another biometric factor from the

operator, this input is registered in the database as a template which is linked internally to a user ID. The next time when the user wants to authenticate or identify himself, the biometric input provided by the user is compared to the template(s) in the database by a matching algorithm which responds with acceptance (match) or rejection (no match).

FAR and FRR

The FAR or False Acceptance rate is the probability that the system incorrectly authorizes a non-authorized person, due to incorrectly matching the biometric input with a valid template. The FAR is normally expressed as a percentage, following the FAR definition this is the percentage of invalid inputs which are incorrectly accepted.

The FRR or False Rejection Rate is the probability that the system incorrectly rejects access to an authorized person, due to failing to match the biometric input provided by the user with a stored template. The FRR is normally expressed as a percentage, following the FRR definition this is the percentage of valid inputs which are incorrectly rejected.

FAR and FRR are very much dependent on the biometric factor that is used and on the technical implementation of the biometric solution. Furthermore the FRR is strongly person dependent, a personal FRR can be determined for each individual.

Take this into account when determining the FRR of a biometric solution, one person is insufficient to establish an overall FRR for a solution. Also FRR might increase due to environmental conditions or incorrect use, for example when using dirty fingers on a fingerprint reader. Mostly the FRR lowers when a user gains more experience in how to use the biometric device or software.


FAR and FRR are key metrics for biometric solutions, some biometric devices or software even allow to tune them so that the system more quickly matches or rejects. Both FRR and FAR are important, but for most applications one of them is considered most important. Two examples to illustrate this:

When biometrics are used for logical or physical access control, the objective of the application is to disallow access to unauthorized individuals under all circumstances. It is clear that a very low FAR is needed for such an application, even if it comes at the price of a higher FRR.

When surveillance cameras are used to screen a crowd of people for missing children, the objective of the application is to identify any missing children that come up on the screen. When the identification of those children is automated using a face recognition software, this software has to be set up with a low FRR. As such a higher number of matches will be false positives, but these can be reviewed quickly by surveillance personnel.

False Acceptance Rate is also called False Match Rate, and False Rejection Rate is sometimes referred to as False Non-Match Rate.

crossover error rate

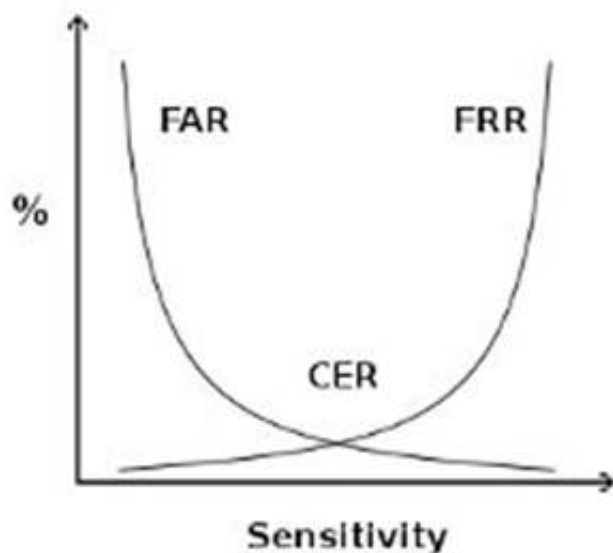

crossover error rate

Above see a graphical representation of FAR and FRR errors on a graph, indicating the CER

CER

The Crossover Error Rate or CER is illustrated on the graph above. It is the rate where both FAR and FRR are equal.

The matching algorithm in a biometric software or device uses a (configurable) threshold which determines how close to a template the input must be for it to be considered a match. This threshold value is in some cases referred to as sensitivity, it is marked on the X axis of the plot. When you reduce this threshold there will be more false acceptance errors (higher FAR) and less false rejection errors (lower FRR), a higher threshold will lead to lower FAR and higher FRR.

Speed

Most manufacturers of biometric devices and softwares can give clear numbers on the time it takes to enroll as well on the time for an individual to be authenticated or identified using their application. If speed is important then take your time to consider this, 5 seconds might seem a short time on paper or when testing a device but if hundreds of people will use the device multiple times a day the cumulative loss of time might be significant.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 2723-2731). Auerbach Publications. Kindle Edition.

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

and

http://www.biometric-solutions.com/index.php?story=performance_biometrics

NEW QUESTION 63

- (Topic 1)

What are the components of an object's sensitivity label?

A. A Classification Set and a single Compartment.

- B. A single classification and a single compartment.
- C. A Classification Set and user credentials.
- D. A single classification and a Compartment Set.

Answer: D

Explanation:

Both are the components of a sensitivity label. The following are incorrect:

A Classification Set and a single Compartment. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not a "single compartment" but a Compartment Set.

A single classification and a single compartment. Is incorrect because while there only is one classification, it is not a "single compartment" but a Compartment Set.

A Classification Set and user credentials. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not "user credential" but a Compartment Set. The user would have their own sensitivity label.

NEW QUESTION 66

- (Topic 1)

Which of the following is true about Kerberos?

- A. It utilizes public key cryptography.
- B. It encrypts data after a ticket is granted, but passwords are exchanged in plain text.
- C. It depends upon symmetric ciphers.
- D. It is a second party authentication system.

Answer: C

Explanation:

Kerberos depends on secret keys (symmetric ciphers). Kerberos is a third party authentication protocol. It was designed and developed in the mid 1980's by MIT. It is considered open source but is copyrighted and owned by MIT. It relies on the user's secret keys. The password is used to encrypt and decrypt the keys.

The following answers are incorrect:

It utilizes public key cryptography. Is incorrect because Kerberos depends on secret keys (symmetric ciphers).

It encrypts data after a ticket is granted, but passwords are exchanged in plain text. Is incorrect because the passwords are not exchanged but used for encryption and decryption of the keys.

It is a second party authentication system. Is incorrect because Kerberos is a third party authentication system, you authenticate to the third party (Kerberos) and not the system you are accessing.

References:

MIT <http://web.mit.edu/kerberos/>

Wikipedi http://en.wikipedia.org/wiki/Kerberos_%28protocol%29

OIG CBK Access Control (pages 181 - 184) AIOv3 Access Control (pages 151 - 155)

NEW QUESTION 69

- (Topic 1)

Which of the following remote access authentication systems is the most robust?

- A. TACACS+
- B. RADIUS
- C. PAP
- D. TACACS

Answer: A

Explanation:

TACACS+ is a proprietary Cisco enhancement to TACACS and is more robust than RADIUS. PAP is not a remote access authentication system but a remote node security protocol.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 122).

NEW QUESTION 70

- (Topic 1)

Which of the following is not a two-factor authentication mechanism?

- A. Something you have and something you know.
- B. Something you do and a password.
- C. A smartcard and something you are.
- D. Something you know and a password.

Answer: D

Explanation:

Something you know and a password fits within only one of the three ways authentication could be done. A password is an example of something you know, thereby something you know and a password does not constitute a two-factor authentication as both are in the same category of factors.

A two-factor (strong) authentication relies on two different kinds of authentication factors out of a list of three possible choice:

something you know (e.g. a PIN or password),

something you have (e.g. a smart card, token, magnetic card),

something you are is mostly Biometrics (e.g. a fingerprint) or something you do (e.g. signature dynamics).

TIP FROM CLEMENT:

On the real exam you can expect to see synonyms and sometimes sub-categories under the main categories. People are familiar with Pin, Passphrase, Password as subset of Something you know.

However, when people see choices such as Something you do or Something you are they immediately get confused and they do not think of them as subset of Biometrics where you have Biometric implementation based on behavior and physiological attributes. So something you do falls under the Something you are

category as a subset.

Something your do would be signing your name or typing text on your keyboard for example.

Strong authentication is simply when you make use of two factors that are within two different categories.

Reference(s) used for this question:

Shon Harris, CISSP All In One, Fifth Edition, pages 158-159

NEW QUESTION 72

- (Topic 1)

Which of the following is not a logical control when implementing logical access security?

- A. access profiles.
- B. userids.
- C. employee badges.
- D. passwords.

Answer: C

Explanation:

Employee badges are considered Physical so would not be a logical control. The following answers are incorrect:

userids. Is incorrect because userids are a type of logical control.

access profiles. Is incorrect because access profiles are a type of logical control. passwords. Is incorrect because passwords are a type of logical control.

NEW QUESTION 77

- (Topic 1)

What does the simple integrity axiom mean in the Biba model?

- A. No write down
- B. No read down
- C. No read up
- D. No write up

Answer: B

Explanation:

The simple integrity axiom of the Biba access control model states that a subject at one level of integrity is not permitted to observe an object of a lower integrity (no read down).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 205).

NEW QUESTION 80

- (Topic 1)

Which of the following is NOT a compensating measure for access violations?

- A. Backups
- B. Business continuity planning
- C. Insurance
- D. Security awareness

Answer: D

Explanation:

Security awareness is a preventive measure, not a compensating measure for access violations.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 50).

NEW QUESTION 85

- (Topic 1)

What physical characteristic does a retinal scan biometric device measure?

- A. The amount of light reaching the retina
- B. The amount of light reflected by the retina
- C. The pattern of light receptors at the back of the eye
- D. The pattern of blood vessels at the back of the eye

Answer: D

Explanation:

The retina, a thin nerve (1/50th of an inch) on the back of the eye, is the part of the eye which senses light and transmits impulses through the optic nerve to the brain - the equivalent of film in a camera. Blood vessels used for biometric identification are located along the neural retina, the outermost of retina's four cell layers.

The following answers are incorrect:

The amount of light reaching the retina The amount of light reaching the retina is not used in the biometric scan of the retina.

The amount of light reflected by the retina The amount of light reflected by the retina is not used in the biometric scan of the retina.

The pattern of light receptors at the back of the eye This is a distractor The following reference(s) were/was used to create this question: Reference: Retina Scan Technology.

ISC2 Official Guide to the CBK, 2007 (Page 161)

NEW QUESTION 86

- (Topic 1)

Which of the following is the FIRST step in protecting data's confidentiality?

- A. Install a firewall
- B. Implement encryption
- C. Identify which information is sensitive
- D. Review all user access rights

Answer: C

Explanation:

In order to protect the confidentiality of the data. The following answers are incorrect because :

Install a firewall is incorrect as this would come after the information has been identified for sensitivity levels.

Implement encryption is also incorrect as this is one of the mechanisms to protect the data once it has been identified.

Review all user access rights is also incorrect as this is also a protection mechanism for the identified information.

Reference : Shon Harris AIO v3 , Chapter-4 : Access Control , Page : 126

NEW QUESTION 87

- (Topic 1)

Which of the following statements pertaining to Kerberos is TRUE?

- A. Kerberos does not address availability
- B. Kerberos does not address integrity
- C. Kerberos does not make use of Symmetric Keys
- D. Kerberos cannot address confidentiality of information

Answer: A

Explanation:

The question was asking for a TRUE statement and the only correct statement is "Kerberos does not address availability".

Kerberos addresses the confidentiality and integrity of information. It does not directly address availability.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2:

Access control

systems (page 42).

NEW QUESTION 89

- (Topic 1)

The controls that usually require a human to evaluate the input from sensors or cameras to determine if a real threat exists are associated with:

- A. Preventive/physical
- B. Detective/technical
- C. Detective/physical
- D. Detective/administrative

Answer: C

Explanation:

Detective/physical controls usually require a human to evaluate the input from sensors or cameras to determine if a real threat exists.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 93

- (Topic 1)

Which of the following is NOT part of the Kerberos authentication protocol?

- A. Symmetric key cryptography
- B. Authentication service (AS)
- C. Principals
- D. Public Key

Answer: D

Explanation:

There is no such component within kerberos environment. Kerberos uses only symmetric encryption and does not make use of any public key component.

The other answers are incorrect because :

Symmetric key cryptography is a part of Kerberos as the KDC holds all the users' and services' secret keys.

Authentication service (AS) : KDC (Key Distribution Center) provides an authentication service

Principals : Key Distribution Center provides services to principals , which can be users , applications or network services.

References: Shon Harris , AIO v3 , Chapter - 4: Access Control , Pages : 152-155.

NEW QUESTION 98

- (Topic 1)

What is one disadvantage of content-dependent protection of information?

- A. It increases processing overhead.
- B. It requires additional password entry.
- C. It exposes the system to data locking.
- D. It limits the user's individual address space.

Answer: A

Explanation:

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

NEW QUESTION 103

- (Topic 1)

The National Institute of Standards and Technology (NIST) standard pertaining to perimeter protection states that critical areas should be illuminated up to?

- A. Illuminated at nine feet high with at least three foot-candles
- B. Illuminated at eight feet high with at least two foot-candles
- C. Illuminated at eight feet high with at least three foot-candles
- D. Illuminated at nine feet high with at least two foot-candles

Answer: B

Explanation:

The National Institute of Standards and Technology (NIST) standard pertaining to perimeter protection states that critical areas should be illuminated eight feet high with at least two foot-candles.

It can also be referred to as illuminating to a height of eight feet, with a BRIGHTNESS of two foot-candles.

One footcandle 10.764 lux. The footcandle (or lumen per square foot) is a non-SI unit of illuminance. Like the BTU, it is obsolete but it is still in fairly common use in the United States, particularly in construction-related engineering and in building codes. Because lux and footcandles are different units of the same quantity, it is perfectly valid to convert footcandles to lux and vice versa.

The name "footcandle" conveys "the illuminance cast on a surface by a one-candela source one foot away." As natural as this sounds, this style of name is now frowned upon, because the dimensional formula for the unit is not foot • candela, but lumens per square foot.

Some sources do however note that the "lux" can be thought of as a "metre-candle" (i.e. the illuminance cast on a surface by a one-candela source one meter away). A source that is farther away casts less illumination than one that is close, so one lux is less illuminance than one footcandle. Since illuminance follows the inverse-square law, and since one foot = 0.3048 m, one lux = 0.30482 footcandle 1/10.764 footcandle.

TIPS FROM CLEMENT:

Illuminance (light level) – The amount of light, measured in foot-candles (US unit), that falls on a surface, either horizontal or vertical.

Parking lots lighting needs to be an average of 2 foot candles; uniformity of not more than 3:1, no area less than 1 fc.

All illuminance measurements are to be made on the horizontal plane with a certified light meter calibrated to NIST standards using traceable light sources.

The CISSP Exam Cram 2 from Michael Gregg says: Lighting is a commonly used form of perimeter protection.

Some studies have found that up to 80% of criminal acts at businesses and shopping centers happen in adjacent parking lots. Therefore, it's easy to see why lighting can be such an important concern.

Outside lighting discourages prowlers and thieves.

The National Institute of Standards and Technologies (NIST) states that, for effective perimeter control, buildings should be illuminated 8 feet high, with 2-foot candle power.

Reference used for this question:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 325.

and

Shon's AIO v5 pg 459 and

<http://en.wikipedia.org/wiki/Foot-candle>

NEW QUESTION 105

- (Topic 1)

In the context of access control, locks, gates, guards are examples of which of the following?

- A. Administrative controls
- B. Technical controls
- C. Physical controls
- D. Logical controls

Answer: C

Explanation:

Administrative, technical and physical controls are categories of access control mechanisms.

Logical and Technical controls are synonymous. So both of them could be eliminated as possible choices.

Physical Controls: These are controls to protect the organization's people and physical environment, such as locks, gates, and guards. Physical controls may be called "operational controls" in some contexts.

Physical security covers a broad spectrum of controls to protect the physical assets (primarily the people) in an organization. Physical Controls are sometimes referred to as "operational" controls in some risk management frameworks. These controls range from doors, locks, and windows to environment controls, construction standards, and guards. Typically, physical security is based on the notion of establishing security zones or concentric areas within a facility that require increased security as you get closer to the

valuable assets inside the facility. Security zones are the physical representation of the defense-in-depth principle discussed earlier in this chapter. Typically, security zones are associated with rooms, offices, floors, or smaller elements, such as a cabinet or storage locker. The design of the physical security controls within the facility must take into account the protection of the asset as well as the individuals working in that area.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 1301-1303). Auerbach Publications. Kindle Edition.

and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 1312-1318). Auerbach Publications. Kindle Edition.

NEW QUESTION 107

- (Topic 1)

What is called the percentage of valid subjects that are falsely rejected by a Biometric Authentication system?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error

- C. Crossover Error Rate (CER)
- D. True Rejection Rate (TRR) or Type III Error

Answer: A

Explanation:

The percentage of valid subjects that are falsely rejected is called the False Rejection Rate (FRR) or Type I Error.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 109

- (Topic 1)

Which of the following protection devices is used for spot protection within a few inches of the object, rather than for overall room security monitoring?

- A. Wave pattern motion detectors
- B. Capacitance detectors
- C. Field-powered devices
- D. Audio detectors

Answer: B

Explanation:

Capacitance detectors monitor an electrical field surrounding the object being monitored. They are used for spot protection within a few inches of the object, rather than for overall room security monitoring used by wave detectors. Penetration of this field changes the electrical capacitance of the field enough to generate and alarm. Wave pattern motion detectors generate a frequency wave pattern and send an alarm if the pattern is disturbed as it is reflected back to its receiver. Field-powered devices are a type of personnel access control devices. Audio detectors simply monitor a room for any abnormal sound wave generation and trigger an alarm.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 10: Physical security (page 344).

NEW QUESTION 113

- (Topic 1)

Which of the following division is defined in the TCSEC (Orange Book) as minimal protection?

- A. Division D
- B. Division C
- C. Division B
- D. Division A

Answer: A

Explanation:

The criteria are divided into four divisions: D, C, B, and A ordered in a hierarchical manner with the highest division (A) being reserved for systems providing the most comprehensive security.

Each division represents a major improvement in the overall confidence one can place in the system for the protection of sensitive information.

Within divisions C and B there are a number of subdivisions known as classes. The classes are also ordered in a hierarchical manner with systems representative of division C and lower classes of division B being characterized by the set of computer security mechanisms that they possess.

Assurance of correct and complete design and implementation for these systems is gained mostly through testing of the security- relevant portions of the system.

The security-relevant portions of a system are referred to throughout this document as the Trusted Computing Base (TCB).

Systems representative of higher classes in division B and division A derive their security attributes more from their design and implementation structure.

Increased assurance that the required features are operative, correct, and tamperproof under all circumstances is gained through progressively more rigorous analysis during the design process.

TCSEC provides a classification system that is divided into hierarchical divisions of assurance levels:

Division D - minimal security Division C - discretionary protection Division B - mandatory protection Division A - verified protection

Reference: page 358 AIO V.5 Shon Harris

also

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 197.

Also:

THE source for all TCSEC "level" questions: <http://csrc.nist.gov/publications/secpubs/rainbow/std001.txt>

NEW QUESTION 116

- (Topic 1)

How can an individual/person best be identified or authenticated to prevent local masquerading attacks?

- A. UserId and password
- B. Smart card and PIN code
- C. Two-factor authentication
- D. Biometrics

Answer: D

Explanation:

The only way to be truly positive in authenticating identity for access is to base the authentication on the physical attributes of the persons themselves (i.e., biometric

identification). Physical attributes cannot be shared, borrowed, or duplicated. They ensure that you do identify the person, however they are not perfect and they would have to be supplemented by another factor.

Some people are getting thrown off by the term Masquerade. In general, a masquerade is a disguise. In terms of communications security issues, a masquerade is a type of attack where the attacker pretends to be an authorized user of a system in order to gain access to it or to gain greater privileges than they are authorized for. A masquerade may be attempted through the use of stolen logon IDs and passwords, through finding security gaps in programs, or through bypassing the authentication mechanism. Spoofing is another term used to describe this type of attack as well.

A UserId only provides for identification.

A password is a weak authentication mechanism since passwords can be disclosed, shared, written down, and more.

A smart card can be stolen and its corresponding PIN code can be guessed by an intruder. A smartcard can be borrowed by a friend of yours and you would have no clue as to who is really logging in using that smart card.

Any form of two-factor authentication not involving biometrics cannot be as reliable as a biometric system to identify the person.

Biometric identifying verification systems control people. If the person with the correct hand, eye, face, signature, or voice is not present, the identification and verification cannot take place and the desired action (i.e., portal passage, data, or resource access) does not occur.

As has been demonstrated many times, adversaries and criminals obtain and successfully use access cards, even those that require the addition of a PIN. This is because these systems control only pieces of plastic (and sometimes information), rather than people. Real asset and resource protection can only be accomplished by people, not cards and information, because unauthorized persons can (and do) obtain the cards and information.

Further, life-cycle costs are significantly reduced because no card or PIN administration system or personnel are required. The authorized person does not lose physical characteristics (i.e., hands, face, eyes, signature, or voice), but cards and PINs are continuously lost, stolen, or forgotten. This is why card access systems require systems and people to administer, control, record, and issue (new) cards and PINs. Moreover, the cards are an expensive and recurring cost.

NOTE FROM CLEMENT:

This question has been generating lots of interest. The keyword in the question is: Individual (the person) and also the authenticated portion as well.

I totally agree with you that Two Factors or Strong Authentication would be the strongest means of authentication. However the question is not asking what is the strongest mean of authentication, it is asking what is the best way to identify the user (individual) behind the technology. When answering questions do not make assumptions to facts not presented in the question or answers.

Nothing can beat Biometrics in such case. You cannot lend your fingerprint and pin to someone else, you cannot borrow one of my eye balls to defeat the Iris or Retina scan. This is why it is the best method to authenticate the user.

I think the reference is playing with semantics and that makes it a bit confusing. I have improved the question to make it a lot clearer and I have also improve the explanations attached with the question.

The reference mentioned above refers to authenticating the identity for access. So the distinction is being made that there is identity and there is authentication. In the case of physical security the enrollment process is where the identity of the user would be validated and then the biometrics features provided by the user would authenticate the user on a one to one matching basis (for authentication) with the reference contained in the database of biometrics templates. In the case of system access, the user might have to provide a username, a pin, a passphrase, a smart card, and then provide his biometric attributes.

Biometric can also be used for Identification purpose where you do a one to many match. You take a facial scan of someone within an airport and you attempt to match it with a large database of known criminal and terrorists. This is how you could use biometric for Identification.

There are always THREE means of authentication, they are: Something you know (Type 1)

Something you have (Type 2)

Something you are (Type 3)

Reference(s) used for this question:

TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition (volume 1) , 2000, CRC Press, Chapter 1, Biometric Identification (page 7).

and

Search Security at <http://searchsecurity.techtarget.com/definition/masquerade>

NEW QUESTION 117

- (Topic 1)

Which of the following is the LEAST user accepted biometric device?

- A. Fingerprint
- B. Iris scan
- C. Retina scan
- D. Voice verification

Answer: C

Explanation:

The biometric device that is least user accepted is the retina scan, where a system scans the blood-vessel pattern on the backside of the eyeball. When using this device, an individual has to place their eye up to a device, and may require a puff of air to be blown into the eye. The iris scan only needs for an individual to glance at a camera that could be placed above a door.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (page 131).

NEW QUESTION 118

- (Topic 1)

Which of the following is NOT true of the Kerberos protocol?

- A. Only a single login is required per session.
- B. The initial authentication steps are done using public key algorithm.
- C. The KDC is aware of all systems in the network and is trusted by all of them
- D. It performs mutual authentication

Answer: B

Explanation:

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. It has the following characteristics:

It is secure: it never sends a password unless it is encrypted.

Only a single login is required per session. Credentials defined at login are then passed between resources without the need for additional logins.


The concept depends on a trusted third party – a Key Distribution Center (KDC). The KDC is aware of all systems in the network and is trusted by all of them.

It performs mutual authentication, where a client proves its identity to a server and a server proves its identity to the client.

Kerberos introduces the concept of a Ticket-Granting Server/Service (TGS). A client that wishes to use a service has to receive a ticket from the TGS – a ticket is a time-limited

cryptographic message – giving it access to the server. Kerberos also requires an Authentication Server (AS) to verify clients. The two servers combined make up a KDC.

Within the Windows environment, Active Directory performs the functions of the KDC. The following figure shows the sequence of events required for a client to gain access to a service using Kerberos authentication. Each step is shown with the Kerberos message associated with it, as defined in RFC 4120 “The Kerberos Network Authorization Service (V5)”.

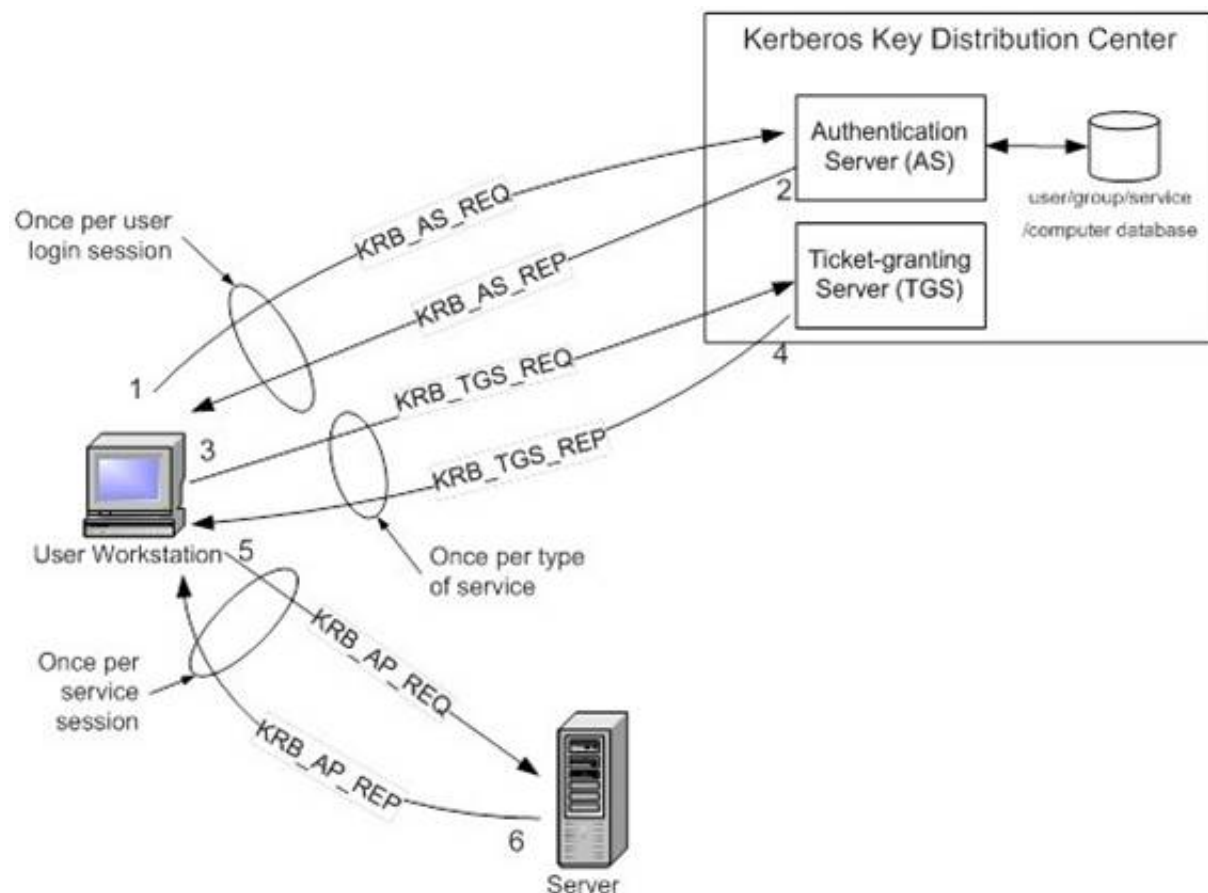

C:\Users\MCS\Desktop\1.jpg Kerberos Authentication Step by Step

Step 1: The user logs on to the workstation and requests service on the host. The workstation sends a message to the Authorization Server requesting a ticket granting ticket (TGT).

Step 2: The Authorization Server verifies the user's access rights in the user database and creates a TGT and session key. The Authorization Server encrypts the results using a key derived from the user's password and sends a message back to the user workstation.

The workstation prompts the user for a password and uses the password to decrypt the incoming message. When decryption succeeds, the user will be able to use the TGT to request a service ticket.

Step 3: When the user wants access to a service, the workstation client application sends a request to the Ticket Granting Service containing the client name, realm name and a timestamp. The user proves his identity by sending an authenticator encrypted with the session key received in Step 2.

Step 4: The TGS decrypts the ticket and authenticator, verifies the request, and creates a ticket for the requested server. The ticket contains the client name and optionally the client IP address. It also contains the realm name and ticket lifespan. The TGS returns the ticket to the user workstation. The returned message contains two copies of a server session key

– one encrypted with the client password, and one encrypted by the service password.

Step 5: The client application now sends a service request to the server containing the ticket received in Step 4 and an authenticator. The service authenticates the request by decrypting the session key. The server verifies that the ticket and authenticator match, and then grants access to the service. This step as described does not include the authorization performed by the Intel AMT device, as described later.

Step 6: If mutual authentication is required, then the server will reply with a server authentication message.

The Kerberos server knows "secrets" (encrypted passwords) for all clients and servers under its control, or it is in contact with other secure servers that have this information. These "secrets" are used to encrypt all of the messages shown in the figure above.

To prevent "replay attacks," Kerberos uses timestamps as part of its protocol definition. For timestamps to work properly, the clocks of the client and the server need to be in synch as much as possible. In other words, both computers need to be set to the same time and date. Since the clocks of two computers are often out of synch, administrators can establish a policy to establish the maximum acceptable difference to Kerberos between a client's clock and server's clock. If the difference between a client's clock and the server's clock is less than the maximum time difference specified in this policy, any timestamp used in a session between the two computers will be considered authentic. The maximum difference is usually set to five minutes.

Note that if a client application wishes to use a service that is "Kerberized" (the service is configured to perform Kerberos authentication), the client must also be Kerberized so that it expects to support the necessary message responses.

For more information about Kerberos, see <http://web.mit.edu/kerberos/www/>.

References:

Introduction to Kerberos Authentication from Intel
and

<http://www.zeroshell.net/eng/kerberos/Kerberos-definitions/#1.3.5.3> and

<http://www.ietf.org/rfc/rfc4120.txt>

NEW QUESTION 121

- (Topic 1)

What is Kerberos?

- A. A three-headed dog from the Egyptian mythology.
- B. A trusted third-party authentication protocol.
- C. A security model.
- D. A remote authentication dial in user server.

Answer: B

Explanation:

Is correct because that is exactly what Kerberos is. The following answers are incorrect:

A three-headed dog from Egyptian mythology. Is incorrect because we are dealing with Information Security and not the Egyptian mythology but the Greek Mythology.

A security model. Is incorrect because Kerberos is an authentication protocol and not just a security model.

A remote authentication dial in user server. Is incorrect because Kerberos is not a remote authentication dial in user server that would be called RADIUS.

NEW QUESTION 123

- (Topic 1)

Controls like guards and general steps to maintain building security, securing of server rooms or laptops, the protection of cables, and usage of magnetic switches on doors and windows are some of the examples of:

- A. Administrative controls
- B. Logical controls
- C. Technical controls
- D. Physical controls

Answer: D

Explanation:

Controls like guards and general steps to maintain building security, securing of server rooms or laptops, the protection of cables, and usage of magnetic switches on doors and windows are all examples of Physical Security.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 127

- (Topic 1)

Which of the following is most appropriate to notify an internal user that session monitoring is being conducted?

- A. Logon Banners
- B. Wall poster
- C. Employee Handbook
- D. Written agreement

Answer: D

Explanation:

This is a tricky question, the keyword in the question is Internal users.

There are two possible answers based on how the question is presented, this question could either apply to internal users or ANY anonymous/external users.

Internal users should always have a written agreement first, then logon banners serve as a constant reminder.

Banners at the log-on time should be used to notify external users of any monitoring that is being conducted. A good banner will give you a better legal stand and also makes it obvious the user was warned about who should access the system, who is authorized and unauthorized, and if it is an unauthorized user then he is fully aware of trespassing. Anonymous/External users, such as those logging into a web site, ftp server or even a mail server; their only notification system is the use of a logon banner.

References used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 50.

and

Shon Harris, CISSP All-in-one, 5th edition, pg 873

NEW QUESTION 130

- (Topic 1)

Which access control model is best suited in an environment where a high security level is required and where it is desired that only the administrator grants access control?

- A. DAC
- B. MAC
- C. Access control matrix
- D. TACACS

Answer: B

Explanation:

MAC provides high security by regulating access based on the clearance of individual users and sensitivity labels for each object. Clearance levels and sensitivity levels cannot be modified by individual users -- for example, user Joe (SECRET clearance) cannot reclassify the "Presidential Doughnut Recipe" from "SECRET" to "CONFIDENTIAL" so that his friend Jane (CONFIDENTIAL clearance) can read it. The administrator is ultimately responsible for configuring this protection in accordance with security policy and directives from the Data Owner.

DAC is incorrect. In DAC, the data owner is responsible for controlling access to the object. Access control matrix is incorrect. The access control matrix is a way of thinking about the

access control needed by a population of subjects to a population of objects. This access control can be applied using rules, ACL's, capability tables, etc.

TACACS is incorrect. TACACS is a tool for performing user authentication. References:

CBK, p. 187, Domain 2: Access Control. AIO3, Chapter 4, Access Control.

NEW QUESTION 134

- (Topic 1)

Which one of the following factors is NOT one on which Authentication is based?

- A. Type 1. Something you know, such as a PIN or password
- B. Type 2. Something you have, such as an ATM card or smart card
- C. Type 3. Something you are (based upon one or more intrinsic physical or behavioral traits), such as a fingerprint or retina scan
- D. Type 4. Something you are, such as a system administrator or security administrator

Answer: D

Explanation:

Authentication is based on the following three factor types:

Type 1. Something you know, such as a PIN or password

Type 2. Something you have, such as an ATM card or smart card

Type 3. Something you are (Unique physical characteristic), such as a fingerprint or retina scan

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

Also: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 132-133).

NEW QUESTION 139

- (Topic 1)

The "vulnerability of a facility" to damage or attack may be assessed by all of the following except:

- A. Inspection
- B. History of losses
- C. Security controls
- D. security budget

Answer: D

Explanation:

Source: The CISSP Examination Textbook- Volume 2: Practice by S. Rao Vallabhaneni.

NEW QUESTION 143

- (Topic 1)

What kind of certificate is used to validate a user identity?

- A. Public key certificate
- B. Attribute certificate
- C. Root certificate
- D. Code signing certificate

Answer: A

Explanation:

In cryptography, a public key certificate (or identity certificate) is an electronic document which incorporates a digital signature to bind together a public key with an identity — information such as the name of a person or an organization, their address, and so forth. The certificate can be used to verify that a public key belongs to an individual.

In a typical public key infrastructure (PKI) scheme, the signature will be of a certificate authority (CA). In a web of trust scheme, the signature is of either the user (a self-signed certificate) or other users ("endorsements"). In either case, the signatures on a certificate are attestations by the certificate signer that the identity information and the public key belong together.

In computer security, an authorization certificate (also known as an attribute certificate) is a digital document that describes a written permission from the issuer to use a service or a resource that the issuer controls or has access to use. The permission can be delegated.

Some people constantly confuse PKCs and ACs. An analogy may make the distinction clear. A PKC can be considered to be like a passport: it identifies the holder, tends to last for a long time, and should not be trivial to obtain. An AC is more like an entry visa: it is typically issued by a different authority and does not last for as long a time. As acquiring an entry visa typically requires presenting a passport, getting a visa can be a simpler process.

A real life example of this can be found in the mobile software deployments by large service providers and are typically applied to platforms such as Microsoft Smartphone (and related), Symbian OS, J2ME, and others.

In each of these systems a mobile communications service provider may customize the mobile terminal client distribution (ie. the mobile phone operating system or application environment) to include one or more root certificates each associated with a set of capabilities or permissions such as "update firmware", "access address book", "use radio interface", and the most basic one, "install and execute". When a developer wishes to enable distribution and execution in one of these controlled environments they must acquire a certificate from an appropriate CA, typically a large commercial CA, and in the process they usually have their identity verified using out-of-band mechanisms such as a combination of phone call, validation of their legal entity through government and commercial databases, etc., similar to the high assurance SSL certificate vetting process, though often there are additional specific requirements imposed on would-be developers/publishers. Once the identity has been validated they are issued an identity certificate they can use to sign their software; generally the software signed by the developer or publisher's identity certificate is not distributed but rather it is submitted to processor to possibly test or profile the content before generating an authorization certificate which is unique to the particular software release. That certificate is then used with an ephemeral asymmetric key-pair to sign the software as the last step of preparation for distribution. There are many advantages to separating the identity and authorization certificates especially relating to risk mitigation of new content being accepted into the system and key management as well as recovery from errant software which can be used as attack vectors.

References:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 2001, McGraw-Hill/Osborne, page 540.

http://en.wikipedia.org/wiki/Attribute_certificate http://en.wikipedia.org/wiki/Public_key_certificate

NEW QUESTION 144

- (Topic 1)

In Synchronous dynamic password tokens:

- A. The token generates a new password value at fixed time intervals (this password could be based on the time of day encrypted with a secret key).
- B. The token generates a new non-unique password value at fixed time intervals (this password could be based on the time of day encrypted with a secret key).
- C. The unique password is not entered into a system or workstation along with an owner's PIN.
- D. The authentication entity in a system or workstation knows an owner's secret key and PIN, and the entity verifies that the entered password is invalid and that it was entered during the invalid time window.

Answer: A

Explanation:

Synchronous dynamic password tokens:

- The token generates a new password value at fixed time intervals (this password could be the time of day encrypted with a secret key).
- the unique password is entered into a system or workstation along with an owner's PIN.
- The authentication entity in a system or workstation knows an owner's secret key and PIN, and the entity verifies that the entered password is valid and that it was entered during the valid time window.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

NEW QUESTION 145

- (Topic 1)

Which of the following would be an example of the best password?

- A. golf001
- B. Elizabeth

- C. T1me4g0lF
- D. password

Answer: C

Explanation:

The best passwords are those that are both easy to remember and hard to crack using a dictionary attack. The best way to create passwords that fulfil both criteria is to use two small unrelated words or phonemes, ideally with upper and lower case characters, a special character, and/or a number. Shouldn't be used: common names, DOB, spouse, phone numbers, words found in dictionaries or system defaults.
Source: ROTHKE, Ben, CISSP CBK Review presentation on domain 1.

NEW QUESTION 148

- (Topic 1)

Why do buffer overflows happen? What is the main cause?

- A. Because buffers can only hold so much data
- B. Because of improper parameter checking within the application
- C. Because they are an easy weakness to exploit
- D. Because of insufficient system memory

Answer: B

Explanation:

Buffer Overflow attack takes advantage of improper parameter checking within the application. This is the classic form of buffer overflow and occurs because the programmer accepts whatever input the user supplies without checking to make sure that the length of the input is less than the size of the buffer in the program. The buffer overflow problem is one of the oldest and most common problems in software development and programming, dating back to the introduction of interactive computing. It can result when a program fills up the assigned buffer of memory with more data than its buffer can hold. When the program begins to write beyond the end of the buffer, the program's execution path can be changed, or data can be written into areas used by the operating system itself. This can lead to the insertion of malicious code that can be used to gain administrative privileges on the program or system.

As explained by Gaurab, it can become very complex. At the time of input even if you are checking the length of the input, it has to be check against the buffer size. Consider a case where entry point of data is stored in Buffer1 of Application1 and then you copy it to Buffer2 within Application2 later on, if you are just checking the length of data against Buffer1, it will

not ensure that it will not cause a buffer overflow in Buffer2 of Application2.

A bit of reassurance from the ISC2 book about level of Coding Knowledge needed for the exam:

It should be noted that the CISSP is not required to be an expert programmer or know the inner workings of developing application software code, like the FORTRAN programming language, or how to develop Web applet code using Java. It is not even necessary that the CISSP know detailed security-specific coding practices such as the major divisions of buffer overflow exploits or the reason for preferring str(n)cpy to strcpy in the C language (although all such knowledge is, of course, helpful). Because the CISSP may be the person responsible for ensuring that security is included in such developments, the CISSP should know the basic procedures and concepts involved during the design and development of software programming. That is, in order for the CISSP to monitor the software development process and verify that security is included, the CISSP must understand the fundamental concepts of programming developments and the security strengths and weaknesses of various application development processes.

The following are incorrect answers:

"Because buffers can only hold so much data" is incorrect. This is certainly true but is not the best answer because the finite size of the buffer is not the problem -- the problem is that the programmer did not check the size of the input before moving it into the buffer.

"Because they are an easy weakness to exploit" is incorrect. This answer is sometimes true but is not the best answer because the root cause of the buffer overflow is that the programmer did not check the size of the user input.

"Because of insufficient system memory" is incorrect. This is irrelevant to the occurrence of a buffer overflow.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 13319-13323). Auerbach Publications. Kindle Edition.

NEW QUESTION 151

- (Topic 1)

Access Control techniques do not include which of the following choices?

- A. Relevant Access Controls
- B. Discretionary Access Control
- C. Mandatory Access Control
- D. Lattice Based Access Control

Answer: A

Explanation:

Access Control Techniques Discretionary Access Control

Mandatory Access Control Lattice Based Access Control Rule-Based Access Control Role-Based Access Control

Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 13.

NEW QUESTION 155

- (Topic 1)

How are memory cards and smart cards different?

- A. Memory cards normally hold more memory than smart cards
- B. Smart cards provide a two-factor authentication whereas memory cards don't
- C. Memory cards have no processing power
- D. Only smart cards can be used for ATM cards

Answer: C

Explanation:

The main difference between memory cards and smart cards is their capacity to process information. A memory card holds information but cannot process

information. A smart card holds information and has the necessary hardware and software to actually process that information.

A memory card holds a user's authentication information, so that this user needs only type in a user ID or PIN and presents the memory card to the system. If the entered information and the stored information match and are approved by an authentication service, the user is successfully authenticated.

A common example of a memory card is a swipe card used to provide entry to a building. The user enters a PIN and swipes the memory card through a card reader. If this is the correct combination, the reader flashes green and the individual can open the door and enter the building.

Memory cards can also be used with computers, but they require a reader to process the information. The reader adds cost to the process, especially when one is needed for every computer. Additionally, the overhead of PIN and card generation adds additional overhead and complexity to the whole authentication process. However, a memory card provides a more secure authentication method than using only a password because the attacker would need to obtain the card and know the correct PIN.

Administrators and management need to weigh the costs and benefits of a memory card implementation as well as the security needs of the organization to determine if it is the right authentication mechanism for their environment.

One of the most prevalent weaknesses of memory cards is that data stored on the card are not protected. Unencrypted data on the card (or stored on the magnetic strip) can be extracted or copied. Unlike a smart card, where security controls and logic are embedded in the integrated circuit, memory cards do not employ an inherent mechanism to protect the data from exposure.

Very little trust can be associated with confidentiality and integrity of information on the memory cards.

The following answers are incorrect:

"Smart cards provide two-factor authentication whereas memory cards don't" is incorrect. This is not necessarily true. A memory card can be combined with a pin or password to offer two factors authentication where something you have and something you know are used for factors.

"Memory cards normally hold more memory than smart cards" is incorrect. While a memory card may or may not have more memory than a smart card, this is certainly not the best answer to the question.

"Only smart cards can be used for ATM cards" is incorrect. This depends on the decisions made by the particular institution and is not the best answer to the question.

Reference(s) used for this question:

Shon Harris, CISSP All In One, 6th edition , Access Control, Page 199 and also for people using the Kindle edition of the book you can look at Locations 4647-4650.

Schneider, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition : Access Control ((ISC)2 Press) (Kindle Locations 2124-2139). Auerbach Publications. Kindle Edition.

NEW QUESTION 160

- (Topic 1)

In response to Access-request from a client such as a Network Access Server (NAS), which of the following is not one of the response from a RADIUS Server?

- A. Access-Accept
- B. Access-Reject
- C. Access-Granted
- D. Access-Challenge

Answer: C

Explanation:

In response to an access-request from a client, a RADIUS server returns one of three authentication responses: access-accept, access-reject, or access-challenge, the latter being a request for additional authentication information such as a one-time password from a token or a callback identifier.

Source: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 2, 2001, CRC Press, NY, page 36.

NEW QUESTION 165

- (Topic 1)

In biometric identification systems, the parts of the body conveniently available for identification are:

- A. neck and mouth
- B. hands, face, and eyes
- C. feet and hair
- D. voice and neck

Answer: B

Explanation:

Today implementation of fast, accurate, reliable, and user-acceptable biometric identification systems are already under way. Because most identity authentication takes place when a people are fully clothed (neck to feet and wrists), the parts of the body conveniently available for this purpose are hands, face, and eyes. From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

NEW QUESTION 168

- (Topic 1)

Which of the following was developed to address some of the weaknesses in Kerberos and uses public key cryptography for the distribution of secret keys and provides additional access control support?

- A. SESAME
- B. RADIUS
- C. KryptoKnight
- D. TACACS+

Answer: A

Explanation:

Secure European System for Applications in a Multi-vendor Environment (SESAME) was developed to address some of the weaknesses in Kerberos and uses public key cryptography for the distribution of secret keys and provides additional access control support.

Reference:

TIPTON, Harold, Official (ISC)2 Guide to the CISSP CBK (2007), page 184. ISC OIG Second Edition, Access Controls, Page 111

NEW QUESTION 169

- (Topic 1)

Which of the following security controls might force an operator into collusion with personnel assigned organizationally within a different function in order to gain access to unauthorized data?

- A. Limiting the local access of operations personnel
- B. Job rotation of operations personnel
- C. Management monitoring of audit logs
- D. Enforcing regular password changes

Answer: A

Explanation:

The questions specifically said: "within a different function" which eliminate Job Rotation as a choice.

Management monitoring of audit logs is a detective control and it would not prevent collusion.

Changing passwords regularly would not prevent such attack.

This question validates if you understand the concept of separation of duties and least privilege. By having operators that have only the minimum access level they need and only what they need to do their duties within a company, the operations personnel would be forced to use collusion to defeat those security mechanisms.

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

NEW QUESTION 171

- (Topic 1)

An attack initiated by an entity that is authorized to access system resources but uses them in a way not approved by those who granted the authorization is known as a(n):

- A. active attack
- B. outside attack
- C. inside attack
- D. passive attack

Answer: C

Explanation:

An inside attack is an attack initiated by an entity inside the security perimeter, an entity that is authorized to access system resources but uses them in a way not approved by those who granted the authorization whereas an outside attack is initiated from outside the perimeter, by an unauthorized or illegitimate user of the system. An active attack attempts to alter system resources to affect their operation and a passive attack attempts to learn or make use of the information from the system but does not affect system resources.

Source: SHIREY, Robert W., RFC2828: Internet Security Glossary, May 2000.

NEW QUESTION 172

- (Topic 1)

Which of the following are not Remote Access concerns?

- A. Justification for remote access
- B. Auditing of activities
- C. Regular review of access privileges
- D. Access badges

Answer: D

Explanation:

Access badges are more relevant to physical security rather than remote access.

"Justification for remote access" is incorrect. Justification for remote access is a relevant concern.

"Auditing of activities" is incorrect. Auditing of activities is an important aspect to assure that malicious or unauthorized activities are not occurring.

"Regular review of access privileges" is incorrect. Regular review of remote access privileges is an important management responsibility.

References:

AIO3, pp. 547 - 548

NEW QUESTION 173

- (Topic 1)

What would be the name of a Logical or Virtual Table dynamically generated to restrict the information a user can access in a database?

- A. Database Management system
- B. Database views
- C. Database security
- D. Database shadowing

Answer: B

Explanation:

The Answer Database views; Database views are mechanisms that restrict access to the information that a user can access in a database. Source: KRUTZ, Ronald L.

& VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

Wikipedia has a detailed explanation as well:

In database theory, a view is a virtual or logical table composed of the result set of a query. Unlike ordinary tables (base tables) in a relational database, a view is not part of the physical schema: it is a dynamic, virtual table computed or collated from data in the database. Changing the data in a table alters the data shown in the view.

Views can provide advantages over tables; They can subset the data contained in a table

They can join and simplify multiple tables into a single virtual table

Views can act as aggregated tables, where aggregated data (sum, average etc.) are calculated and presented as part of the data

Views can hide the complexity of data, for example a view could appear as Sales2000 or Sales2001, transparently partitioning the actual underlying table
Views do not incur any extra storage overhead
Depending on the SQL engine used, views can provide extra security.
Limit the exposure to which a table or tables are exposed to outer world
Just like functions (in programming) provide abstraction, views can be used to create abstraction. Also, just like functions, views can be nested, thus one view can aggregate data from other views. Without the use of views it would be much harder to normalise databases above second normal form. Views can make it easier to create lossless join decomposition.

NEW QUESTION 176

- (Topic 1)

Which of the following access control models requires security clearance for subjects?

- A. Identity-based access control
- B. Role-based access control
- C. Discretionary access control
- D. Mandatory access control

Answer: D

Explanation:

With mandatory access control (MAC), the authorization of a subject's access to an object is dependant upon labels, which indicate the subject's clearance. Identity-based access control is a type of discretionary access control. A role-based access control is a type of non-discretionary access control. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

NEW QUESTION 177

- (Topic 1)

Which of the following classes is the first level (lower) defined in the TCSEC (Orange Book) as mandatory protection?

- A. B
- B. A
- C. C
- D. D

Answer: A

Explanation:

B level is the first Mandatory Access Control Level.
First published in 1983 and updated in 1985, the TCSEC, frequently referred to as the Orange Book, was a United States Government Department of Defense (DoD) standard that sets basic standards for the implementation of security protections in computing systems. Primarily intended to help the DoD find products that met those basic standards, TCSEC was used to evaluate, classify, and select computer systems being considered for the processing, storage, and retrieval of sensitive or classified information on military and government systems. As such, it was strongly focused on enforcing confidentiality with no focus on other aspects of security such as integrity or availability. Although it has since been superseded by the common criteria, it influenced the development of other product evaluation criteria, and some of its basic approach and terminology continues to be used.
Reference used for this question:
Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 17920-17926). Auerbach Publications. Kindle Edition.
and
THE source for all TCSEC "level" questions: <http://csrc.nist.gov/publications/secpubs/rainbow/std001.txt> (paragraph 3 for this one)

NEW QUESTION 178

- (Topic 1)

What can be defined as a table of subjects and objects indicating what actions individual subjects can take upon individual objects?

- A. A capacity table
- B. An access control list
- C. An access control matrix
- D. A capability table

Answer: C

Explanation:

The matrix lists the users, groups and roles down the left side and the resources and functions across the top. The cells of the matrix can either indicate that access is allowed or indicate the type of access. CBK pp 317 - 318.
AIO3, p. 169 describes it as a table of subjects and objects specifying the access rights a certain subject possesses pertaining to specific objects.
In either case, the matrix is a way of analyzing the access control needed by a population of subjects to a population of objects. This access control can be applied using rules, ACL's, capability tables, etc.
"A capacity table" is incorrect.
This answer is a trap for the unwary -- it sounds a little like "capability table" but is just there to distract you.
"An access control list" is incorrect.
"It [ACL] specifies a list of users [subjects] who are allowed access to each object" CBK, p. 188 Access control lists (ACL) could be used to implement the rules identified by an access control matrix but is different from the matrix itself.
"A capability table" is incorrect.
"Capability tables are used to track, manage and apply controls based on the object and rights, or capabilities of a subject. For example, a table identifies the object, specifies access rights allowed for a subject, and permits access based on the user's possession of a capability (or ticket) for the object." CBK, pp. 191-192.
To put it another way, as noted in AIO3 on p. 169, "A capability table is different from an ACL because the subject is bound to the capability table, whereas the object is bound to the ACL."
Again, a capability table could be used to implement the rules identified by an access control matrix but is different from the matrix itself.
References:
CBK pp. 191-192, 317-318

AIO3, p. 169

NEW QUESTION 181

- (Topic 1)

What is the difference between Access Control Lists (ACLs) and Capability Tables?

- A. Access control lists are related/attached to a subject whereas capability tables are related/attached to an object.
- B. Access control lists are related/attached to an object whereas capability tables are related/attached to a subject.
- C. Capability tables are used for objects whereas access control lists are used for users.
- D. They are basically the same.

Answer: B

Explanation:

Capability tables are used to track, manage and apply controls based on the object and rights, or capabilities of a subject. For example, a table identifies the object, specifies access rights allowed for a subject, and permits access based on the user's possession of a capability (or ticket) for the object. It is a row within the matrix.

To put it another way, A capability table is different from an ACL because the subject is bound to the capability table, whereas the object is bound to the ACL.

CLEMENT NOTE:

If we wish to express this very simply:

Capabilities are attached to a subject and it describes what access the subject has to each of the objects on the row that matches with the subject within the matrix. It is a row within the matrix.

ACL's are attached to objects, it describes who has access to the object and what type of access they have. It is a column within the matrix.

The following are incorrect answers:

"Access control lists are subject-based whereas capability tables are object-based" is incorrect.

"Capability tables are used for objects whereas access control lists are used for users" is incorrect.

"They are basically the same" is incorrect. References used for this question:

CBK, pp. 191 - 192

AIO3 p. 169

NEW QUESTION 182

- (Topic 1)

Which type of password provides maximum security because a new password is required for each new log-on?

- A. One-time or dynamic password
- B. Cognitive password
- C. Static password
- D. Passphrase

Answer: A

Explanation:

"one-time password" provides maximum security because a new password is required for each new log-on.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 185

- (Topic 1)

In Discretionary Access Control the subject has authority, within certain limitations,

- A. but he is not permitted to specify what objects can be accessible and so we need to get an independent third party to specify what objects can be accessible.
- B. to specify what objects can be accessible.
- C. to specify on an aggregate basis without understanding what objects can be accessible.
- D. to specify in full detail what objects can be accessible.

Answer: B

Explanation:

With Discretionary Access Control, the subject has authority, within certain limitations, to specify what objects can be accessible.

For example, access control lists can be used. This type of access control is used in local, dynamic situations where the subjects must have the discretion to specify what resources certain users are permitted to access.

When a user, within certain limitations, has the right to alter the access control to certain objects, this is termed as user-directed discretionary access control. In some instances, a hybrid approach is used, which combines the features of user-based and identity-based discretionary access control.

References:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

and

HARRIS, Shon, All-In-One CISSP Certification Exam Guide 5th Edition, McGraw-Hill/Osborne, 2010, Chapter 4: Access Control (page 210-211).

NEW QUESTION 187

- (Topic 1)

Which of the following is addressed by Kerberos?

- A. Confidentiality and Integrity
- B. Authentication and Availability
- C. Validation and Integrity
- D. Auditability and Integrity

Answer: A

Explanation:

Kerberos addresses the confidentiality and integrity of information. It also addresses primarily authentication but does not directly address availability.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

and <https://www.ietf.org/rfc/rfc4120.txt> and

<http://learn-networking.com/network-security/how-kerberos-authentication-works>

NEW QUESTION 191

- (Topic 1)

Which of the following statements pertaining to Kerberos is false?

- A. The Key Distribution Center represents a single point of failure.
- B. Kerberos manages access permissions.
- C. Kerberos uses a database to keep a copy of all users' public keys.
- D. Kerberos uses symmetric key cryptography.

Answer: C

Explanation:

Kerberos is a trusted, credential-based, third-party authentication protocol that uses symmetric (secret) key cryptography to provide robust authentication to clients accessing services on a network.

One weakness of Kerberos is its Key Distribution Center (KDC), which represents a single point of failure.

The KDC contains a database that holds a copy of all of the symmetric/secret keys for the principals.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page40).

NEW QUESTION 192

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

SSCP Practice Exam Features:

- * SSCP Questions and Answers Updated Frequently
- * SSCP Practice Questions Verified by Expert Senior Certified Staff
- * SSCP Most Realistic Questions that Guarantee you a Pass on Your First Try
- * SSCP Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The SSCP Practice Test Here](#)