

300-735 Dumps

Automating and Programming Cisco Security Solutions (SAUTO)

<https://www.certleader.com/300-735-dumps.html>



NEW QUESTION 1

Which description of synchronous calls to an API is true?

- A. They can be used only within single-threaded processes.
- B. They pause execution and wait for the response.
- C. They always successfully return within a fixed time.
- D. They can be used only for small requests.

Answer: B

NEW QUESTION 2

DRAG DROP

Drag and drop the code to complete the script to search Cisco ThreatGRID and return all public submission records associated with cisco.com. Not all options are used.

Select and Place:

```
import requests

API_KEY = 'asdf1234asdf1234asdf1234'

QUERY = ' ',

URL = 'https://panacea.threatgrid.com/api/v2/ ' / ' ',

PARAMS={"q":QUERY,"api_key":API_KEY}

request = requests.get(url=URL, params=PARAMS)

print(request.json)
```

submissions

public

query

cisco

search

cisco.com

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

```
import requests

API_KEY = 'asdf1234asdf1234asdf1234'

QUERY = ' cisco.com ',

URL = 'https://panacea.threatgrid.com/api/v2/ search / submissions ',

PARAMS={"q":QUERY,"api_key":API_KEY}

request = requests.get(url=URL, params=PARAMS)

print(request.json)
```

submissions

public

query

cisco

search

cisco.com

NEW QUESTION 3

```
import requests

headers = {
    'Authorization': 'Bearer ' + investigate_api_key
}

domains=["cisco.com", "google.com", "xreddfr.df"]

investigate_url= "https://investigate.api.umbrella.com/domains/categorization/"
values = str(json.dumps(domains))
response = requests.post(investigate_url, data=values, headers=headers)
```

Refer to the exhibit.

What does the response from the API contain when this code is executed?

- A. error message and status code of 403
- B. newly created domains in Cisco Umbrella Investigate
- C. updated domains in Cisco Umbrella Investigate
- D. status and security details for the domains

Answer: D

NEW QUESTION 4

DRAG DROP

Drag and drop the code to complete the API call to query all Cisco Stealthwatch Cloud observations. Not all options are used.

Select and Place:

https://example.observbl.com/api/v3/

/

observations

DELETE

GET

POST

all/

all

obsrv

?query=all

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

GET

https://example.observbl.com/api/v3/

observations

/

all

observations

DELETE

GET

POST

all/

all

obsrv

?query=all

NEW QUESTION 5

Refer to the exhibit.

Which expression prints the text "802.1x"?

- A. `print(quiz[0]['choices']['b'])`
- B. `print(quiz['choices']['b'])`
- C. `print(quiz[0]['choices']['b']['802.1x'])`
- D. `print(quiz[0]['question']['choices']['b'])`

Answer: A

NEW QUESTION 6

Which snippet is used to create an object for network 10.0.69.0/24 using Cisco Firepower Management Center REST APIs?

A.

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networks

- METHOD:
POST

- INPUT JSON:
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " ",
  "name": "Branch_1_net"
}
```

B.

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networkgroups

- METHOD:
PUT

- INPUT JSON:
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " ",
  "name": "Branch_1_net"
}
```

C.

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networkgroups

- METHOD:
POST

- INPUT JSON:
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " "
}
```

D.

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/networks

- METHOD:
POST

- INPUT JSON:
{
  "type": "Network",
  "value": "10.0.69.0/24",
  "overridable": false,
  "description": " "
}
```

Answer: A

NEW QUESTION 7

DRAG DROP

Drag and drop the code to complete the curl command to query the Cisco Umbrella Investigate API for the umbrella popularity list. Not all options are used.
Select and Place:

```
curl -H "Authorization:  %YourToken%"
"https://investigate.api.umbrella.com/
```

tophundred

Basic

topmillion

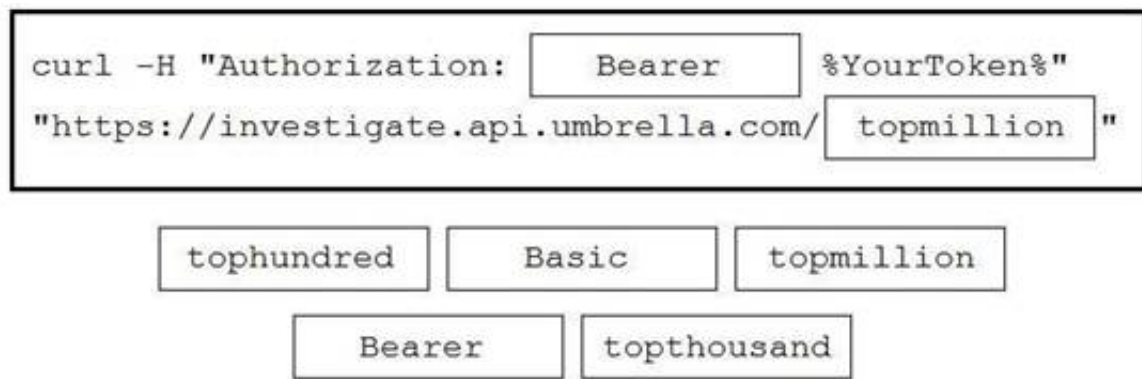
Bearer

topthousand

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

**NEW QUESTION 8**

In Cisco AMP for Endpoints, which API queues to find the list of endpoints in the group "Finance Hosts," which has a GUID of 6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03?

- A. [https://api.amp.cisco.com/v1/endpoints?group\[\]=6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03](https://api.amp.cisco.com/v1/endpoints?group[]=6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03)
- B. [https://api.amp.cisco.com/v1/computers?group_guid\[\]=6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03](https://api.amp.cisco.com/v1/computers?group_guid[]=6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03)
- C. https://api.amp.cisco.com/v1/computers?group_guid-6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03
- D. <https://api.amp.cisco.com/v1/endpoints?group-6c3c2005-4c74-4ba7-8dbb-c4d5b6baf03>

Answer: B

NEW QUESTION 9

For which two programming languages does Cisco offer an SDK for Cisco pxGrid 1.0? (Choose two.)

- A. Python
- B. Perl
- C. Java
- D. C
- E. JavaScript

Answer: CD

NEW QUESTION 10

Which two URI parameters are needed for the Cisco Stealthwatch Top Alarm Host v1 API? (Choose two.)

- A. startAbsolute
- B. externalGeos
- C. tenantId
- D. intervalLength
- E. tagID

Answer: CE

NEW QUESTION 10

Refer to the exhibit.

Which URL returned the data?

- A. <https://api.amp.cisco.com/v1/computers>
- B. <https://api.amp.cisco.com/v0/computers>
- C. <https://amp.cisco.com/api/v0/computers>
- D. <https://amp.cisco.com/api/v1/computers>

Answer: A

NEW QUESTION 11

After changes are made to the Cisco Firepower Threat Defense configuration using the Cisco Firepower Device Manager API, what must be done to ensure that the new policy is activated?

- A. Submit a POST to the /api/fdm/latest/operational/deploy URI.
- B. Submit a GET to the /api/fdm/latest/operational/deploy URI.
- C. Submit a PUT to the /api/fdm/latest/devicesettings/pushpolicy URI.
- D. Submit a POST to the /api/fdm/latest/devicesettings/pushpolicy URI.

Answer: A

NEW QUESTION 15


```
curl -X PUT \
--header "Accept: application/json" \
--header "Authorization: Bearer ${ACCESS_TOKEN}" \
--header "Content-Type: application/json" \
-d '{
  "id": "XXXXXXXXXX",
  "ruleAction": "DENY",
  "eventLogAction": "LOG_FLOW_START",
  "type": "accessrule",
}' \
"https://${HOST}:${PORT}/api/fdm/v3/policy/accesspolicies
/{parentId}/accessrules/{objId}"
```

Refer to the exhibit. The security administrator must temporarily disallow traffic that goes to a production web server using the Cisco FDM REST API. The administrator sends an API query as shown in the exhibit. What is the outcome of that action?

- A. The given code does not execute because the mandatory parameters, source, destination, and services are missin
- B. The given code does not execute because it uses the HTTP method "PUT". It should use the HTTP method "POST".
- C. The appropriate rule is updated with the source, destination, services, and other fields set to "Any" and the action set to "DENY". Traffic to the production web server is disallowed, as expected.
- D. A new rule is created with the source, destination, services, and other fields set to "Any" and the action set to "DENY". Traffic to the production web server is disallowed, as expected.

Answer: C

NEW QUESTION 18

FILL BLANK

Fill in the blank to complete the statement with the correct technology.

Cisco Investigate provides access to data that pertains to DNS security events and correlations collected by the Cisco security team.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Umbrella

NEW QUESTION 22

Refer to the exhibit. The script outputs too many results when it is queried against the Cisco Umbrella Reporting API. Which two configurations restrict the returned result to only 10 entries? (Choose two.)

- A. Add params parameter in the get and assign in the {"return": "10"} value.
- B. Add ?limit=10 to the end of the URL string.
- C. Add params parameter in the get and assign in the {"limit": "10"} value.
- D. Add ?find=10 to the end of the URL string.
- E. Add ?return=10 to the end of the URL string.

Answer: BC

NEW QUESTION 23

DRAG DROP

A Python script is being developed to return the top 10 identities in an organization that have made a DNS request to "www.cisco.com". Drag and drop the code to complete the Cisco Umbrella Reporting API query to return the top identities. Not all options are used. Select and Place:

```
import requests

URL = 'https://reports.api.umbrella.com/v1/organizations/fe4936f9/
[ ] / [ ] / [ ]'

HEADERS = {'Authorization': 'Basic aGVsb29oYXVhYnd5YXNk'}

response = requests.get(URL, headers=HEADERS)
```

security-activity

destinations

activity

www.cisco.com

identities

topIdentities

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

```
import requests

URL = 'https://reports.api.umbrella.com/v1/organizations/fe4936f9/
destinations / www.cisco.com / activity'

HEADERS = {'Authorization': 'Basic aGVsb29oYXViYnd5YXNk'}

response = requests.get(URL, headers=HEADERS)
```

security-activity

destinations

activity

www.cisco.com

identities

topIdentities

NEW QUESTION 28

What are two capabilities of Cisco Firepower Management Center eStreamer? (Choose two.)

- A. eStreamer is used to get sources for intelligence services.
- B. eStreamer is used to send malware event data.
- C. eStreamer is used to get a list of access control policies.
- D. eStreamer is used to send policy data.
- E. eStreamer is used to send intrusion event data.

Answer: BE

NEW QUESTION 30

```
import requests

API_KEY = "123456789abcdef"

URL = "https://example.obsrvbl.com/api/v3/alerts/alert/"

HEADERS = {"Authorization": "Bearer {}".format(API_KEY)}

response = requests.get(URL, headers=HEADERS)
```

Refer to the exhibit. A security engineer created a script and successfully executed it to retrieve all currently open alerts. Which print command shows the first returned alert?

- A. `print(response[data][0])`
- B. `print(response[results][0])`
- C. `print(response.json()[data][0])`
- D. `print(response.json()[results][0])`

Answer: A

NEW QUESTION 33

Which two statements describe the characteristics of API styles for REST and RPC? (Choose two.)

- A. REST-based APIs function in a similar way to procedures.
- B. REST-based APIs are used primarily for CRUD operations.
- C. REST and RPC API styles are the same.
- D. RPC-based APIs function in a similar way to procedures.
- E. RPC-based APIs are used primarily for CRUD operations.

Answer: BD

NEW QUESTION 35

Which header set should be sent with all API calls to the Cisco Stealthwatch Cloud API?

- A. **Content-Type: application/json**
Accept: application/json
Authorization: Bearer <api_key>
- B. **Content-Type: application/json**
Accept: application/json
Authorization: ApiKey <username>:<api_key>
- C.

- Content-Type: application/json
Accept: application/json
Authorization: Basic <api_key>
- D. Content-Type: application/json
Accept: application/json
Authorization: <username>:<api_key>

Answer: B

NEW QUESTION 36

Refer to the exhibit. A network operator wrote a Python script to retrieve events from Cisco AMP.

```
import requests  
CLIENT_ID = 'a1b2c3d4e5f6g7h8i9j0'  
API_KEY = 'a1b2c3d4-e5f6-g7h8-i9j0-k112m3n4o5p6'  
----MISSING CODE----  
URL = BASE_URL+'/v1/events'  
request = requests.get(url, auth=(amp_client_id, amp_api_key))
```

Against which API gateway must the operator make the request?

- A. BASE_URL = "https://api.amp.cisco.com"
B. BASE_URL = "https://amp.cisco.com/api"
C. BASE_URL = "https://amp.cisco.com/api/"
D. BASE_URL = "https://api.amp.cisco.com/"

Answer: A

NEW QUESTION 38

What is the purpose of the snapshot APIs exposed by Cisco Stealthwatch Cloud?

- A. Report on flow data during a customizable time period.
B. Operate and return alerts discovered from infrastructure observations.
C. Return current configuration data of Cisco Stealthwatch Cloud infrastructure.
D. Create snapshots of supported Cisco Stealthwatch Cloud infrastructure.

Answer: B

NEW QUESTION 42

Request URL:
<https://198.18.133.8/api/fdm/v1/policy/intrusionpolicies>

Refer to the exhibit.

What is the purpose of the API represented by this URL?

- A. Getting or setting intrusion policies in FMC
B. Creating an intrusion policy in FDM
C. Updating access policies
D. Getting the list of intrusion policies configured in FDM

Answer: D

NEW QUESTION 45

Which step is required by Cisco pxGrid providers to expose functionality to consumer applications that are written in Python? A. Look up the existing service using the /pxgrid/control/ServiceLookup endpoint.

- A. Register the service using the /pxgrid/control/ServiceRegister endpoint.
B. Configure the service using the /pxgrid/ise/config/profiler endpoint.
C. Expose the service using the /pxgrid/ise/pubsub endpoint.

Answer: D

NEW QUESTION 47

Which URI string is used to create a policy that takes precedence over other applicable policies that are configured on Cisco Stealthwatch?

- A. /tenants/{tenantId}/policy/system/host-policy
B. /tenants/{tenantId}/policy/system/role-policy
C. /tenants/{tenantId}/policy/system
D. /tenants/{tenantId}/policy/system/{policyId}

Answer: A

NEW QUESTION 48

DRAG DROP

Drag and drop the code to complete the URL for the Cisco AMP for Endpoints API POST request so that it will add a sha256 to a given file_list using file_list_guid.
Select and Place:

https://api.amp.cisco.com/v1

/

/

/

/

files

file_lists

{:sha256}

{:file_list_guid}

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

https://api.amp.cisco.com/v1

/

file_lists

/

{:file_list_guid}

/

files

/

{:sha256}

files

file_lists

{:sha256}

{:file_list_guid}

NEW QUESTION 51

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 300-735 Exam with Our Prep Materials Via below:

<https://www.certleader.com/300-735-dumps.html>