

Cisco


Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)




NEW QUESTION 1


An engineer is implementing a Cisco ACI data center network that includes Cisco Nexus 2000 Series 10G fabric extenders. Which physical topology is supported?
 A.

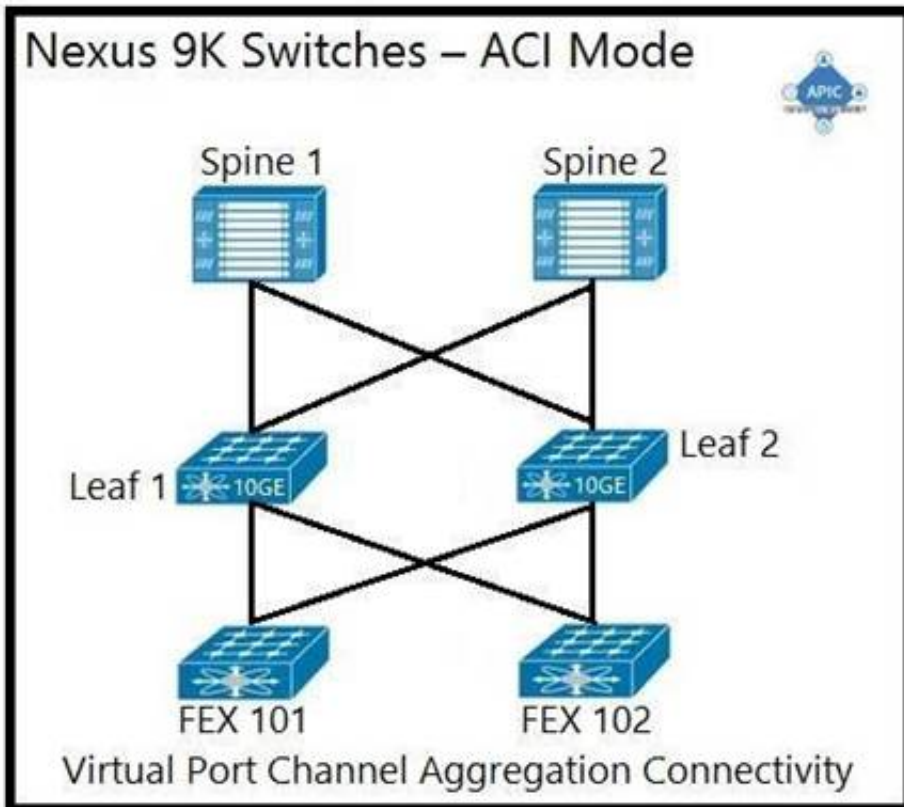


B.

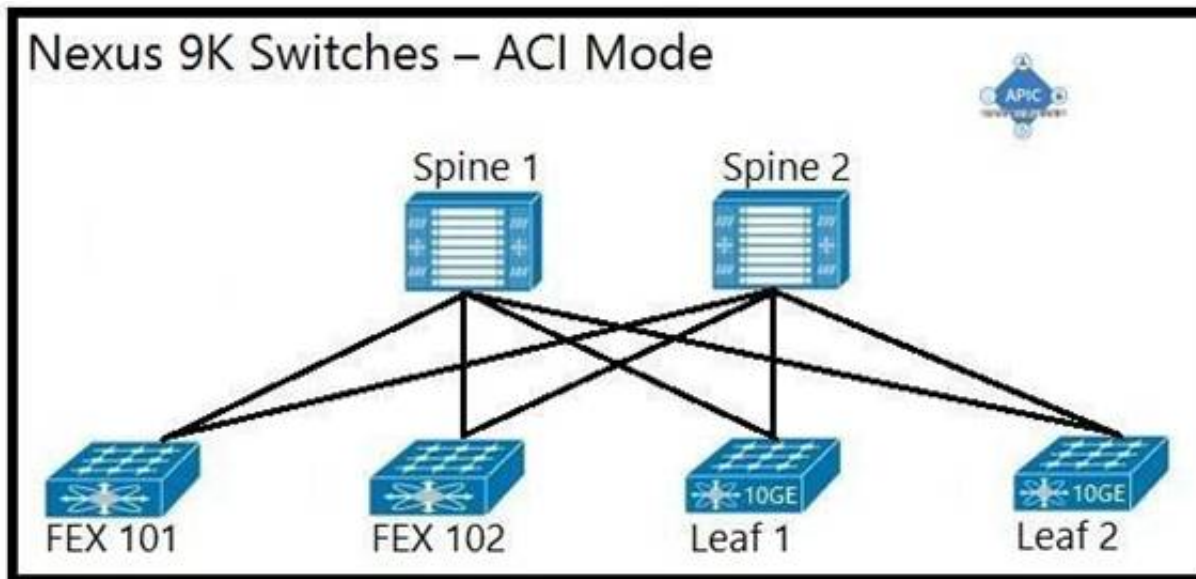

C.

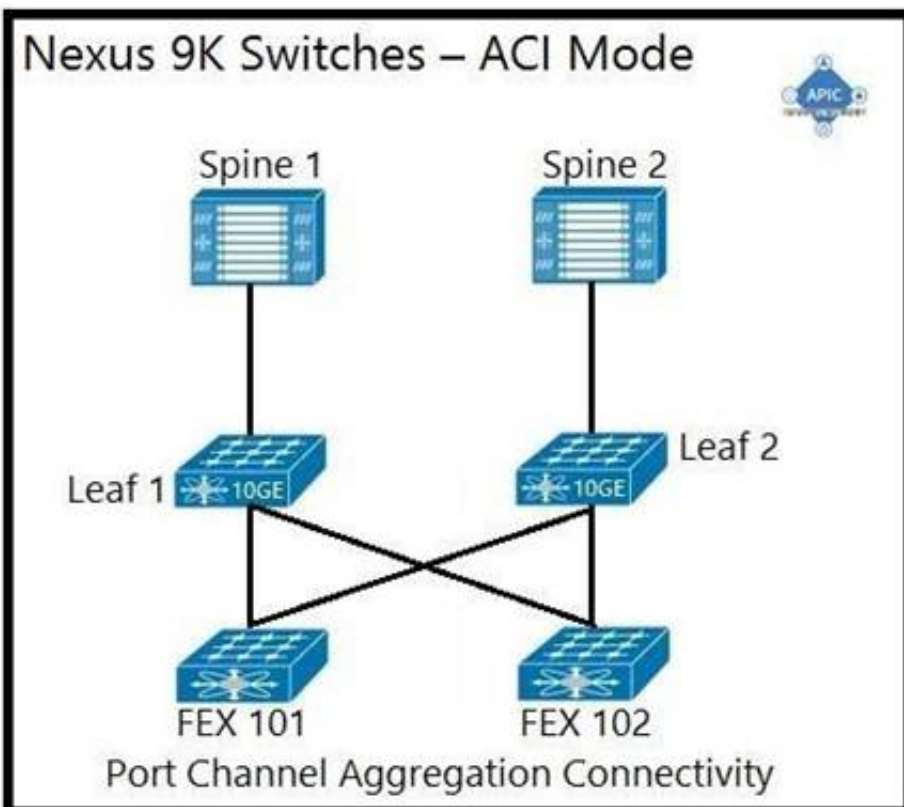

A.

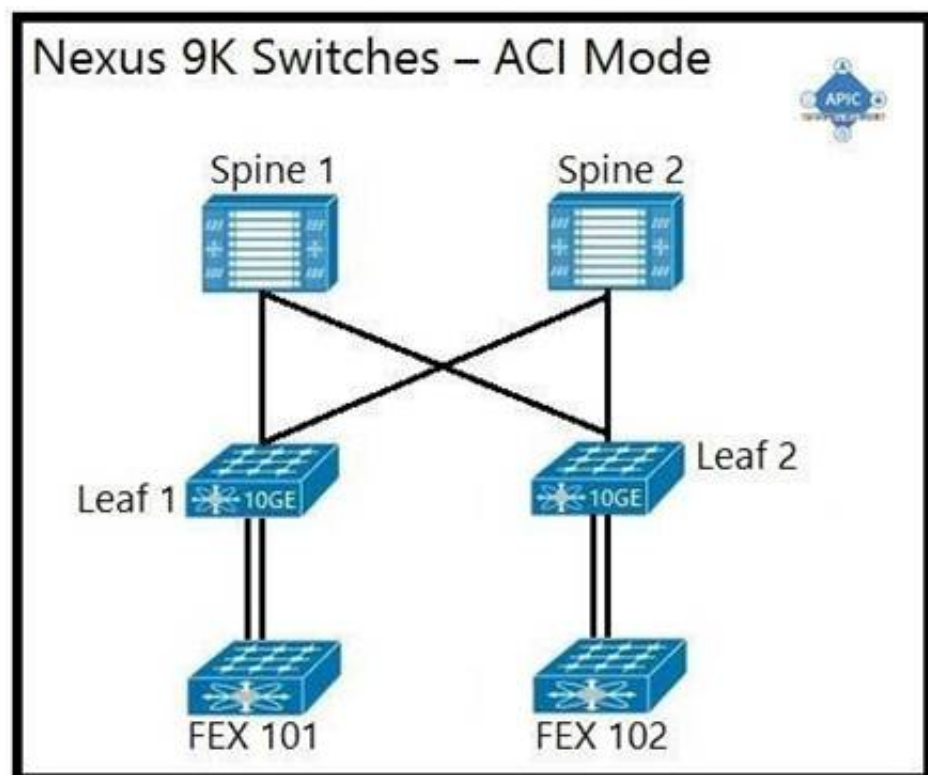

Answer: D

NEW QUESTION 2

An ACI administrator notices a change in the behavior of the fabric. Which action must be taken to determine if a human intervention introduced the change?

- A. Inspect event records in the APIC UI to see all actions performed by users.
- B. Inspect /var/log/audit_messages on the APIC to see a record of all user actions.
- C. Inspect audit logs in the APIC UI to see all user events.
- D. Inspect the output of show command history in the APIC CLI.

Answer: A

NEW QUESTION 3

An engineer is creating a configuration import policy that must terminate if the imported configuration is incompatible with the existing system. Which import mode achieves this result?

- A. merge
- B. atomic
- C. best effort
- D. replace

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401_chapter_01011.html

NEW QUESTION 4

A RADIUS user resolves its role via the Cisco AV Pair. What object does the Cisco AV Pair resolve to?

- A. tenant
- B. security domain
- C. primary Cisco APIC
- D. managed object class

Answer: D

Explanation:


Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 5

DRAG DROP

An engineer is configuring a VRF for a tenant named Cisco. Drag and drop the child objects on the left onto the correct containers on the right for this configuration.

- Application profile
- Bridge domain
- EPG
- VRF

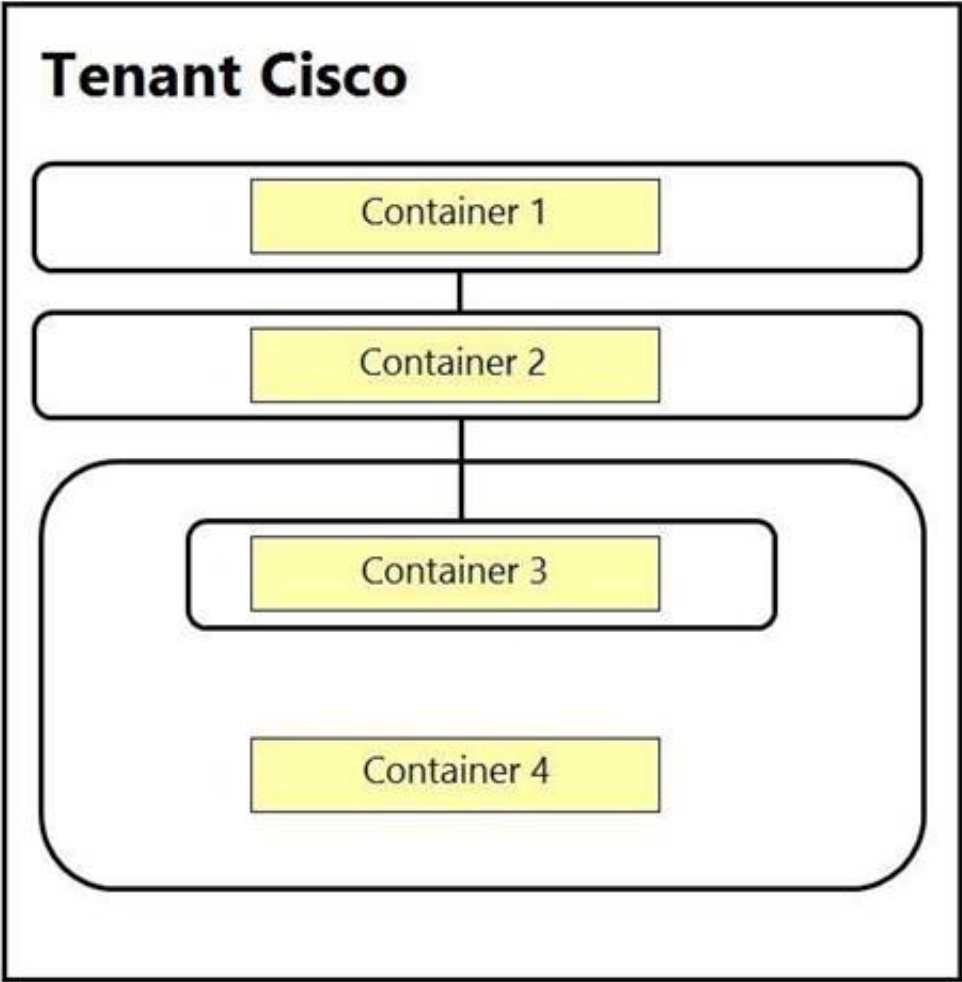


- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

- Application profile
- Bridge domain
- EPG
- VRF

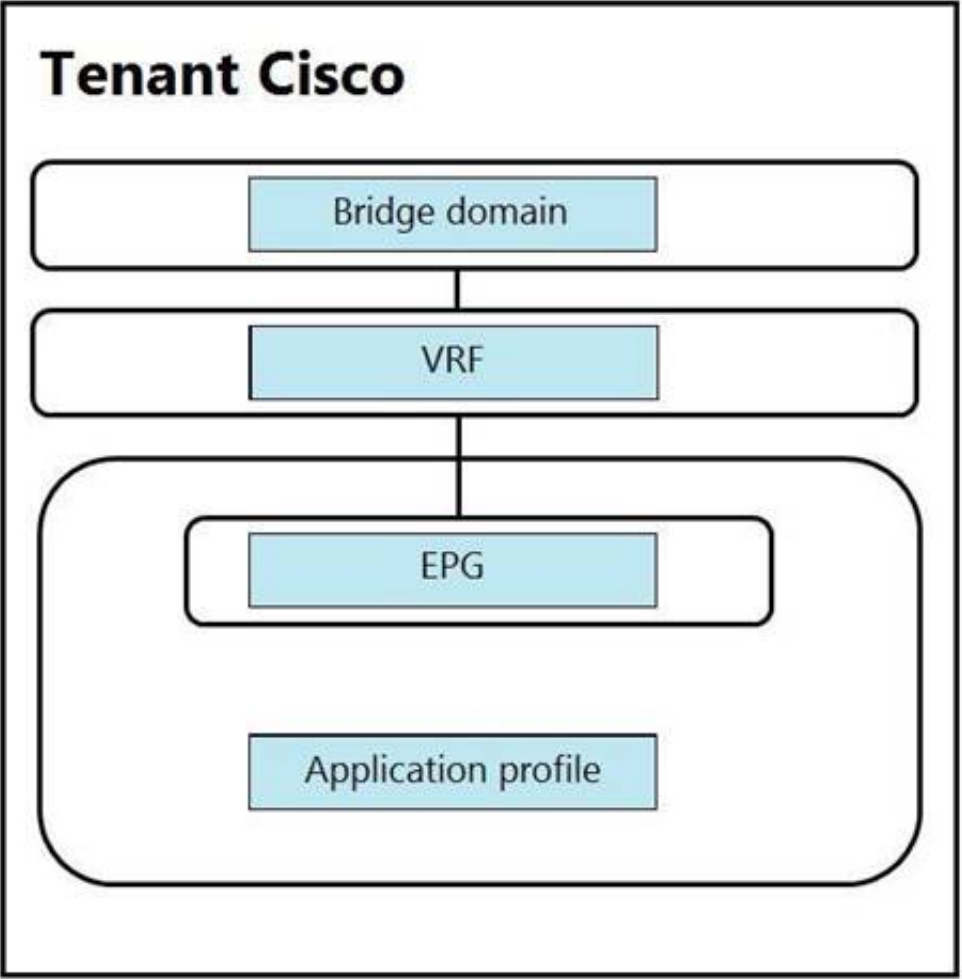

NEW QUESTION 6

An engineer is implementing Cisco ACI at a large platform-as-a-service provider using APIC controllers, 9396PX leaf switches, and 9336PQ spine switches. The leaf switch ports are configured as IEEE 802.1p ports. Where does the traffic exit from the EPG in IEEE 802.1p mode in this configuration?

- A. from leaf ports tagged as VLAN 0
- B. from leaf ports untagged
- C. from leaf ports tagged as VLAN 4094
- D. from leaf ports tagged as VLAN 1

Answer: A

NEW QUESTION 7

How is an EPG extended outside of the ACI fabric?

- A. Create an external bridged network that is assigned to a leaf port.
- B. Create an external routed network that is assigned to an EPG.
- C. Enable unicast routing within an EPG.
- D. Statically assign a VLAN ID to a leaf port in an EPG.

Answer: D

Explanation:

Reference: <https://www.dclessons.com/l2-external-network-with-aci>

NEW QUESTION 8

When creating a subnet within a bridge domain, which configuration option is used to specify the network visibility of the subnet?

- A. limit IP learning to subnet
- B. scope
- C. gateway IP
- D. subnet control

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0111.html

NEW QUESTION 9

What does a bridge domain represent?

- A. Layer 3 cloud
- B. Layer 2 forwarding construct
- C. tenant
- D. physical domain

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 10

Which setting prevents the learning of Endpoint IP addresses whose subnet does not match the bridge domain subnet?

- A. "Limit IP learning to network" setting within the bridge domain.
- B. "Limit IP learning to subnet" setting within the EPG.
- C. "Limit IP learning to network" setting within the EPG.
- D. "Limit IP learning to subnet" setting within the bridge domain.

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 10

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.
- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.
- D. The source IP address of the traffic is learned as a remote endpoint.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 11

Refer to the exhibit.


```
<fvTenant name="ACILab">
  <fvCtx name="pvn1"/>
  <fvBD name="bd1">
    <fvRsCtx tnFvCtxName="pvn1"/>
    <fvSubnet ip="10.1.100.1/24"/>
  </fvBD>
</fvTenant>
```

Which two objects are created as a result of the configuration? (Choose two.)

- A. application profile
- B. attachable AEP
- C. bridge domain
- D. endpoint group
- E. VRF

Answer: CE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_Guide_chapter_01110.html

NEW QUESTION 13

What must be enabled in the bridge domain to have the endpoint table learn the IP addresses of endpoints?

- A. L2 unknown unicast: flood
- B. GARP based detection
- C. unicast routing
- D. subnet scope

Answer: C

Explanation:

Reference: <https://hsvglobalschool.in/dhkycw/cisco-aci-bridge-domain.html>

NEW QUESTION 15

An engineer configured Layer 2 extension from the ACI fabric and changed the Layer 2 unknown unicast policy from Flood to Hardware Proxy. How does this change affect the flooding of the L2 unknown unicast traffic?

- A. It is forwarded to one of the spines to perform as a spine proxy.
- B. It is flooded within the whole fabric.
- C. It is dropped by the leaf when the destination endpoint is not present in the endpoint table.
- D. It is forwarded to one of the APICs to perform as a proxy.

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 19

Which two actions extend a Layer 2 domain beyond the ACI fabric? (Choose two.)

- A. extending the routed domain out of the ACI fabric
- B. creating a single homed Layer 3 Out
- C. creating an external physical network
- D. extending the bridge domain out of the ACI fabric
- E. extending the EPG out of the ACI fabric

Answer: AE

NEW QUESTION 23

When Cisco ACI connects to an outside Layers 2 network, where does the ACI fabric flood the STP BPDU frame?

- A. within the bridge domain
- B. within the APIC
- C. within the access encap VLAN
- D. between all the spine and leaf switches

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c07-732033.html#_Toc395143571

NEW QUESTION 27

Which type of port is used for in-band management within ACI fabric?

- A. spine switch port
- B. APIC console port
- C. leaf access port
- D. management port

Answer: C

NEW QUESTION 31

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB
- E. HTTPS

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html

NEW QUESTION 34

In the context of ACI Multi-Site, when is the information of an endpoint (MAC/IP) that belongs to site 1 advertised to site 2 using the EVPN control plane?

- A. Endpoint information is not exchanged across sites unless COOP protocol is used.
- B. Endpoint information is not exchanged across sites unless a policy is configured to allow communication across sites.
- C. Endpoint information is exchanged across sites as soon as the endpoint is discovered in one site.
- D. Endpoint information is exchanged across sites when the endpoints are discovered in both sites.

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739609.html#CiscoACIMultiSiteoverlaydataplane>

NEW QUESTION 35

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)