

Juniper

Exam Questions JN0-348

Enterprise Routing and Switching - Specialist (JNCIS-ENT)



NEW QUESTION 1

Click the Exhibit button.

```
user@host# show
    firewall {
        family ethernet-switching {
            filter ingress-vlan-limit-guest {
                term guest-to-guest {
                    from {
                        destination-address 192.0.2.33/28;
                    }
                    then {
                        accept;
                    }
                }
                term no-guest-employee-no-peer-to-peer {
                    from {
                        destination-mac-address 00.05.5E.00.00.DF;
                    }
                    then {
                        accept;
                    }
                }
            }
        }
    }
    vlans {
        guest-vlan {
        }
    }
}
```


A recent security audit indicates that peer-to-peer applications are allowed on the guest VLAN and employees may have been using the guest VLAN for this purpose. You deploy the configuration shown in the exhibit, but it does not stop the peer-to-peer traffic. In this scenario, what must you do to implement the security policy?

- A. Implement 802.1X on the guest VLAN
- B. Attach the filter to the VLAN
- C. Deploy storm control to block unknown unicast traffic
- D. Use persistent MAC learning

Answer: B

NEW QUESTION 2

Exhibit.

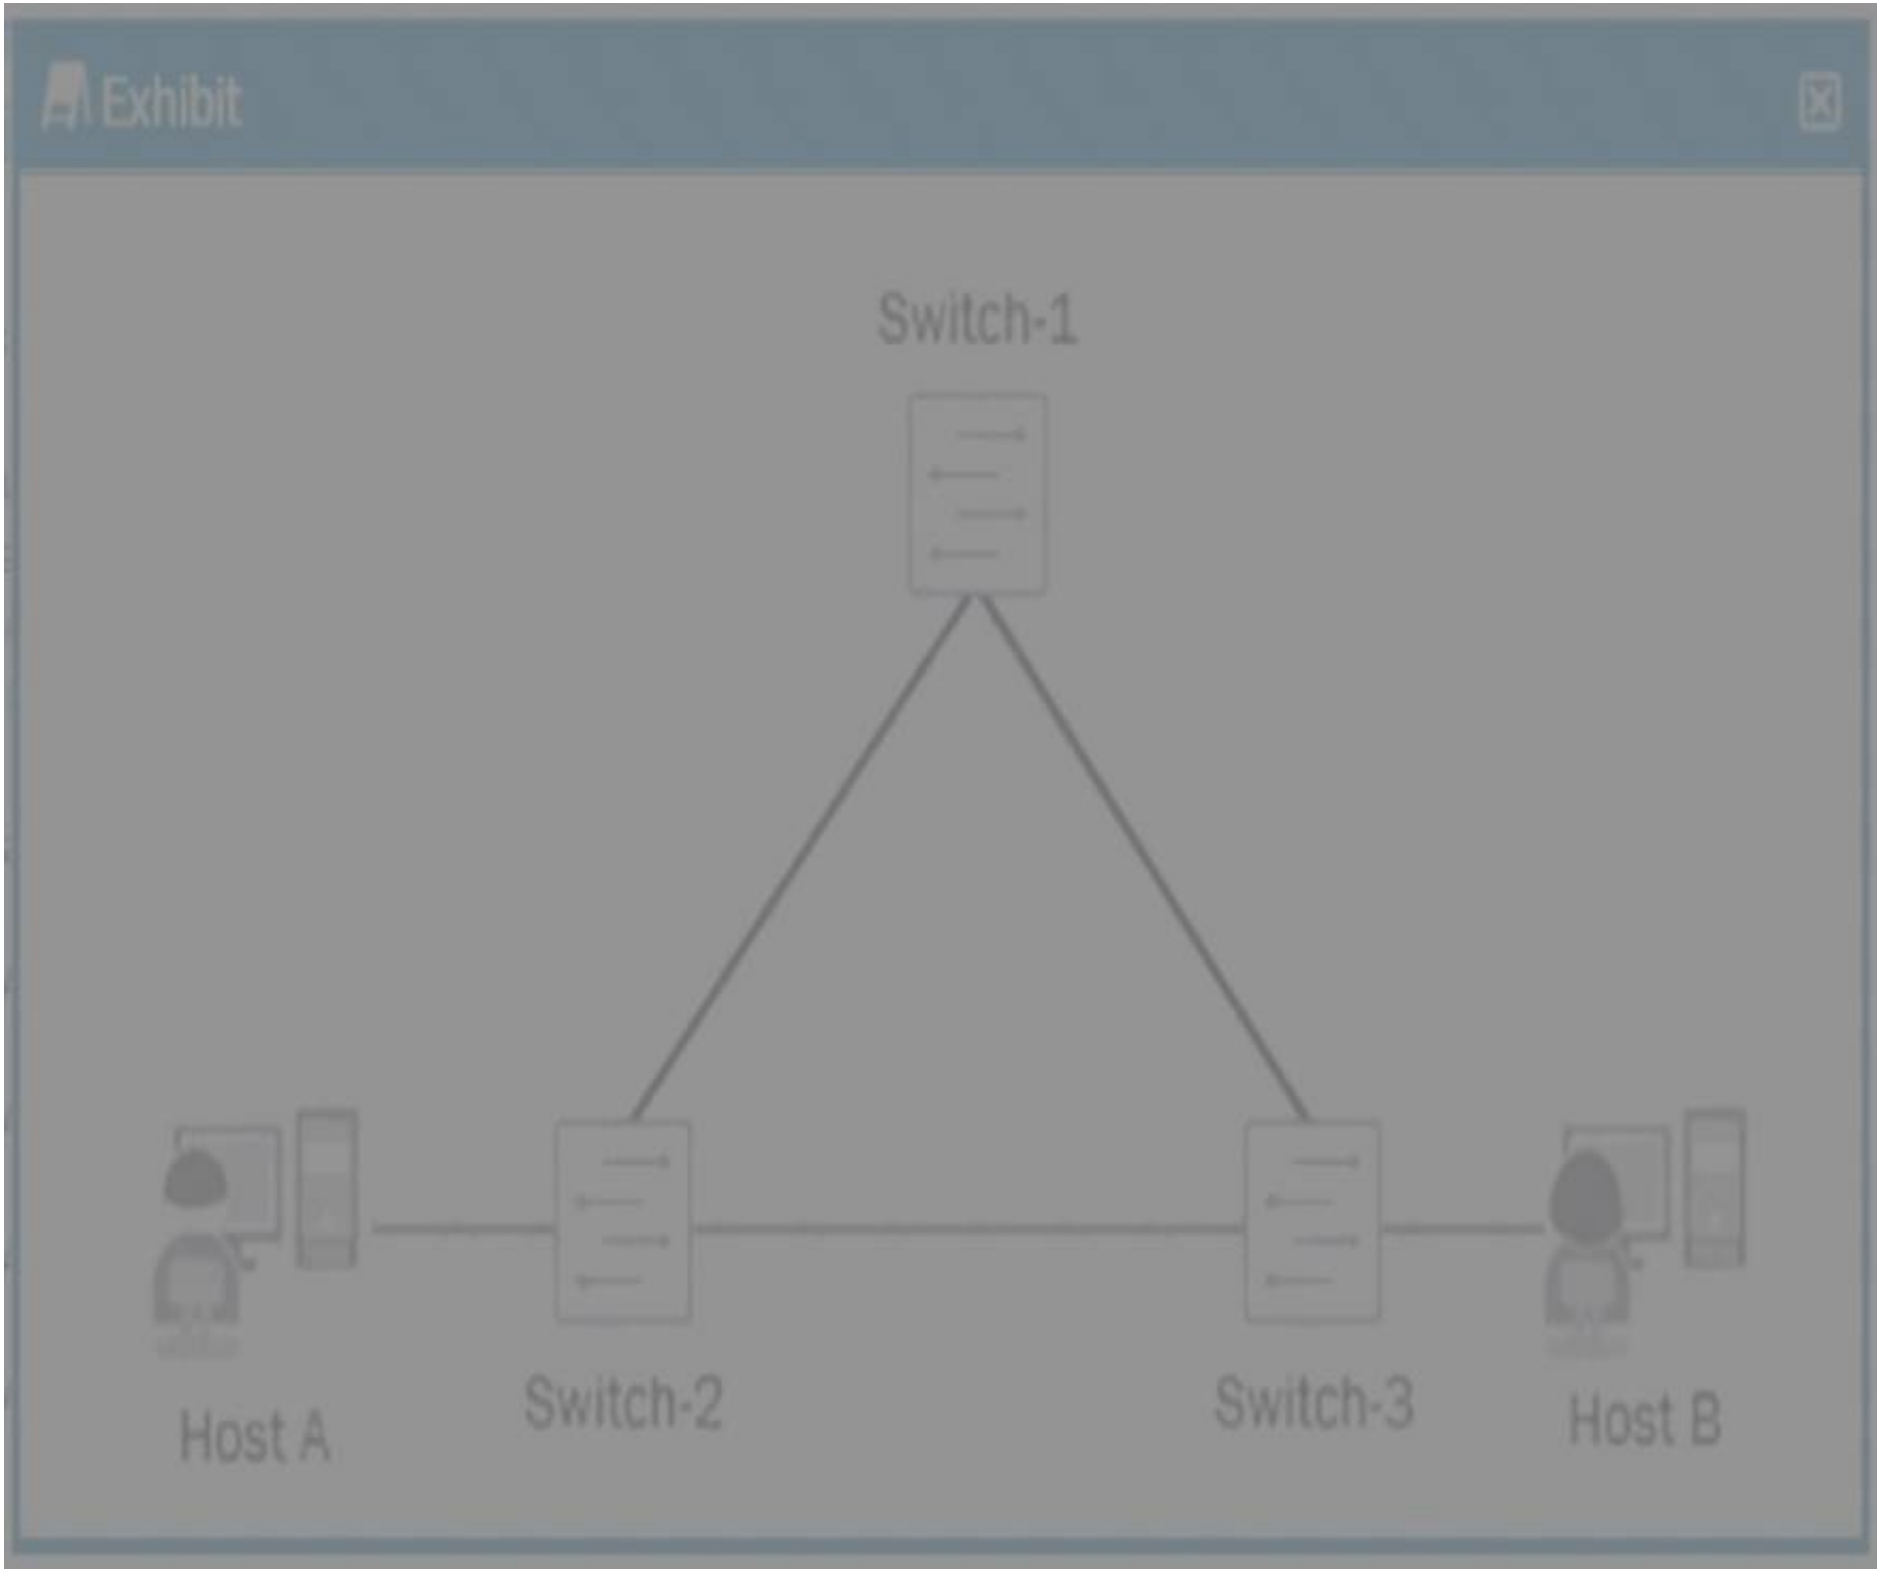

A number of reports from end users indicate that internal and external communications are intermittent and not reliable. You verified the status of the switch ports and have determined that they are up and operational. You also noticed a very high level of link bandwidth utilization on those same ports. The current topology of the affected environment is shown in the exhibit. What would be the cause of the reported issues?

- A. A lack of port-based ACLs filtering the traffic flows.
- B. A malformed route-based ACL Improperly filtering traffic flows.
- C. A misconfigured interior gateway protocol (IGP).
- D. A lack of a loop-prevention mechanism or protocol.

Answer: D

NEW QUESTION 3

Click the Exhibit button.

```
{master:0}
user@switch> show spanning-tree interface
```

Spanning tree interface parameters for instance 0

Interface	Port ID	Designated port ID	Designated bridge ID	Port Cost	State	Role
ge-0/0/8.0	128:521	128:521	8192.50c58daedb41	200	FWD	DESG
ge-0/0/9.0	64:522	64:522	8192.50c58daedb41	2000	FWD	DESG
ge-0/0/14.0	240:527	240:527	8192.50c58daedb41	20000	FWD	DESG
ge-0/0/15.0	128:528	128:528	8192.50c58daedb41	200000	FWD	DESG

Based on the output shown in the exhibit, which statement is correct?

- A. This switch has been elected as the root bridge
- B. This switch has a bridge priority of 32k
- C. The ge-0/0/15 interface is using the default port cost
- D. The ge-0/0/9 interface is using the default priority value

Answer: A

NEW QUESTION 4

Which two statements are true about high availability on Junos devices? (Choose two.)

- A. BFD is faster at detecting failures than default GRE or OSPF timers.
- B. NSR is independent of helper routers to assist the routing platform in restoring routing protocol information.
- C. NSR is dependent on helper routers to assist the routing platform in restoring routing protocol information.
- D. BFD is slower at detecting failures than default GRE or OSPF timers.

Answer: AB

NEW QUESTION 5

Which two situations would cause dynamic ARP inspection to drop traffic? (Choose two.)

- A. If no IP-to-MAC address entry exists in the DHCP snooping database
- B. If the IP address in the ARP packet is deemed invalid
- C. If the requested MAC address exceeds the configured limit on the port
- D. If the ARP packet comes from a port that has been configured as trusted

Answer: AC

NEW QUESTION 6

Which device is used to separate collision domains?

- A. Switch
- B. Router
- C. Hub
- D. firewall

Answer: A

NEW QUESTION 7

Which Junos feature allows you to combine multiple interface into a single bundle?

- A. VRRP
- B. Virtual Classis
- C. LAG
- D. NSB

Answer: C

NEW QUESTION 8

Your network connect to the Internet Through two different ISPs using EBGP. You must ensure that ISP1 is the primary path used for all traffic entering your network while using ISP2 as a backup path.
In this scenario, which statement is correct?

- A. You should use a lower MED value on routes sent to ISP1.
- B. You should assign a higher local preference on routers that you are sending to ISP1.
- C. You should change the next hop for all routes sent to ISP2.
- D. You should your local AS number three times on routes that you are sending to ISP2.

Answer: D

NEW QUESTION 9

An EBGP session sources its TCP connection from which IP address?

- A. The IP address of the primary address assigned to the loopback interface.
- B. The IP address of the preferred address assigned to the loopback interface.
- C. The IP address of the interface that connects the two BGP speakers.
- D. The IP address assigned as the router ID.

Answer: C

NEW QUESTION 10

What are two interarea OSPF LSA types? (Choose two.)

- A. Type 1 router LSAs
- B. Type 2 network LSAs
- C. Type 3 summary LSAs
- D. Type 4 ASBR summary LSAs

Answer: CD

NEW QUESTION 10

Exhibit.

Edit Term: 1

Exhibit

```
(edit protocols bgp)
user@router# show
preference 150;
keep all;
mtu-discovery;
export static-1;
remove-private;
tcp-mss 4096;
group one (
    export static-2;
    peer-as 2;
    neighbor 10.1.0.1 {
        export static-3;
    }
}
group two (
    type internal;
    local-address 192.168.1.11;
    export static-4;
    local-as 1;
    neighbor 192.168.1.12;
    neighbor 192.168.1.13
)
```


Referring to the exhibit, which policy will export routes to IBGP peers?

- A. static-4
- B. static-2
- C. static-1
- D. static.c-2

Answer: A

NEW QUESTION 13

Exhibit.

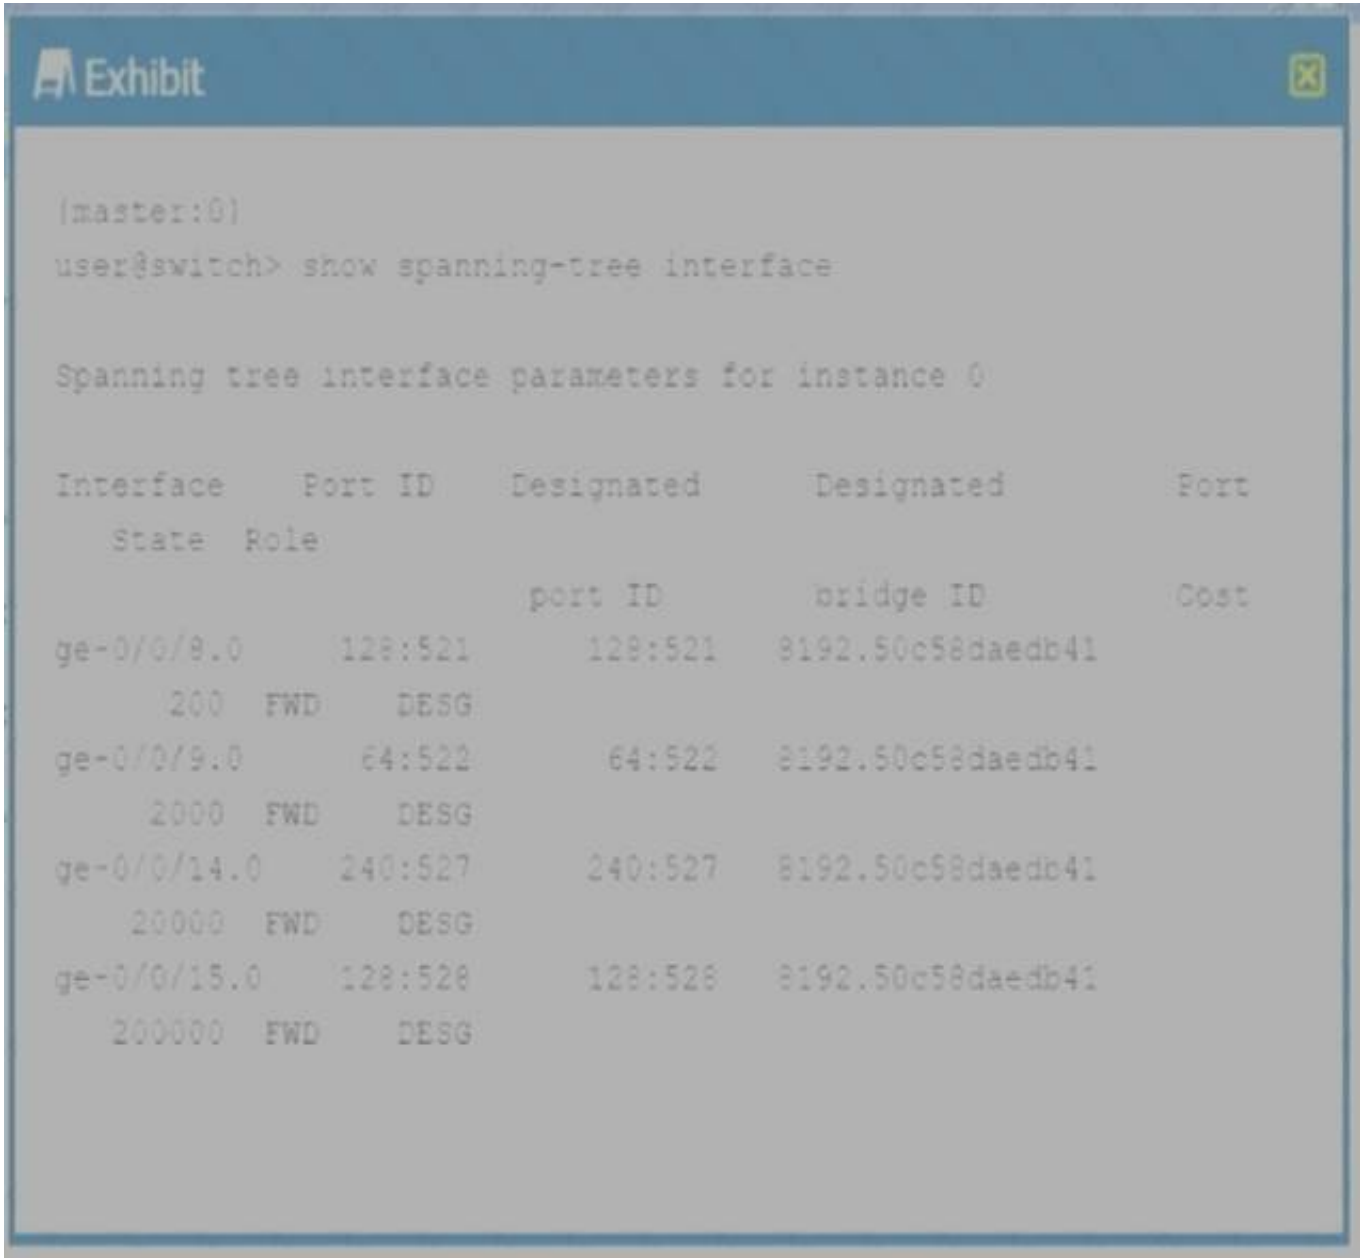

Referring to the exhibit, which statement is correct?

- A. The ge-0/0/15 interface is using the default port cost.
- B. This switch has a bridge priority of 8k.
- C. This switch is currently blocking all traffic.
- D. The ge-0/0/9 interface is using the default interface priority value.

Answer: A

NEW QUESTION 15

You need to a new ESXi host connected to port ge-0/0/1. One of the VMs configured with VLAN 10 is not reachable from any other device on the switch. To troubleshoot, you decide to verify of the VMs MAC address is learned properly under VLAN 10. Which command would you use in this scenario?

- A. Show Ethernet-switching table vlan-id 10
- B. Show interfaces ge-0/0/1 detail
- C. Show vlans 10
- D. Monitor interface ge-0/0/1

Answer: A

NEW QUESTION 19


You have configured the route with an IS-IS metric of 2048. However, the IS-IS interface metric of 63 is being applied for the interface of this router. What must you do to enable larger metric value?

- A. Enable wide metrics.
- B. Disable narrow metrics.
- C. Restart the IS-IS protocol.
- D. Enable level 1 IS-IS routing.

Answer: A

NEW QUESTION 24

Click the Exhibit button.

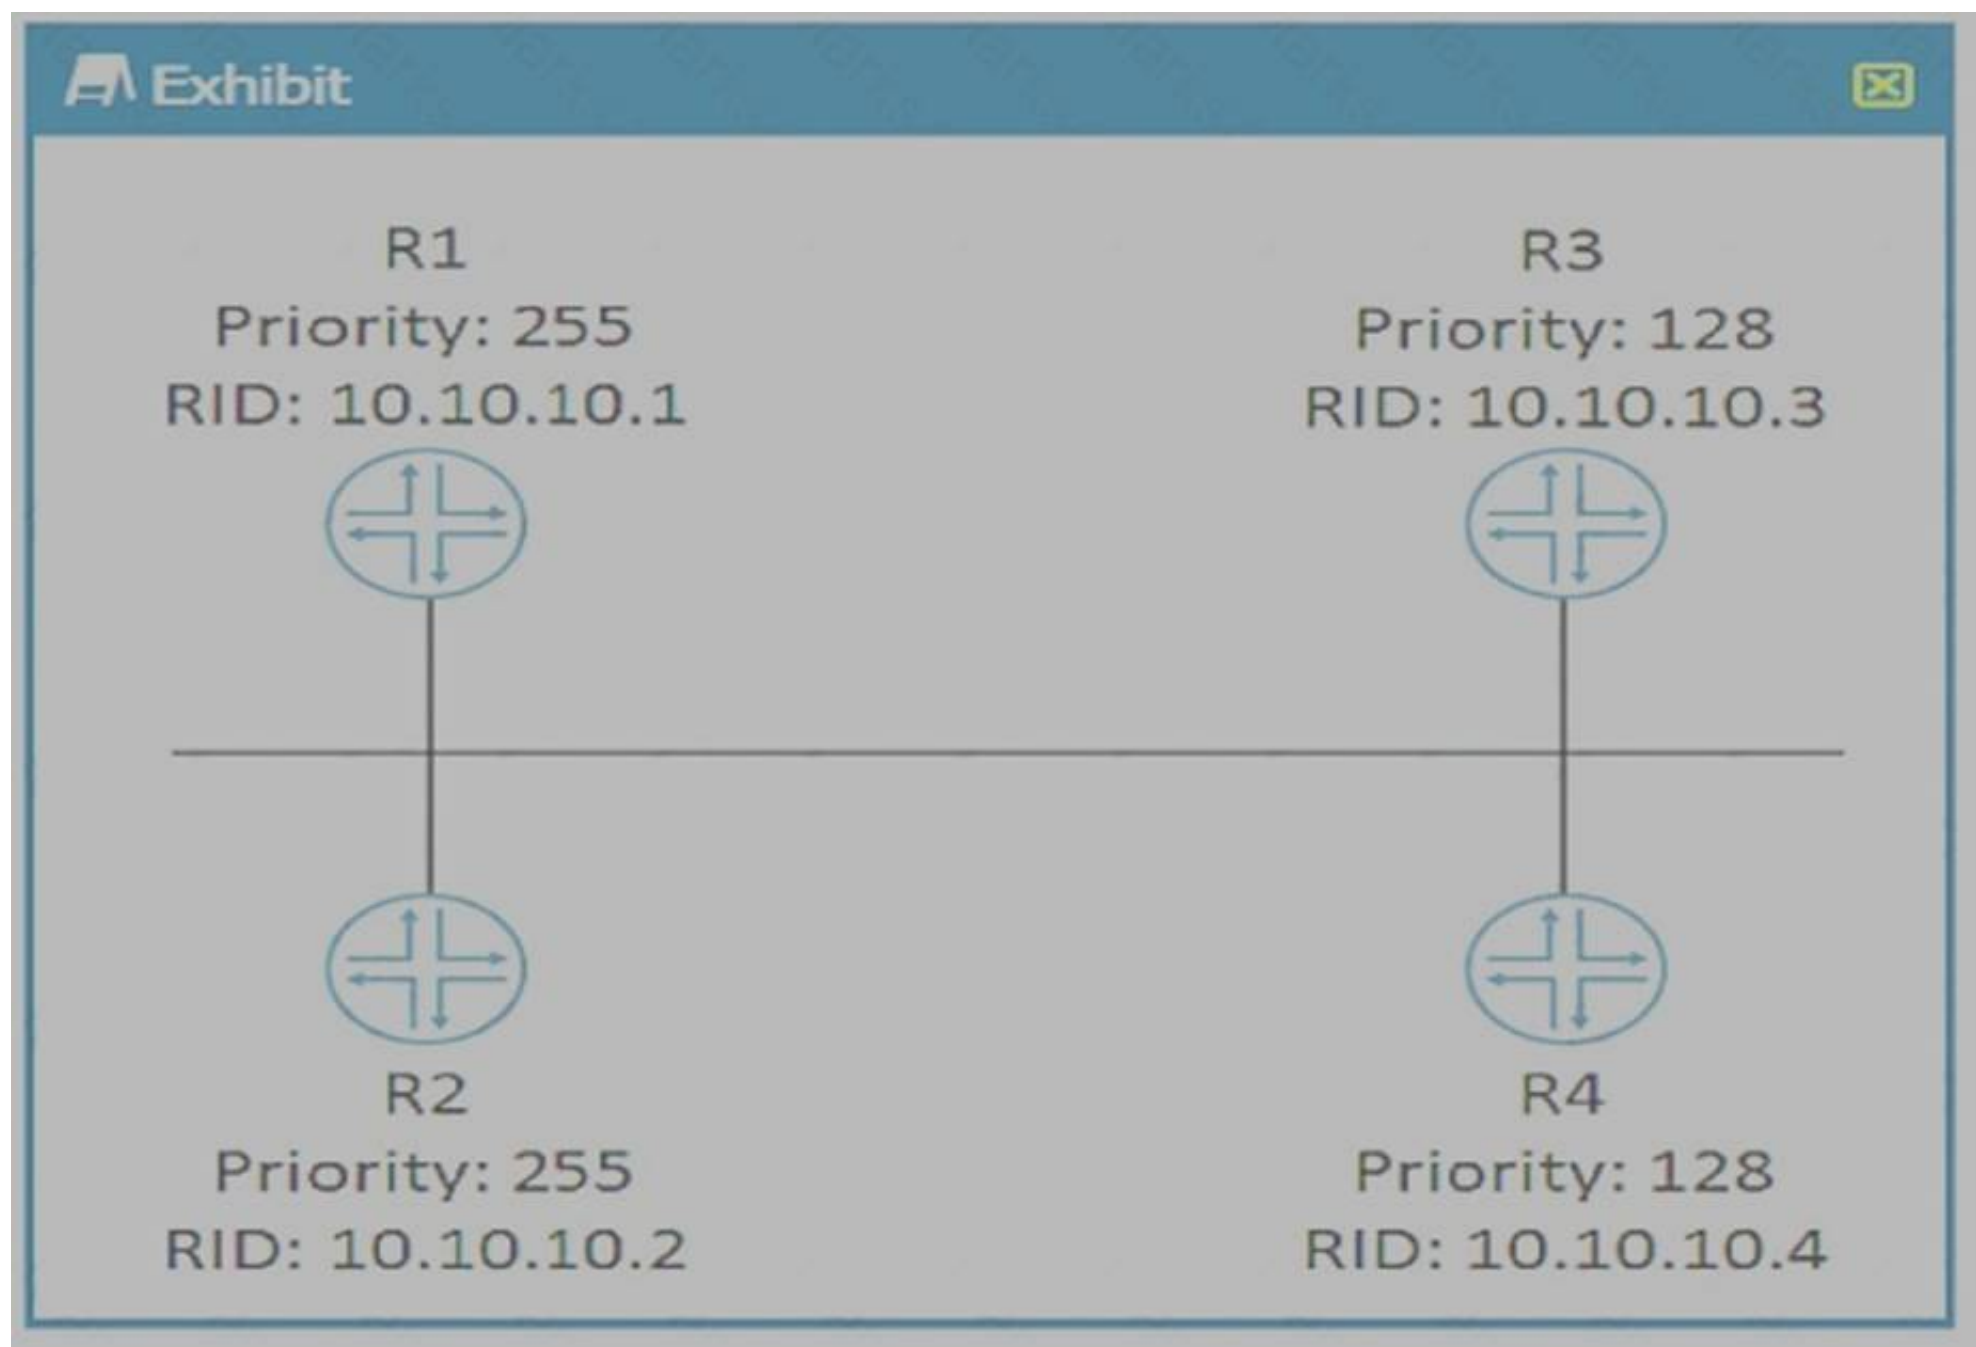


Referring to the exhibit, which router becomes the OSPF DR when all routers are powered on at the same time?

- A. R3
- B. R4
- C. R1
- D. R2

Answer: D

NEW QUESTION 27

Exhibit.

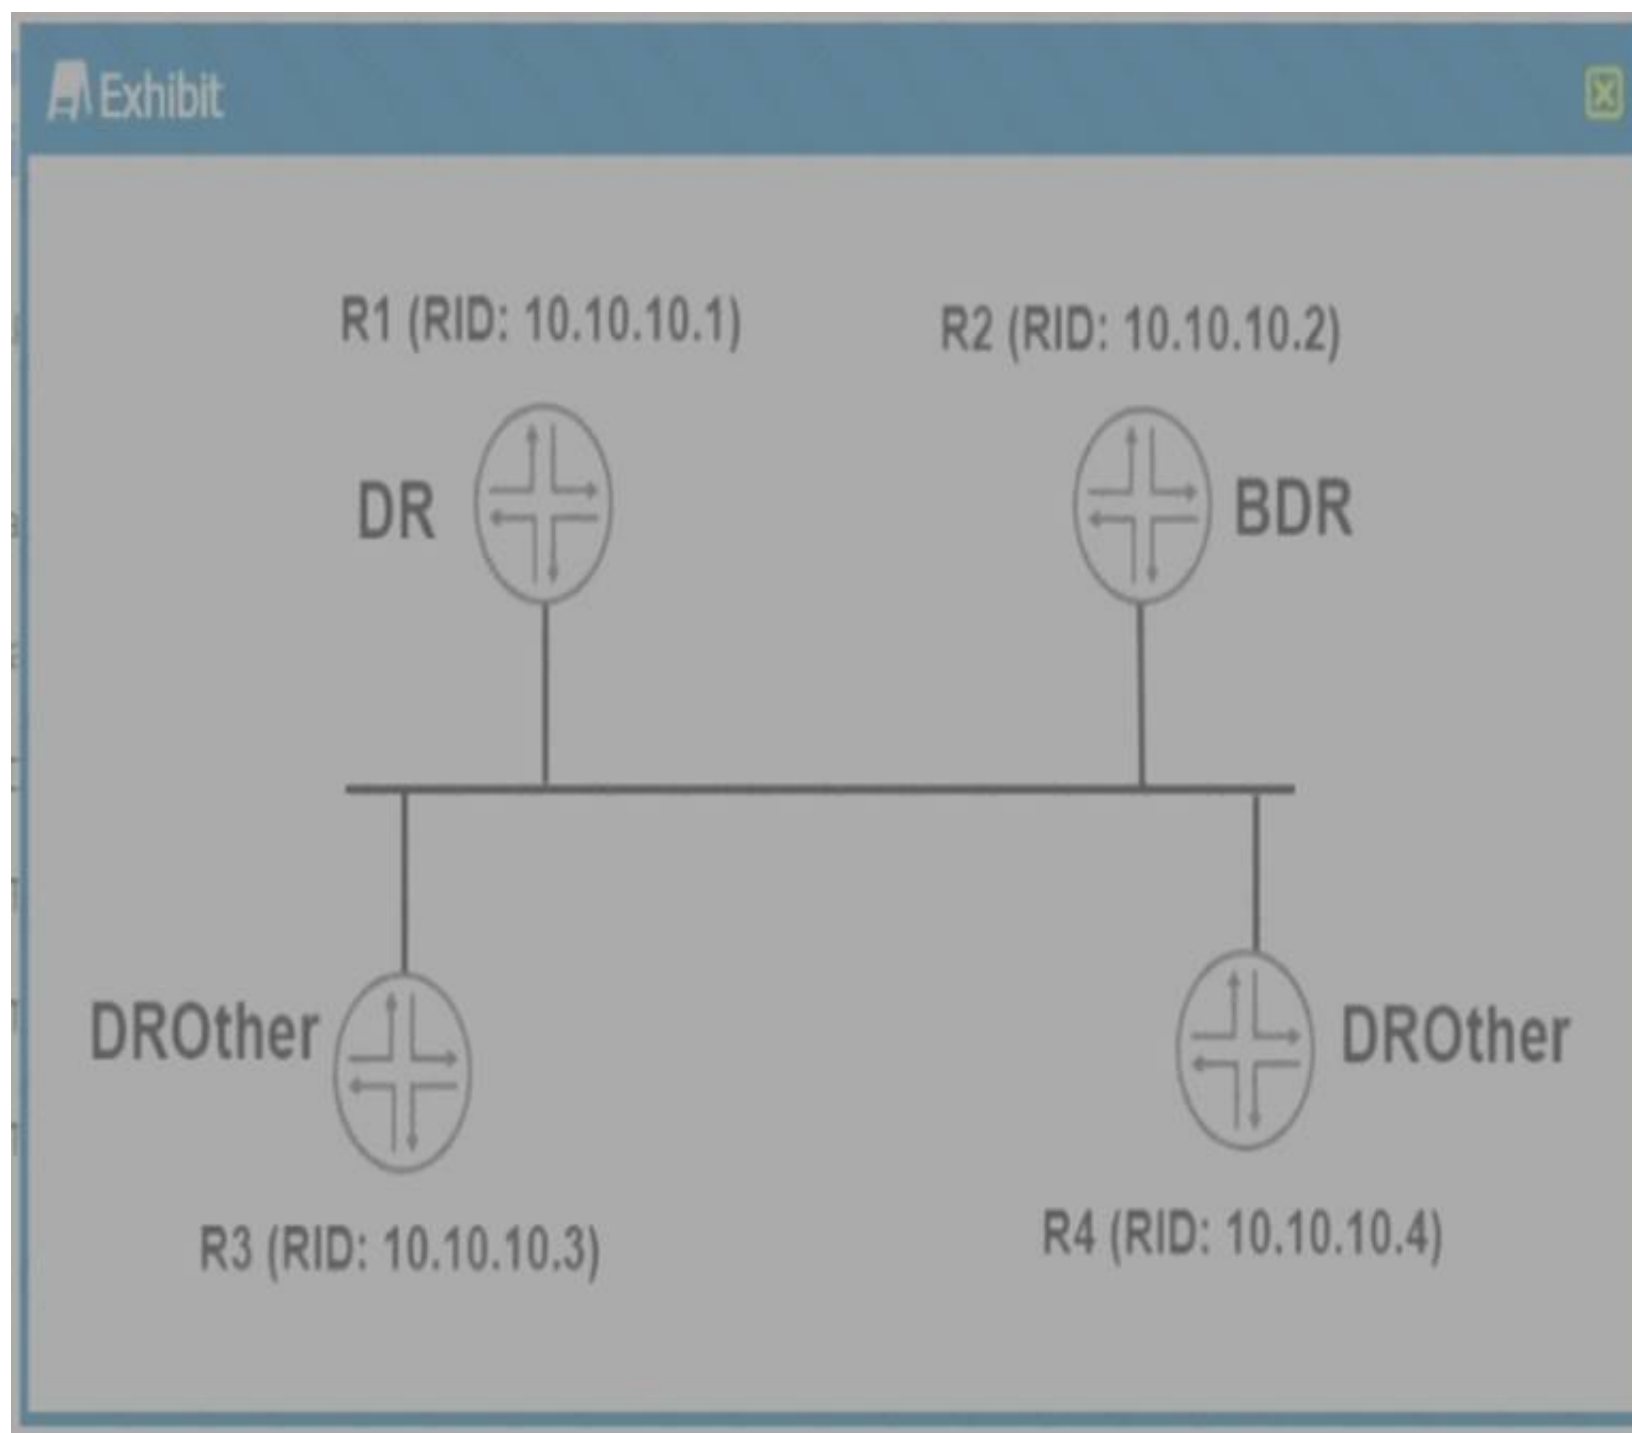

You have configured OSPF routing as shown in the exhibit. You notice that all interfaces have formed full adjacencies, with the exception of the interfaces connecting R3 and R4 with a status of 2Way. What is the reason for this status?

- A. DROther routers will not form a full adjacency with each other.
- B. The two routers must both be configured as DR routers.
- C. The interface-type is not configured as p2p.
- D. The two routers must be configured in different areas.

Answer: A

NEW QUESTION 28

Which statement is true about IP-IP tunnels?

- A. Intermediate devices must have a route to the destination address of the traffic being tunneled.
- B. Intermediate devices must have a route to both the tunnel source address and the tunnel destination address.
- C. Intermediate devices must have a route to the tunnel destination address but do not require a route to the tunnel source address.
- D. Intermediate devices must have a route to the tunnel source address but do not require a route to the tunnel destination address

Answer: B

NEW QUESTION 33

When configuring firewall filters, which function does the interface-specific parameter enable on an EX Series switch?

- A. The interface-specific parameter is required to configure port-specific counters.
- B. The interface-specific parameter is required to configure VLAN-specific counters.
- C. The interface-specific parameter is required to configured VLAN-based filters.
- D. The interface-specific parameter is required to configured port-based firewall filters.

Answer: A

NEW QUESTION 36

What is the default BGP group type on a Junos device?

- A. Internal
- B. External
- C. Multihop
- D. null

Answer: B

NEW QUESTION 38

Which three mechanisms are associated with the bridging process? (Choose three.)

- A. blocking
- B. flooding
- C. aging
- D. filtering
- E. listening

Answer: BCD

NEW QUESTION 41

What are two methods for reducing the size of an OSPF link-state database? (Choose two.)

- A. Use unique router IDs where possible.
- B. Use identical link metrics where possible.
- C. Use point-to-point interface types where possible
- D. Use stub areas where possible.

Answer: CD

NEW QUESTION 43

What are two characteristics of OSPF ABRs? (Choose two.)

- A. ABRs transmit routing information between the backbone and other areas.
- B. ABRs cannot be part of the backbone and another area at the same time.
- C. ABRs inject information from outside the OSPF domain.
- D. ABRs link two OSPF areas

Answer: AD

NEW QUESTION 47

Click the Exhibit button.

```
user@router> show bgp neighbor 192.168.200.2
Peer: 192.168.200.2+179 AS 11685 Local: 192.168.200.1+49469 AS 7029
  Type: External      State: Established      Flags: <ImportEval Sync>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference AddressFamily PeerAS LocalAS Rib-group Refresh>
  Address families configured: inet-unicast inet-vpn-unicast l2vpn-signaling
  Holdtime: 90 Preference: 170 Local AS: 7029 Local System AS: 0
  Number of flaps: 0
  Peer ID: 10.8.241.31      Local ID: 10.8.241.30      Active Holdtime: 90
  Keepalive Interval:30      Group index: 0      Peer index: 0
  BFD: disabled, down
  Local Interface: xe-0/2/3.0
  NLRI for restart configured on peer: inet-unicast inet-vpn-unicast l2vpn
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 11685)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:      0
    Received prefixes:    0
    Accepted prefixes:    0
    Suppressed due to damping: 0
    Advertised prefixes:  0
  Last traffic (seconds): Received 17 Sent 17 Checked 17
  Input messages:  Total 2      Updates 1      Refreshes 0      Octets 42
  Output messages: Total 3      Updates 0      Refreshes 0      Octets 136
  Output Queue[0]: 0
```

Your router is configured to peer with your ISP's router using BGP. You can only control your BGP configuration. Which address families are negotiated between the two BGP peers shown in the exhibit?

- A. inet-unicast inet-vpn-unicast l2vpn-signaling
- B. inet-unicast
- C. inet-vpn-unicast
- D. inet-unicast inet-vpn-unicast l2vpn

Answer: B

NEW QUESTION 50

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

JN0-348 Practice Exam Features:

- * JN0-348 Questions and Answers Updated Frequently
- * JN0-348 Practice Questions Verified by Expert Senior Certified Staff
- * JN0-348 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * JN0-348 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The JN0-348 Practice Test Here](#)